
Sketch No 1 Sheet made of several pieces sewn together

Seam


Inside view

Outside view

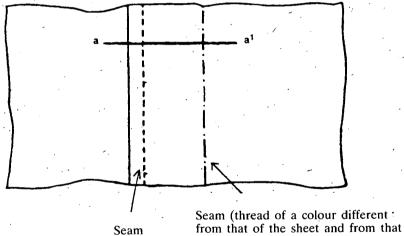

Seam of the other seam)


Section a-a¹
Double flat seam

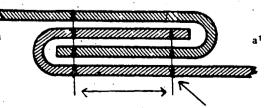


At least 15 mm

Thread visible from the inside only and of a colour different from that of the sheet and from that of the other seam

Sketch No 2
Sheet made of several pieces sewn together

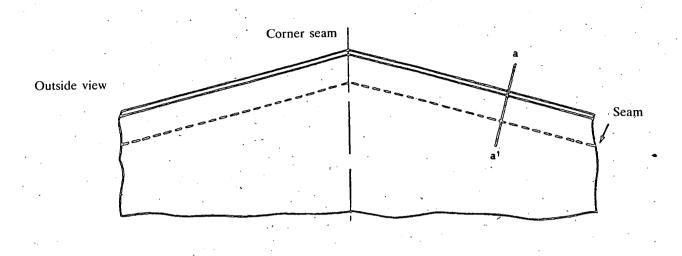


Inside view

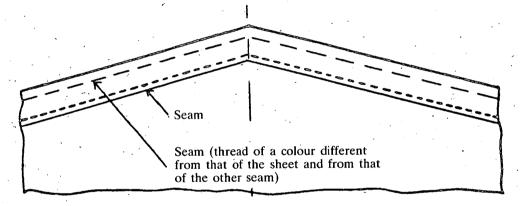


Section a-a1


Thread visible from the inside only and of a colour different from that of the sheet and from that of the other seam




NOTE: The corner seams made according to the method illustrated in Sketch No. 2 (a) in annex 2 of this Convention are also allowed.


Sketch No 3
Sheet made of several pieces welded together

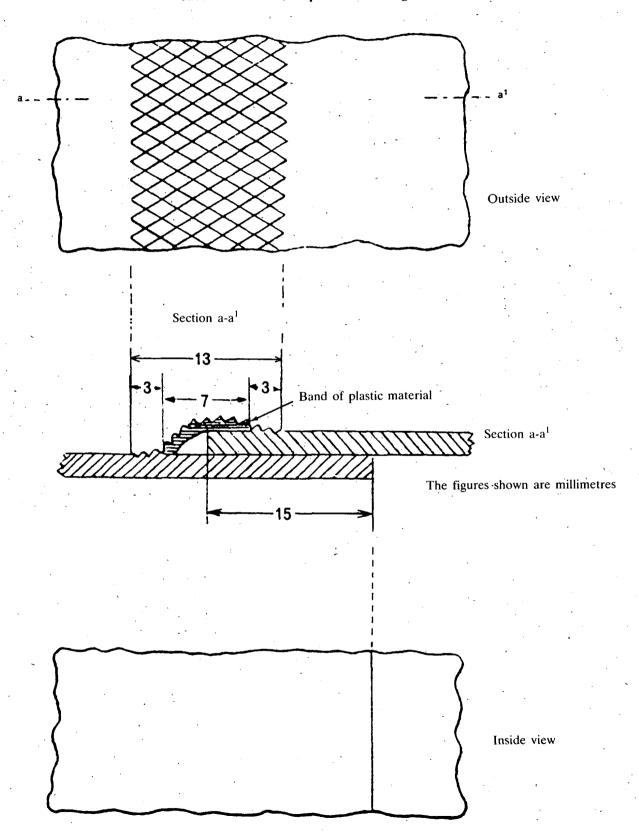



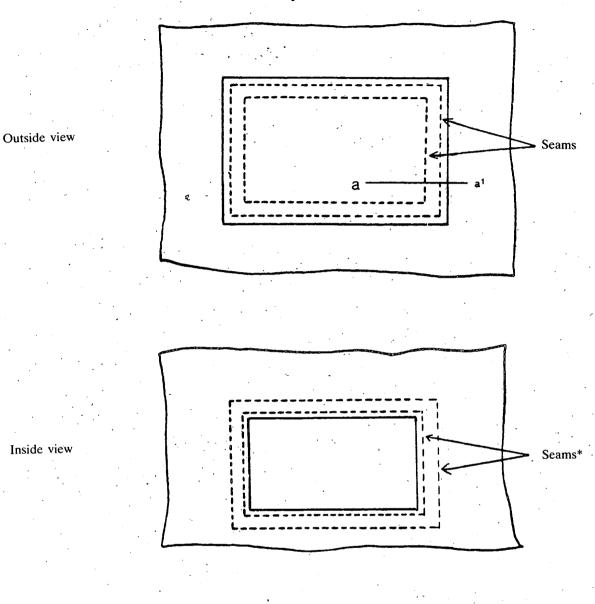

Section a-a1

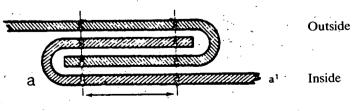


At least 15 mm

^{*} Threads visible from the inside shall be of a colour different from that of the threads visible from the outside and from that of the sheet.

Sketch No 5 **Example of end-piece**

1. Side view: front

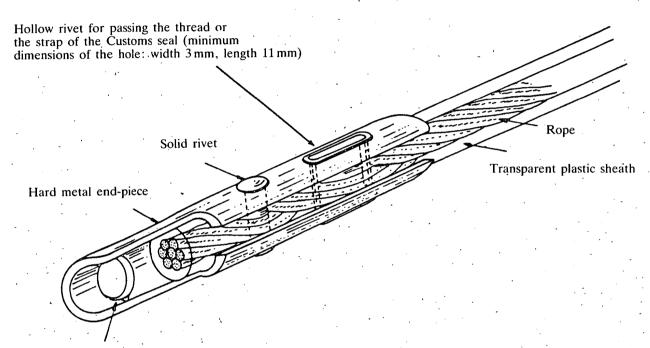

Hole for closing by carrier

