

FINAL ACTS
of the
CEPT T-DAB Planning Meeting (4)
Maastricht, 2002

Special Arrangement of the European Conference of Postal and Telecommunications Administrations (CEPT) relating to the use of the band 1452 – 1479.5 MHz for Terrestrial Digital Audio Broadcasting (T-DAB)

PREAMBLE

The Delegates of the following CEPT Administrations of Member States of the International Telecommunication Union (ITU):

Republic of Austria, Kingdom of Belgium, Republic of Bulgaria, Republic of Croatia, Republic of Cyprus, Czech Republic, Kingdom of Denmark, Republic of Estonia, Republic of Finland, French Republic, Federal Republic of Germany, Hellenic Republic, Republic of Hungary, Ireland, Italian Republic, Republic of Latvia, Principality of Liechtenstein, Republic of Lithuania, Grand Duchy of Luxembourg, Republic of Malta, Republic of Moldova, Kingdom of the Netherlands, Kingdom of Norway, Republic of Poland, Portuguese Republic, Romania, Republic of San Marino, Slovak Republic, Republic of Slovenia, Kingdom of Spain, Kingdom of Sweden, Swiss Confederation, Republic of Turkey, Ukraine, United Kingdom of Great Britain and Northern Ireland, Vatican City State,

meeting in Maastricht, June 2002, for a T-DAB Planning Meeting convened under the terms of Article 6 of the ITU Radio Regulations and following a decision by the Electronic Communications Committee of the CEPT to convene the present Planning Meeting,

have, in signing these Final Acts at this meeting or in application of the provisions of Article 2.2, agreed as follows:

Article 1

To adopt the text of the Special Arrangement as given in the Annex to these Final Acts, referred to as the Maastricht, 2002, Special Arrangement.

Article 2

2.1. The Special Arrangement as given in the Annex shall enter into force on 1 September 2002 at 0001 hours UTC and shall be binding only between contracting administrations that have signed these Final Acts or acceded to the Special Arrangement, after its entry into force, in accordance with the provisions of its Article 7.

2.2. Any CEPT Administration, that has been unable to sign these Final Acts during the present Planning Meeting, or has only signed subject to confirmation, may sign or confirm its signature by correspondence not later than 31 August 2002 at 2400 hours UTC. The signature shall be made without reservations, except that it may be subject to ratification. The Radiocommunications Agency of the Kingdom of the Netherlands will notify all CEPT Administrations not having attended the present Planning Meeting of this possibility. Any CEPT Administration wishing to make use of this procedure shall accordingly notify the Radiocommunications Agency of the Kingdom of the Netherlands, which will immediately take the necessary measures for signature by correspondence.

Article 3

In accordance with No. 6.5 of the Radio Regulations, the Chairman of the ECC, through his administration, shall notify the Secretary-General of the ITU of the conclusion and content of the Special Arrangement including the names of the Administrations that have signed these Final Acts containing the annexed Arrangement or that have acceded to the Maastricht, 2002, Special Arrangement.

IN WITNESS WHEREOF the undersigned representatives of CEPT Administrations, having been duly authorised thereto, have signed the originals in each of the English, French and German languages of these Final Acts, which shall be deposited in the archives of the Radiocommunications Agency of the Kingdom of the Netherlands, which shall forward a copy to each contracting administration.

Done at Maastricht, 18 June 2002

ANNEX

**Special Arrangement
of the European Conference of Postal and Telecommunications
Administrations (CEPT)
relating to the use of the band 1452 – 1479.5 MHz
for Terrestrial Digital Audio Broadcasting (T-DAB)**

Maastricht, 2002

THE CEPT T-DAB PLANNING MEETING (4),

MAASTRICHT, 2002

**Special Arrangement
of the European Conference of Postal and Telecommunications Administrations (CEPT)
relating to the use of the band 1452 – 1479.5 MHz for Terrestrial Digital Audio Broadcasting (T-DAB)**

PREAMBLE

The Delegates of the following CEPT Administrations of Member States of the International Telecommunication Union (ITU):

Republic of Austria, Kingdom of Belgium, Republic of Bulgaria, Republic of Croatia, Republic of Cyprus, Czech Republic, Kingdom of Denmark, Republic of Estonia, Republic of Finland, French Republic, Federal Republic of Germany, Hellenic Republic, Republic of Hungary, Ireland, Italian Republic, Republic of Latvia, Principality of Liechtenstein, Republic of Lithuania, Grand Duchy of Luxembourg, Republic of Malta, Republic of Moldova, Kingdom of the Netherlands, Kingdom of Norway, Republic of Poland, Portuguese Republic, Romania, Republic of San Marino, Slovak Republic, Republic of Slovenia, Kingdom of Spain, Kingdom of Sweden, Swiss Confederation, Republic of Turkey, Ukraine, United Kingdom of Great Britain and Northern Ireland, Vatican City State,

have adopted the following provisions concerning the broadcasting service (T-DAB) in the band 1452 – 1479.5 MHz in the Planning Area as defined in Article 1 of this Special Arrangement, and the Allotment Plan for T-DAB.

ARTICLE 1

Definitions

For the purposes of this Special Arrangement, the following terms shall have the meanings defined below:

- 1.1 ITU:** The International Telecommunication Union.
- 1.2 Radiocommunication Bureau:** The ITU Radiocommunication Bureau.
- 1.3 Radio Regulations:** The Radio Regulations (edition of 2001).
- 1.4 CEPT:** The European Conference of Postal and Telecommunications Administrations.
- 1.5 ECC:** The Electronic Communications Committee of the CEPT.
- 1.6 ERO:** The European Radiocommunications Office.
- 1.7 Special Arrangement:** This Special Arrangement and its Annexes.
- 1.8 Contracting Administration:** Any administration of a Member State of the ITU, which has approved or acceded to this Special Arrangement.
- 1.9 Administration:** Unless otherwise indicated, the term *administration* designates an administration as defined in the ITU Constitution.

- 1.10 Plan:** The Plan forming Annex 1 to this Special Arrangement together with all later modifications.
- 1.11 Planning Area:** The territories of the Contracting Administrations.
- 1.12 Allotment:** Entry in the Plan of a frequency block designated for use by an administration for T-DAB in an Allotment Area under the conditions specified in the relevant annexes. Each allotment may be used for one or more assignments using the technical criteria specified in Annex 4.
- 1.13 Allotment Area:** The coverage area of an allotment, the boundaries of which are defined by geographical co-ordinates associated with this allotment.
- 1.14 Assignment:** Any assignment for which the procedure of Article 6 has been successfully applied.
- 1.15 T-DAB Assignment List:** The list of T-DAB assignments co-ordinated and notified in accordance with this Special Arrangement.
- 1.16 Plan Management Body:** The ERO, tasked by the ECC to manage the procedures of this Special Arrangement.
- 1.17 CEPT T-DAB Planning Meeting, Wiesbaden, 1995:** The CEPT meeting that adopted the Final Acts containing the Special Arrangement of the European Conference of Postal and Telecommunications Administrations (CEPT) relating to the use of the bands 47 – 68 MHz, 87.5 – 108 MHz, 174 – 230 MHz, 230 – 240 MHz and 1452 – 1492 MHz for the introduction of Terrestrial Digital Audio Broadcasting (T-DAB).
- 1.18 CEPT T-DAB Planning Meeting (2), Bonn, 1996:** The CEPT meeting that adopted the Final Acts containing the revision of certain parts of the Special Arrangement, Wiesbaden, 1995.
- 1.19 CEPT T-DAB Planning Meeting (3), Maastricht, 2002:** The CEPT meeting that adopted the Final Acts containing the revision of certain parts of the Special Arrangement, Wiesbaden, 1995, as revised, Bonn, 1996.
- 1.20 Chester Meeting:** The meeting that adopted the Chester, 1997, Multilateral Coordination Agreement relating to Technical Criteria, Coordination Principles and Procedures for the introduction of Terrestrial Digital Video Broadcasting (DVB-T), Chester, 25 July 1997.

ARTICLE 2

Execution of the Special Arrangement

- 2.1** The Contracting Administrations shall apply for their T-DAB stations in the band 1452 – 1479.5 MHz the technical bases specified in Annex 2 to this Special Arrangement.
- 2.2** The Contracting Administrations shall not modify their allotments, except under the conditions provided for in Article 4 of this Special Arrangement.
- 2.3** The Contracting Administrations may bring into use assignments in the band 1452 – 1479.5 MHz in accordance with their allotments in the Plan and only under the conditions set out in Article 6 of this Special Arrangement.
- 2.4** The Contracting Administrations undertake to study and in common agreement to put into practice the measures necessary to eliminate any problems that might result from the application of this Special Arrangement.

ARTICLE 3

Annexes to the Special Arrangement

The Special Arrangement contains the following Annexes:

3.1 *Annex 1:* The T-DAB Frequency Block Allotment Plan

The Frequency Allotment Plan for T-DAB stations of Contracting Administrations in the band 1452 – 1479.5 MHz containing frequency allotments and associated characteristics of T-DAB stations co-ordinated either

- during the CEPT T-DAB Planning Meeting, Wiesbaden, 1995, or
- by the application of provisions contained in the Wiesbaden, 1995, Special Arrangement, or
- during the CEPT T-DAB Planning Meeting (4), or
- by the application of provisions contained in the Maastricht, 2002, Special Arrangement.

3.2 *Other Annexes*

Annex 2: Technical Bases for T-DAB Planning

Annex 3A: Basic characteristics of a T-DAB allotment to be communicated for a modification to the Allotment Plan

Annex 3B: Basic characteristics of a T-DAB assignment to be communicated for the conversion of a T-DAB allotment into one or more assignments

Annex 4: Technical procedures for co-ordination

ARTICLE 4

Procedure concerning modifications to the Plan

4.1 The Allotment Plan for T-DAB established either

- by the CEPT T-DAB Planning Meeting, Wiesbaden, 1995, or
- by the application of provisions contained in the Wiesbaden, 1995, Special Arrangement, or
- by the CEPT T-DAB Planning Meeting (4)

shall be open to modification in accordance with the procedure of this Article. For that purpose the Plan Management Body, on behalf of the ECC, shall maintain the master copy of the Plan containing all modifications made to the Plan.

4.2 If an administration wishes to modify the Plan, it shall apply the procedure below.

4.3 A proposed modification to the Plan may consist of:

4.3.1 a change in the characteristics of an allotment in the Plan;

4.3.2 the inclusion of a new allotment in the Plan;

4.3.3 the suppression of an allotment in the Plan.

4.4 For the purpose of effecting a modification to the Plan, the administration concerned shall:

4.4.1 identify the affected administrations, having regard to the relevant provisions associated with the Plan;

4.4.2 send a request for agreement to the administrations concerned giving the information listed in Annex 3A;

4.4.3 copy this request to the Plan Management Body, taking into account the provisions in 4.6.

- 4.4.4** The actions according to 4.4.1, 4.4.2 and 4.4.3 above shall be taken not earlier than four years, but not later than 20 weeks before the date at which the proposed modification is intended to be converted into an assignment.
- 4.5** The agreement mentioned in 4.4 is not necessary if the proposed modification is:
- 4.5.1** the suppression of an allotment in the Plan;
- 4.5.2** any modification which results in a reduction of the Allotment Area.
- 4.6** The administration proposing a modification to the Plan shall send the information listed in Annex 3A to the Plan Management Body and shall indicate, as the case may be:
- 4.6.1** the names of administrations which have been consulted according to 4.4;
- 4.6.2** that it is not necessary to obtain the agreement of any administration according to 4.5.
- 4.7** The Plan Management Body, upon receiving a copy of the request under 4.4, shall publish the complete information.
- 4.8** Following receipt of the publication, an administration, believing that it should have been included in the request for agreement, shall inform the requesting administration within six weeks of the date of publication, giving its reasons for doing so, and shall also inform the Plan Management Body, requesting that its name be included.
- 4.9** The administration seeking agreement and those administrations with which agreement is sought, may request any additional information they consider necessary.
- 4.10** Replies to a co-ordination request (4.4) shall be given within a period of twelve weeks of the date of publication or direct request.
- 4.10.1** If no reply has been received within this period, an urgent reminder shall be sent.
- 4.10.2** If, two weeks after dispatch of the reminder, no reply has been received, the administration with which co-ordination has been sought shall be considered to have agreed to the proposed change. Justification shall be given for rejecting a request.
- 4.11** When the Plan Management Body has been notified by the administration seeking co-ordination about the results of a co-ordination and finds that this procedure has been successfully concluded, either by obtaining the agreement of the administrations concerned or by the application of 4.10, it shall update the master copy of the Plan. The new or modified allotment in the Plan shall then have the same status as others appearing in the Plan and shall be considered as being in accordance with the Plan.
- 4.12** If required, the Plan Management Body shall send a copy of the revised Plan together with an updated Assignment List at six-monthly intervals to all Contracting Administrations and the Chairman of the ECC who shall send a copy to the Secretary-General of the ITU.
- 4.13** If a modification of an allotment, although made in accordance with the provisions of this Article, results in harmful interference to services of other administrations when it is converted into an assignment, the administration which brought the assignment into use shall, in cooperation with the affected administration, take the necessary action to eliminate such interference in accordance with the relevant provisions of the Radio Regulations.
- 4.14** Administrations shall communicate information to the Plan Management Body in electronic form. For submission of basic characteristics of T-DAB allotments the record-structure specified in Appendix 1 to Annex 3 shall be used.

ARTICLE 5

Compatibility and sharing with other radiocommunication services

Section 1: T-DAB interfering with other radiocommunication services

- 5.1** Any administration intending to convert an allotment into one or more assignments in accordance with Article 6 of this Special Arrangement, in the band 1452 – 1479.5 MHz, shall obtain the agreement of Contracting Administrations whose other radiocommunication services are likely to be affected. However, such agreement is unnecessary if the T-DAB assignment is within the corresponding allotment and the limits referred to in the following sub-sections are not exceeded.
- 5.1.1** Reception of *stations in the mobile service, except the aeronautical mobile service*, operating in the band 1452 - 1492 MHz in conformity with the Radio Regulations on a primary basis is likely to be affected by a proposed T-DAB frequency block assignment if the appropriate limits indicated in Annex 2 are exceeded.
- 5.1.2** Reception of *stations in the fixed service* operating in the band 1452 – 1492 MHz in conformity with the Radio Regulations on a primary basis is likely to be affected by a proposed T-DAB frequency block assignment if the appropriate limits indicated in Annex 2 are exceeded.
- 5.1.3** Reception of *stations in the aeronautical mobile service*, exclusively for the purposes of telemetry, operating in the band 1452 – 1492 MHz in conformity with No. 5.342 of the Radio Regulations is likely to be affected by a proposed T-DAB frequency block assignment if the appropriate limits indicated in Annex 2 are exceeded.
- 5.1.4** Reception of *stations in the broadcasting satellite service* operating in the band 1452 – 1492 MHz in accordance with Resolution 528 (WARC 92) is likely to be affected by a proposed T-DAB frequency block assignment if the appropriate limits indicated in Annex 2 are exceeded.

Section 2: Other radiocommunication services interfering with T-DAB

- 5.2** Any administration intending to bring into service a station of another radiocommunication service in accordance with this Special Arrangement shall obtain the agreement of other Contracting Administrations whose T-DAB allotments are likely to be affected.
- 5.2.1** T-DAB allotments in the band 1452 – 1479.5 MHz which are in conformity with this Special Arrangement are likely to be affected by a proposed assignment to a station in the mobile service if the appropriate limits indicated in Annex 2 are exceeded.
- 5.2.2** T-DAB allotments in the band 1452 – 1479.5 MHz which are in conformity with this Special Arrangement are likely to be affected by a proposed assignment to a station in the fixed service if the appropriate limits indicated in Annex 2 are exceeded.
- 5.2.3** T-DAB allotments in the band 1452 – 1479.5 MHz which are in conformity with this Special Arrangement are likely to be affected by a proposed assignment to a station in the aeronautical mobile service operating in accordance with No. 5.342 of the Radio Regulations if the appropriate limits indicated in Annex 2 are exceeded.

ARTICLE 6

Conversion of an allotment into one or more assignments and the associated co-ordination and notification procedures

Section 1: Basic principles of the conversion of an allotment into one or more assignments

- 6.1.1** When an administration intends to convert an allotment which is in accordance with this Special Arrangement into one or more assignments, or to modify a T-DAB assignment, it shall, using the procedures in Annex 4, determine if the assignment exceeds the field strength limits of the corresponding allotment in the Plan. If the limits are not exceeded, co-ordination is not required and the procedure in Section 2 below shall be applied. Otherwise, co-ordination is required and the procedure in Section 3 shall be applied.

- 6.1.2** When an administration intends to suppress an assignment from the Assignment List, the same procedure as for the suppression of an allotment shall be used (see Article 4).

Section 2: Cases where co-ordination is not required

- 6.2.1** The administration shall send details of the proposed new or modified assignment to the Plan Management Body who shall publish these details.
- 6.2.2** An administration considering that co-ordination may be required shall, within six weeks of the date of publication, inform the requesting administration giving its reasons for doing so, with a copy to the Plan Management Body.
- 6.2.3** If there are no requests for co-ordination within six weeks of the date of publication, the Plan Management Body shall, upon request of the administration, include the assignment in the T-DAB Assignment List.

Section 3: Cases where co-ordination is required

- 6.3.1** The administration shall, using the procedures listed in Annex 4, identify those administrations likely to be affected and send a request for co-ordination to them. The details listed in Annex 3B of the proposed new or modified assignment, together with the names of administrations with which co-ordination has been sought, shall also be sent to the Plan Management Body who shall publish these details.
- 6.3.2** Following receipt of this publication, an administration considering that it is also affected shall inform the requesting administration and the Plan Management Body within six weeks, giving its reasons for doing so.
- 6.3.3** Replies to a co-ordination request shall be given within a period of twelve weeks. If no reply has been received within this period, an urgent reminder shall be sent. If, two weeks after dispatch of the reminder, no reply has been received, the administration with which co-ordination has been sought shall be considered to have agreed to the proposed assignment.
- 6.3.4** The requesting and affected administrations shall, by mutual agreement, decide whether it is necessary to apply the procedure described in Article 4 to obtain a modification to the Plan.
- 6.3.5** If the administrations concerned decide that application of the Article 4 procedure is not necessary because an agreement on the technical characteristics of the assignment was obtained in the course of consultations, the requesting administration shall inform the Plan Management Body of these technical characteristics. This assignment shall be considered as in accordance with the Plan and the Plan Management Body shall include it in the T-DAB Assignment List.
- 6.3.6** If the administrations concerned decide that application of the Article 4 procedure is necessary, the requesting administration shall apply the Article 4 procedure and inform the Plan Management Body accordingly.

Section 4: Co-ordination of new assignments and suppression of assignments to stations of other radiocommunication services

- 6.4.1** An administration may at any time assign frequencies to stations of other radiocommunication services in the band 1452 – 1479.5 MHz provided that the relevant limits specified in Annex 2 are not exceeded. If they are exceeded, the agreement of any affected administrations shall be obtained by means of bilateral or multilateral agreements.
- 6.4.2** When an administration intends to suppress an assignment to a station or, where applicable, a service area of other radiocommunication services in the band 1452 – 1479.5 MHz, it shall inform the administrations with which co-ordination of the station or service area had been carried out. The administration shall also inform the Plan Management Body.

Section 5: Notification of T-DAB assignments to the Radiocommunication Bureau

- 6.5.1** When a Contracting Administration proposes to bring into use a T-DAB assignment in accordance with this Special Arrangement, it shall seek the agreement of non-Contracting Administrations whose services are likely to be affected. The result of co-ordination shall be sent to the Radiocommunication Bureau when notifying the T-DAB assignment in accordance with the provisions of Article 11 of the Radio Regulations. The Contracting Administration shall also indicate that the assignment is in accordance with this Special Arrangement.
- 6.5.2** Notices of T-DAB assignments in accordance with this Special Arrangement will not be examined by the Radiocommunication Bureau with respect to harmful interference to or from the assignments recorded in the ITU Master Register on behalf of Contracting Administrations.
- 6.5.3** Notices of T-DAB assignments in accordance with this Special Arrangement in the band 1452 – 1479.5 MHz shall include a specific reference to the fact that the station will be operated in accordance with the provisions of Resolution 528 (WARC-92) in respect of relations with non-Contracting Administrations.

Section 6: Status of T-DAB assignments in the Assignment List

- 6.6.1** In relations between Contracting Administrations, T-DAB assignments which are part of the Plan and included in the T-DAB Assignment List have the same status and have the degree of protection defined in the technical annexes to this Special Arrangement, irrespective of the date on which they are brought into service.
- 6.6.2** In relations between Contracting Administrations, the status and protection of T-DAB assignments in the band 1452 – 1479.5 MHz as described in 6.6.1 should not be changed when the provisions of a future plan for the broadcasting-satellite service (sound) and the procedures for the co-ordinated use of complementary terrestrial broadcasting come into force, as envisaged by Resolution 528 (WARC-92). However, the provisions of the current Radio Regulations shall apply in relations with non-Contracting Administrations.

Section 7: Exchange of information

- 6.7** Administrations shall communicate information to the Plan Management Body in electronic form. For submission of basic characteristics of T-DAB assignments the record-structure specified in Appendix 2 to Annex 3 shall be used.

ARTICLE 7

Accession to the Special Arrangement

- 7.1** Any CEPT Administration which has not signed the Special Arrangement may at any time deposit an instrument of accession with the Chairman of the ECC, who shall immediately inform the other administrations. Accession to the Special Arrangement shall be made without reservations and shall apply to the Plan as it stands at the time of accession.
- 7.2** Accession to the Special Arrangement shall become effective on the date on which the instrument of accession is received by the Chairman of the ECC.

ARTICLE 8

Scope of application of the Special Arrangement

- 8.1** The Special Arrangement shall bind Contracting Administrations in their relations with one another but shall not bind those administrations in their relations with non-Contracting Administrations.
- 8.2** If a Contracting Administration enters reservations with regard to any provision of this Special Arrangement, other Contracting Administrations shall be free to disregard such provisions in their relations with the administration which has made such reservations.

ARTICLE 9

Notification of this Special Arrangement to the ITU

- 9** In accordance with No. 6.5 of the Radio Regulations the Chairman of the ECC, through his Administration, shall notify the Secretary-General of the ITU of the conclusion and content of this Special Arrangement and shall provide details of:
- any administration which denounces this Special Arrangement;
 - the expiry of the Special Arrangement;
 - any administration which accedes to this Special Arrangement.

ARTICLE 10

Denunciation of the Special Arrangement

- 10.1** Any Contracting Administration may denounce this Special Arrangement at any time by a notification sent to the Chairman of the ECC, who shall inform the other Contracting Administrations.
- 10.2** Denunciation shall become effective one year after the date on which the Chairman of the ECC receives the notification of denunciation.
- 10.3** On the date on which the denunciation becomes effective, the Plan Management Body shall delete from the Plan the allotments entered in the name of the Administration denouncing the Special Arrangement.

ARTICLE 11

Revision of the Special Arrangement

- 11** With the exception of modifications to the Plan in accordance with Article 4, a revision of this Special Arrangement shall be decided only by the Contracting Administrations at a CEPT meeting convened by the ECC in accordance with its procedures, to which at least all the Contracting Administrations shall be invited.

ARTICLE 12

Entry into force and duration of the Special Arrangement and other provisions

- 12.1** This Special Arrangement shall enter into force on 1 September 2002, at 0001 hours UTC.
- 12.2** This Special Arrangement and the annexed Plan have been established with a view to meeting the requirements for T-DAB.
- 12.3** This Special Arrangement shall remain in force until it is abrogated by the Contracting Administrations at a CEPT meeting convened by the ECC in accordance with its procedures, to which all the Contracting Administrations shall be invited.
- 12.4** This text shall exist in the English, French and German language, each version being authentic.

ARTICLE 13

Cases where ratification is required

- 13.1** In accordance with the constitutional rules in force in their respective countries, some administrations may only be bound by this Special Arrangement subject to ratification.
- 13.2** The instrument of ratification shall be deposited, in as short a time as possible, with the Radiocommunications Agency of the Kingdom of the Netherlands which shall notify the Contracting Administrations of each deposit of ratification.

ANNEX 1

The T-DAB Frequency Block Allotment Plan

The allotments originating from the Planning Meeting Wiesbaden, 1995, or by the application of provisions contained in the Wiesbaden, 1995, Special Arrangement are contained in Part 1 of this Annex.

The allotments originating from the Planning Meeting Maastricht, 2002 are contained in Part 2 of this Annex.

1. In part 1, the asterisks in the columns 1 and 2 under the heading "Coordination required before the implementation of T-DAB requirements" have the following meaning:

Column 1:	Co-ordination required with the aeronautical telemetry service (XR) in the Russian Federation (see No. 5.342 of the Radio Regulations).
Column 2:	Other general co-ordination conditions.

The column headed "Remarks" identifies Administration with which co-ordination is required.

In part 2, the asterisks in the columns 1 - 9 under the heading "Coordination required before the implementation of T-DAB requirements" have the following meaning:

Column 1:	Co-ordination required with the aeronautical telemetry service (XR) in the Russian Federation (see No. 5.342 of the Radio Regulations).
Column 2:	Co-ordination required with the Ukrainian aeronautical telemetry Service (XU) in accordance with No. 5.342 of the Radio Regulations. In the band 1452 – 1479.5 MHz, Ukraine will phase out step by step the aeronautical telemetry service up to the year 2020.
Column 3:	Co-ordination required with Germany (F4) if implemented before 2006.
Column 4:	Co-ordination required with Portugal (FA) if implemented before 2007.
Column 5:	Co-ordination required with Hungary (F3) if implemented before 2008.
Column 6:	Co-ordination required with Switzerland (SD) if implemented before 2008.
Column 7:	Co-ordination required with Turkey (F1) if implemented before 2008.
Column 8:	Co-ordination required with the United Kingdom (F2) if implemented before 2008.
Column 9:	Co-ordination required with Greece (F3) if implemented before 2020.

2. The agreements between individual administrations specified in the column under the heading "Agreement number" are contained in the "Supplementary Information A" to this Special Arrangement.
3. The test points for the T-DAB Allotment Areas specified in the column under the heading "T-DAB Identifier" are also contained in the "Supplementary Information B" to this Special Arrangement.
4. The information described in 2 and 3 above is also available from the Plan Management Body.

Annex 1, Part 1: Allotments transferred from the Plan, adopted at Wiesbaden, 1995

T-DAB Identifier	Name	Block Identifier	Agreement number	Co-ordination required before the implementation of T-DAB requirements		Remarks
				1	2	
AUT00001	BURGENLAND	LA	3746 3493			
AUT00009	WIEN	LF	0419			
AUT01001	BURGENLAND	LC	1522 3500 3494			
AUT01002	KAERNTEN	LB	1523 3495			
AUT01003	NIEDEROESTERREICH	LH	1524 3496			
AUT01004	OBEROESTERREICH	LB	1525			
AUT01005	SALZBURG	LG	1521 3504			
AUT01006	STEIERMARK	LI	1520 3497			
AUT01007	TIROL	LI	3498 3519 1519 3505			
AUT01008	VORARLBERG	LG	1518			
AUT01009	WIEN	LB	1517			
BEL10005	OOSTENDE	LB	4919			
BEL20004	DAB-NAMUR	LH	4918			
BEL20005	DAB-LUXEMBOURG	LI	4989			
BEL20006	DAB-LIEGE	LF	4917			
BEL30001	DAB-DEUTSCHSPR GEM	LB	2817			
BEL30002	DAB-DEUTSCHSPR GEM	LG				
BUL10001	SOFIA	LF				
BUL10002	VARNA	LH	3973			
BUL10003	PLOVDIV	LE	3736 3974		*	GRC
BUL10004	STARA ZAGORA	LF	3737 3975		*	GRC
BUL10005	BLAGOEVGRAD	LA	3738		*	GRC
BUL10006	RUSE	LG				
BUL10007	MONTANA	LG				
BUL10008	PLEVEN	LH				
CVA00006	CVA - VATICAN RADIO	LI				
CZE00001	CZE PRIORITY 2	LC				
D__00020	SH-NORDWEST	LC				
D__00021	SH-WEST	LE				

T-DAB Identifier	Name	Block Identifier	Agreement number	Co-ordination required before the implementation of T-DAB requirements		Remarks
				1	2	
D__00022	SH-MITTE	LI				
D__00023	SH-SUED	LG	3716			
D__00024	SH-OST	LA				
D__00025	NEUWERK ZU HAMBURG	LH				
D__00026	HAMBURG	LB				
D__00027	MECKLENBURG A	LE				
D__00028	MECKLENBURG B	LD				
D__00029	MECKLENBURG C	LI				
D__00030	MECKLENBURG D	LB	3547			
D__00031	NIEDERSACHSEN 1	LD				
D__00032	NIEDERSACHSEN 2 N	LA	3517			
D__00033	NIEDERSACHSEN 3	LB				
D__00034	NIEDERSACHSEN 4	LC				
D__00035	NIEDERSACHSEN 5	LE				
D__00036	NIEDERSACHSEN 6	LC				
D__00037	BREMEN	LF				
D__00038	BREMERHAVEN	LB				
D__00039	BRANDENBURG A	LE				
D__00040	BRANDENBURG B	LB				
D__00041	BRANDENBURG C	LA	3546			
D__00042	BRANDENBURG D	LC				
D__00043	BRANDENBURG E	LA				
D__00044	BERLIN	LD				
D__00045	NORDRHEIN-WESTFALEN	LH				
D__00046	NORDRHEIN-WESTFALEN	LD				
D__00047	NORDRHEIN-WESTFALEN	LB				
D__00048	NORDRHEIN-WESTFALEN	LA				
D__00049	NORDRHEIN-WESTFALEN	LD				
D__00050	NORDRHEIN-WESTFALEN	LF				
D__00051	NORDRHEIN-WESTFALEN	LC				
D__00052	NORDRHEIN-WESTFALEN	LG				

T-DAB Identifier	Name	Block Identifier	Agreement number	Co-ordination required before the implementation of T-DAB requirements		Remarks
				1	2	
D__00053	NORDRHEIN-WESTFALEN	LA	1508			
D__00054	NORDRHEIN-WESTFALEN	LI				
D__00055	NORDRHEIN-WESTFALEN	LH				
D__00056	NORDRHEIN-WESTFALEN	LB				
D__00057	NORDRHEIN-WESTFALEN	LA				
D__00058	NORDRHEIN-WESTFALEN	LE				
D__00059	NORDRHEIN-WESTFALEN	LC	1509			
D__00060	HE 1	LH				
D__00061	HE 2	LI				
D__00062	HE 3	LD				
D__00063	HE 4	LA				
D__00064	HE 5	LG				
D__00065	HE 6	LA				
D__00066	HE 7	LC				
D__00067	SACHSEN 1	LB				
D__00068	SACHSEN 2	LE				
D__00069	SACHSEN 3	LI				
D__00070	SACHSEN 4	LF				
D__00071	SACHSEN 5	LB				
D__00072	SACHSEN-ANHALT NORD	LA				
D__00073	SACHSEN-ANHALT MITTE	LB				
D__00074	SACHSEN-ANHALT WEST	LD				
D__00075	SACHSEN-ANHALT OST	LC				
D__00076	SACHSEN-ANHALT HALLE	LG				
D__00077	SACHSEN-ANHALT SUED	LF				
D__00078	TH NORD	LB				
D__00079	TH WEST	LC				
D__00080	TH OST	LA				
D__00081	TH SUED	LG				
D__00082	BW 1	LI				
D__00083	BW 2	LD				

T-DAB Identifier	Name	Block Identifier	Agreement number	Co-ordination required before the implementation of T-DAB requirements		Remarks
				1	2	
D__00084	BW 3	LA	1512			
D__00085	BW 4	LE				
D__00086	BW 5	LB				
D__00087	BW 6	LG				
D__00088	BW 7	LG				
D__00089	BW 8	LF				
D__00090	BW 9	LD				
D__00091	BW 10	LC				
D__00092	BW 11	LI	4493			
D__00093	BW 12	LG				
D__00094	BW 13	LA	3417 0449			
D__00095	BW 14	LG				
D__00096	RP 1	LE				
D__00097	RP 2	LH				
D__00098	RP 3	LF				
D__00099	RP 4	LB				
D__00100	SAARLAND	LG				
D__00101	BY1	LE				
D__00102	BY2	LH				
D__00103	BY3	LB				
D__00104	BY4	LE				
D__00105	BY5 1	LF				
D__00106	BY5 2	LD				
D__00107	BY6	LH				
D__00108	BY7	LC				
D__00109	BY8	LA				
D__00110	BY9	LH				
D__00111	BY10	LD				
D__00112	BY11	LB				
D__00113	BY12	LA				
D__00114	BY13	LI				

T-DAB Identifier	Name	Block Identifier	Agreement number	Co-ordination required before the implementation of T-DAB requirements		Remarks
				1	2	
D__00115	BY14	LG				
D__00116	BY15	LI	4523			
D__00117	BY16	LF				
D__00118	BY17	LB				
D__00119	BY18	LH				
D__00123	SH-NORDOST	LB				
D__00124	NIEDERSACHSEN 2 S	LI	4956			
D__00125	SL2/RP5/HE8-9	LD				
D__00130	NIEDERSACHSEN 7	LF				
D__00131	BERLIN II	LI				
D__00132	NORDRHEIN-WESTFALEN	LD				
D__00133	NIEDERSACHSEN 8	LI				
EST00002	EESTI POHJAREGIOON	LE		*		
EST00003	EESTI LOUNAREGIOON	LC		*		
EST00004	EESTI LAANEREGIOON	LF		*		
EST00005	EESTI IDAREGIOON	LA		*		
E__00101	ASTURIAS	LB				
E__00102	CANTABRIA	LH	2868			
E__00103	PAIS VASCO	LE	2869			
E__00104	NAVARRA	LI	2871			
E__00105	LA RIOJA	LA				
E__00106	ARAGON	LH				
E__00107	CATALUNA	LI	3444		*	I
E__00108	VALENCIA	LC				
E__00109	CASTILLA LA MANCHA	LA				
E__00110	MURCIA	LB				
E__00111	ANDALUCIA	LI	2878			
E__00112	EXTREMADURA	LD				
E__00113	MADRID	LB				
E__00114	CASTILLA LEON	LF	2879			
E__00115	GALICIA	LI				

T-DAB Identifier	Name	Block Identifier	Agreement number	Co-ordination required before the implementation of T-DAB requirements		Remarks
				1	2	
E__00116	CEUTA	LB	3460			
E__00117	MELILLA	LA	3462			
E__00118	BALEARES	LE				
E__00119	CANARIAS	LA				
F__03101	FRANCE-101	LF				Subject to special agreement between F and G
F__03102	FRANCE-102	LC	3808			Subject to special agreement between F and G
F__03103	FRANCE-103	LG				Subject to special agreement between F and G
F__03104	FRANCE-104	LD	3076 0381			Subject to special agreement between F and G
F__03105	FRANCE-105	LF				Subject to special agreement between F and G
F__03106	FRANCE-106	LA	3812			Subject to special agreement between F and G
F__03107	FRANCE-107	LB	3813			Subject to special agreement between F and G
F__03108	FRANCE-108	LD	3814			
F__03109	FRANCE-109	LF				
F__03110	FRANCE-110	LC	3816			
F__03111	FRANCE-111	LG				
F__03112	FRANCE-112	LA	3818			
F__03113	FRANCE-113	LC	3819 4939			
F__03114	FRANCE-114	LC	3820			
F__03115	FRANCE-115	LF				
F__03116	FRANCE-116	LC	3822 3275			
F__03117	FRANCE-117	LE	3823			
F__03118	FRANCE-118	LH				
F__03119	FRANCE-119	LA	3825			
F__03120	FRANCE-120	LG				
F__03121	FRANCE-121	LE	3827			
F__03122	FRANCE-122	LF				
F__03123	FRANCE-123	LA	3829 3419			
F__03124	FRANCE-124	LC	3820 3284			
F__03125	FRANCE-125	LB	3831			
F__03126	FRANCE-126	LC	3832			
F__03127	FRANCE-127	LI	3278			

T-DAB Identifier	Name	Block Identifier	Agreement number	Co-ordination required before the implementation of T-DAB requirements		Remarks
				1	2	
F__03128	FRANCE-128	LA	3834			
F__03129	FRANCE-129	LI	3281			
F__03130	FRANCE-130	LC	3836			
F__03131	FRANCE-131	LB	3837			
F__03132	FRANCE-132	LA	3838			
F__03133	FRANCE-133	LC	3839			
F__03134	FRANCE-134	LB	3840			
F__03135	FRANCE-135	LA	3841			
F__03136	FRANCE-136	LC	3842			
F__03137	FRANCE-137	LB	3843			
F__03138	FRANCE-138	LA	3844			
F__03139	FRANCE-139	LF	0398			
F__03140	FRANCE-140	LA	3846			
F__03141	FRANCE-141	LC	0392 3847			
F__03142	FRANCE-142	LA				Subject to special agreement between F and G
F__03143	FRANCE-143	LB				Subject to special agreement between F and G
F__03144	FRANCE-144	LH				Subject to special agreement between F and G
F__03145	FRANCE-145	LB				Subject to special agreement between F and G
F__03146	FRANCE-146	LC				Subject to special agreement between F and G
F__03147	FRANCE-147	LA				Subject to special agreement between F and G
F__03148	FRANCE-148	LB	3854			Subject to special agreement between F and G
F__03149	FRANCE-149	LG				Subject to special agreement between F and G
F__03150	FRANCE-150	LF				Subject to special agreement between F and G
F__03151	FRANCE-151	LD	3857 4423		*	I
F__03152	FRANCE-152	LB				
F__03153	FRANCE-153	LH				
F__03154	FRANCE-154	LC	3860			
F__03155	FRANCE-155	LE				
F__03156	FRANCE-156	LA	3862			
F__03157	FRANCE-157	LI				
F__03158	FRANCE-158	LF				

T-DAB Identifier	Name	Block Identifier	Agreement number	Co-ordination required before the implementation of T-DAB requirements		Remarks
				1	2	
F__03159	FRANCE-159	LC	3865			
F__03160	FRANCE-160	LB	3866			
F__03161	FRANCE-161	LD	0390 3867			
F__03162	FRANCE-162	LI				
F__03163	FRANCE-163	LC	0387			Subject to special agreement between F and G
F__03164	FRANCE-164	LE	3870			Subject to special agreement between F and G
F__03165	TOULOUSE-MURET	LE				
F__03201	FRANCE-201	LE	3871			Subject to special agreement between F and G
F__03202	FRANCE-202	LA	3872 4957			Subject to special agreement between F and G
F__03203	FRANCE-203	LH				Subject to special agreement between F and G
F__03204	FRANCE-204	LI				Subject to special agreement between F and G
F__03205	FRANCE-205	LA	3875			Subject to special agreement between F and G
F__03206	FRANCE-206	LF				Subject to special agreement between F and G
F__03207	FRANCE-207	LE	3877			Subject to special agreement between F and G
F__03208	FRANCE-208	LH				
F__03209	FRANCE-209	LI				
F__03210	FRANCE-210	LB	3880			
F__03211	FRANCE-211	LD	3881 4942			
F__03212	FRANCE-212	LI				
F__03213	FRANCE-213	LE	3883			
F__03214	FRANCE-214	LE				
F__03215	FRANCE-215	LH				
F__03216	FRANCE-216	LA	3886			
F__03217	FRANCE-217	LC	3887			
F__03218	FRANCE-218	LB	3888			
F__03219	FRANCE-219	LF				
F__03220	FRANCE-220	LB	3890			
F__03221	FRANCE-221	LA	3891			
F__03222	FRANCE-222	LH				
F__03223	FRANCE-223	LF				
F__03224	FRANCE-224	LD	3894 3285			

T-DAB Identifier	Name	Block Identifier	Agreement number	Co-ordination required before the implementation of T-DAB requirements		Remarks
				1	2	
F__03225	FRANCE-225	LE				
F__03226	FRANCE-226	LD	3896			
F__03227	FRANCE-227	LF				
F__03228	FRANCE-228	LG				
F__03229	FRANCE-229	LF				
F__03230	FRANCE-230	LD	3900			
F__03231	FRANCE-231	LE	3901			
F__03232	FRANCE-232	LH				
F__03233	FRANCE-233	LE	3903			
F__03234	FRANCE-234	LG				
F__03235	FRANCE-235	LH				
F__03236	FRANCE-236	LD	3906			
F__03237	FRANCE-237	LH				
F__03238	FRANCE-238	LE				
F__03239	FRANCE-239	LG	0388			
F__03240	FRANCE-240	LB				
F__03241	FRANCE-241	LI				
F__03242	FRANCE-242	LI				Subject to special agreement between F and G
F__03243	FRANCE-243	LF				Subject to special agreement between F and G
F__03244	FRANCE-244	LC				Subject to special agreement between F and G
F__03245	FRANCE-245	LG				Subject to special agreement between F and G
F__03246	FRANCE-246	LI				Subject to special agreement between F and G
F__03247	FRANCE-247	LD	3917			Subject to special agreement between F and G
F__03248	FRANCE-248	LE	3918			Subject to special agreement between F and G
F__03249	FRANCE-249	LH				Subject to special agreement between F and G
F__03250	FRANCE-250	LB				Subject to special agreement between F and G
F__03251	FRANCE-251	LI	4426		*	I
F__03252	FRANCE-252	LF				
F__03253	FRANCE-253	LD	3923			
F__03254	FRANCE-254	LI				
F__03255	FRANCE-255	LG				

T-DAB Identifier	Name	Block Identifier	Agreement number	Co-ordination required before the implementation of T-DAB requirements		Remarks
				1	2	
F__03256	FRANCE-256	LH				
F__03257	FRANCE-257	LH				
F__03258	FRANCE-258	LG				
F__03259	FRANCE-259	LE				
F__03260	FRANCE-260	LI				
F__03261	FRANCE-261	LA				
F__03262	FRANCE-262	LG	0397			
F__03263	FRANCE-263	LH				Subject to special agreement between F and G
F__03264	FRANCE-264	LA				Subject to special agreement between F and G
F__03265	TOULOUSE-MURET	LI				
F__03357	LOIRE & RHONE	LE				
F__03358	VALLEE DU RHONE	LA				
F__03363	BRETAGNE SUD	LE				
F__03457	LOIRE & RHONE	LG				
GRC00002	THRAKI-E MACEDONIA	LG	3942 4397		*	TUR
GRC00007	KRITI	LB	3947 4402			
GRC00008	KYKLADES	LC	3948 4403			
GRC00009	DODEKANISA	LA	3949 4404		*	TUR
G__99902	UK_GIB	LE			*	E
HNG00005	HNGSOUTHEAST	LB				
HNG00007	HNGWEST	LD	3427		*	AUT
HNG00008	HNGBALATON	LE	2120			
HNG00009	HNGCENTRE	LF	2121			
HNG00010	HNGNORTHEAST	LC				
HNG00011	HNGSOUTHEAST	LD				
HNG00012	HNGSOUTHWEST	LC				
HNG00014	BUDAPEST	LA				
HOL05006	REGIO 6 DEN HAAG	LA	3734			
HRV00560	HRV2	LF	3552 3655		*	HNG I
HRV00567	HRV1	LE			*	I
HRV00568	HRV2	LB			*	I

T-DAB Identifier	Name	Block Identifier	Agreement number	Co-ordination required before the implementation of T-DAB requirements		Remarks
				1	2	
HRV88011	HRV3	LC	0332 0314		*	I
HRV88012	HRV4	LE			*	I
HRV88013	HRV5	LD	0334 0316		*	I
HRV88014	HRV6	LE	0335		*	I
HRV88015	HRV7	LD	0336		*	I
HRV88016	HRV8	LE	0337		*	I
HRV88017	HRV9	LA				
HRV88018	HRV10	LA				
I__00317	VALLE D'AOSTA UHF	LG			*	HRV
I__00318	PIEMONTE UHF	LF			*	HRV
I__00319	LOMBARDIA UHF	LG	4574		*	HRV
I__00320	ALTO ADIGE UHF	LG	4575		*	HRV
I__00321	TRENTINO UHF	LA	4576		*	HRV
I__00322	VENETO UHF	LB	4577		*	HRV
I__00323	FRIULI V GIULIA UHF	LI	4578		*	HRV
I__00324	LIGURIA UHF	LA	4579		*	HRV
I__00325	EMILIA R UHF	LA	4467 0458		*	HRV
I__00326	MARCHE UHF	LG	4581		*	HRV
I__00327	TOSCANA UHF	LE	4582 0492		*	F HRV
I__00328	UMBRIA UHF	LC	4469 4583		*	HRV
I__00329	LAZIO UHF	LA	4470 4584		*	HRV
I__00330	ABRUZZO UHF	LF	4585		*	HRV
I__00331	MOLISE UHF	LC	4586		*	HRV
I__00332	CAMPANIA UHF	LB	4587 3247		*	HRV
I__00333	PUGLIA UHF	LH	4845 4588		*	HRV
I__00334	BASILICATA UHF	LI	4589 3249		*	HRV
I__00335	CALABRIA UHF	LC	4479 0459		*	HRV
I__00336	SICILIA UHF	LH	3251		*	HRV
I__00337	SARDEGNA UHF	LE	4921		*	F HRV
LIE00001	LIE NATIONAL 1 DAB	LE	3375 3209		*	AUT
LIE00002	LIE NATIONAL 2 DAB	LF	3376			

T-DAB Identifier	Name	Block Identifier	Agreement number	Co-ordination required before the implementation of T-DAB requirements		Remarks
				1	2	
LTU00008	VILNIUS	LC		*		
LTU00009	ZARASAI	LF		*		
LTU00010	KAUNAS	LD		*		
LTU00011	SIAULIAI	LB		*		
LTU00012	KLAIPEDA	LF		*		
LUX00002	LUXEMBOURG2	LE	1731		*	F
LVA00002	KULDIGA	LG		*		
LVA00003	RIGA	LE		*		
LVA00004	ALUKSNE	LA		*		
LVA00005	D_PILS	LC		*		
MCO00001	MCO DAB RQR 01	LC	3935 3717		*	F I
MCO00002	MCO DAB RQR 02	LF	3718		*	I
NOR00009	OSLO AKERSHUS	LD				
POL20001	SZCZECIN	LG		*		
POL20002	GORZWLKP	LE		*		
POL20003	KOSZALIN	LH		*		
POL20004	SLUPSK	LC		*		
POL20005	PILA	LB		*		
POL20006	GDANSK	LE		*		
POL20007	BYDGOSZCZ	LF		*		
POL20008	ELBLAG	LB		*		
POL20009	TORUN	LC		*		
POL20010	PLOCK	LB		*		
POL20011	WLOCLAWEK	LE		*		
POL20012	OLSZTYN	LD		*		
POL20013	SUWALKI	LB		*		
POL20014	CIECHANOW	LF		*		
POL20015	OSTROLEKA	LG		*		
POL20016	LOMZA	LC		*		
POL20017	BIALYSTOK	LE		*		
POL20018	ZIELONA_GORA	LF		*		

T-DAB Identifier	Name	Block Identifier	Agreement number	Co-ordination required before the implementation of T-DAB requirements		Remarks
				1	2	
POL20019	POZNAN	LC		*		
POL20020	LESZNO	LB		*		
POL20021	KONIN	LD		*		
POL20022	KALISZ	LG		*		
POL20023	SIERADZ	LF		*		
POL20024	LODZ	LC		*		
POL20025	SKIERNIEWICE	LG		*		
POL20026	PIOTRKOW_TRYB	LE		*		
POL20027	WARSZAWA	LD		*		
POL20028	RADOM	LF		*		
POL20029	SIEDLCE	LB		*		
POL20030	LUBLIN	LC		*		
POL20031	BIALA_PODL	LF		*		
POL20032	CHELM	LB		*		
POL20033	JELENIA_GORA	LD				
POL20034	LEGNICA	LG		*		
POL20035	WROCLAW	LE		*		
POL20036	WALBRZYCH	LF				
POL20037	OPOLE	LB		*		
POL20038	CZESTOCHOWA	LC		*		
POL20039	KATOWICE	LD				
POL20040	KIELCE	LB		*		
POL20041	KRAKOW	LE				
POL20042	TARNOBRZEG	LG		*		
POL20043	TARNOW	LC				
POL20044	RZESZOW	LD				
POL20045	ZAMOSC	LE		*		
POL20046	PRZEMYSL	LB				
POL20047	BIELSKO-BIALA	LF				
POL20048	NOWY_SACZ	LG				
POL20049	KROSNO	LE				

T-DAB Identifier	Name	Block Identifier	Agreement number	Co-ordination required before the implementation of T-DAB requirements		Remarks
				1	2	
POR30201	MINHO/PORTO	LD				
POR30202	TRÁS-OS-MONTES	LC				
POR30203	BEIRA-LITORAL	LC				
POR30204	BEIRA-ALTA/BAIXA	LI				
POR30205	ESTREMADURA	LD				
POR30206	ALTO-ALENTEJO	LA				
POR30207	BAIXO-ALENTEJO	LC				
POR30208	ALGARVE	LD				
POR30209	FUNCHAL-MACHICO	LD				
POR30210	SANTANA-VICENTE	LG				
POR30211	PORTO-SANTO	LH				
POR30212	AZR/S MIGUEL	LD				
POR30213	AZR/TERCEIRA	LE				
POR30214	AZR/FLORES	LF				
ROU00012	DAB ZONA 1	LD				
ROU00013	DAB ZONA 2	LA				
ROU00014	DAB ZONA 3	LE				
ROU00015	DAB ZONA 4	LB				
ROU00016	DAB ZONA 5	LA				
ROU00017	DAB ZONA 6	LB				
ROU00018	DAB ZONA 7	LA				
ROU00019	DAB ZONA 8	LE				
ROU00020	DAB ZONA 9	LB				
ROU00021	DAB ZONA 10	LC				
ROU00022	DAB ZONA 11	LD				
SMR00002	RADIOTVSANMARINO-4-	LF	4674			
SUI00006	GENEVE 1	LH	4119			
SUI00007	LAUSANNE 2	LA	4120			
SUI00008	MARTIGNY 3	LG				
SUI00009	SION / SIERRE 4	LE	4122			
SUI00010	BRIG GOMS 5	LH	4123			

T-DAB Identifier	Name	Block Identifier	Agreement number	Co-ordination required before the implementation of T-DAB requirements		Remarks
				1	2	
SUI00011	YVERDON 6	LA	4124			
SUI00012	FRIBOURG/FREIBURG 7	LB	3424 4125			
SUI00013	BERNER OBERLAND 8	LA	3266 4126			
SUI00014	NEUCHATEL 9	LG				
SUI00015	BERN 10	LE	4128			
SUI00016	BIEL/BIENNE 11	LC	4129		*	F
SUI00017	JURA 12	LI	4130			
SUI00018	OLTEN 13	LC	4131		*	F
SUI00019	BASEL 14	LD	4132			
SUI00020	AARGAU 15	LI	4133			
SUI00021	LUZERN 16	LB	4134			
SUI00022	SCHAFFHAUSEN 17	LB				
SUI00023	ZUERICH 18	LF				
SUI00024	ZUG 19	LA	4927 4137			
SUI00025	SCHWYZ 20	LG				
SUI00026	URI 21	LE	4139			
SUI00027	WINTERTHUR 22	LD	4928 4140			
SUI00028	ZH OBERLAND 23	LE	4141			
SUI00029	THURGAU 24	LI	4142			
SUI00030	ST GALLEN 25	LC	4143			
SUI00031	GLARUS 26	LA	4144			
SUI00032	APPENZELL 27	LD	4145			
SUI00033	SG RHEINTAL 28	LB	4146			
SUI00034	GRAUBUENDEN 29	LI	4147			
SUI00035	ENGADIN 30	LA	4148			
SUI00036	SOPRACENERI 31	LA	4149			
SUI00037	MESOCOCCO 32	LB	4150			
SUI00038	SOTTOCENERI 33	LI	4151			
SVK00021	SVK_DAB_2 PRIORITY	LG	4903		*	AUT HNG
SVN00167	VZHOD	LG	0320			
SVN00168	ZAHOD	LA	0321 2899			

T-DAB Identifier	Name	Block Identifier	Agreement number	Co-ordination required before the implementation of T-DAB requirements		Remarks
				1	2	
SVN00169	VZHOD	LH				
SVN00170	ZAHOD	LF				
SVN00171	VZHOD 2	LD				
SVN00172	ZAHOD	LC				
SVN00173	VZHOD 3	LI				
SVN00174	ZAHOD 2	LE				
TUR70007	REGION-1	LA	4412 4164	*	*	GRC
TUR70008	REGION-2	LB	4413 4165		*	GRC
TUR70009	REGION-3	LB	4414 4166		*	GRC
TUR70010	REGION-4	LC				
TUR70011	REGION-5	LD		*		
TUR70012	REGION-6	LB		*		
UKR00001	UKRVL	LD		*		
UKR00002	UKRLV	LC				
UKR00003	UKRRV	LA		*		
UKR00004	UKRUG	LG				
UKR00005	UKRIF	LH				
UKR00006	UKRCH	LA				
UKR00007	UKRTE	LB				
UKR00008	UKRGM	LB		*		
UKR00009	UKRXM	LG		*		
UKR00010	UKRVN	LD		*		
UKR00011	UKROD	LG				
UKR00012	UKRKV	LA		*		
UKR00013	UKRCK	LC		*		
UKR00014	UKRCN	LB		*		
UKR00015	UKRPT	LD		*		
UKR00016	UKRSM	LC		*		
UKR00017	UKRKG	LA		*		
UKR00018	UKRKN	LB		*		
UKR00019	UKRXN	LD		*		

[illegible]

[illegible]

[illegible]

[illegible]

T-DAB identifier	NAME	Block identifier	Type of the reference network	Agreement numbers	Co-ordination required before the implementation of T-DAB requirements									Remarks
					1	2	3	4	5	6	7	8	9	
D__30032	NRW 15	LL	2											
D__30033	SACHSEN-ANHALT 1	LH	2											
D__30034	SACHSEN-ANHALT 2	LJ	2											
D__30035	SACHSEN-ANHALT 3	LO	2				*							
D__30036	SACHSEN-ANHALT 4	LL	2											
D__30037	SACHSEN-ANHALT 5	LN	2	0038			*							
D__30038	SACHSEN-ANHALT 6	LK	2											
D__30039	KASSEL	LM	3				*							
D__30040	FULDA	LM	3				*							
D__30041	WETZLAR GIESSEN MARB	LJ	2											
D__30042	WIESBADEN	LO	3				*							
D__30043	FRANKFURT A. M.	LN	2				*							
D__30044	DARMSTADT	LJ	3											
D__30045	TH NORD	LJ	2											
D__30046	TH WEST	LL	2											
D__30047	TH MITTE	LO	2				*							
D__30048	TH OST	LH	2											
D__30049	TH SUED	LK	2											
D__30050	CHEMNITZ	LL	1											
D__30051	LEIPZIG	LJ	2											
D__30052	DRESDEN	LK	1											
D__30053	LAUSITZ	LN	1	0045			*							
D__30054	TRIER	LO	1				*							
D__30055	KOBLENZ	LK	2											
D__30056	MAINZ	LL	2											
D__30057	WESTPFALZ	LN	2				*							
D__30058	RHEINPFALZ	LO	2				*							
D__30059	SAARLAND	LJ	2											
D__30060	MANNHEIM	LK	2											
D__30061	FRANKEN	LF	2											
D__30062	KARLSRUHE	LM	2				*							

T-DAB identifier	NAME	Block identifier	Type of the reference network	Agreement numbers	Co-ordination required before the implementation of T-DAB requirements									Remarks
					1	2	3	4	5	6	7	8	9	
D__30063	UMLAND STUTTGART	LN	2				*							
D__30064	STUTTGART	LO	2				*							
D__30065	OST-WUERTTEMBERG	LM	2				*							
D__30066	BADEN-BADEN	LL	2											
D__30067	NECKAR-ALB	LH	2											
D__30068	BIBERACH	LK	2											
D__30069	ULM	LB	3											
D__30070	OFFENBURG	LD	2	0516										
D__30071	FREIBURG	LM	2				*							
D__30072	OBERSCHWABEN	LN	2				*							
D__30073	HOCHRHEIN	LK	2											
D__30074	SCHWARZWALD-BAAR-HEU	LJ	2											
D__30075	KONSTANZ	LO	2				*							
D__30076	BODENSEE	LH	2											
D__30077	BY1	LL	2											
D__30078	BY2	LO	2				*							
D__30079	BY3	LN	2				*							
D__30080	BY4	LM	2				*							
D__30081	BY5.1	LI	2											
D__30082	BY5.2	LO	2				*							
D__30083	BY6	LN	1				*							
D__30084	BY7	LJ	2											
D__30085	BY8	LI	2											
D__30086	BY9	LO	2				*							
D__30087	BY10	LL	2											
D__30088	BY11	LK	1											
D__30089	BY12	LL	1											
D__30090	BY13	LE	2											
D__30091	BY14	LC	2											
D__30092	BY15	LL	2											
D__30093	BY16	LM	2				*							

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

T-DAB identifier	NAME	Block identifier	Type of the reference network	Agreement numbers	Co-ordination required before the implementation of T-DAB requirements									Remarks
					1	2	3	4	5	6	7	8	9	
FIN40008	KYMENLAAKSO2	LK	1		*									
FIN40009	ETELA-KARJALA2	LD	1		*									
FIN40010	ETELA-SAVO2	LG	1		*									
FIN40011	POHJOIS-SAVO2	LP	1		*									
FIN40012	POHJOIS-KARJALA2	LK	1		*									
FIN40013	KESKI-SUOMI2	LD	1		*									
FIN40014	ETELA-POHJANMAA2	LA	1											
FIN40015	VAASA2	LC	1											
FIN40016	KESKI-POHJANMAA2	LB	1											
FIN40017	POHJOIS-POHJANMAA2	LN	1		*									
FIN40018	KAINUU2	LG	1		*									
FIN40019	LAPPI4	LE	1		*									
FIN40020	ITA-UUSIMAA2	LJ	1		*									
FIN40023	HELSINKI2	LL	1		*									
F__03301	FRANCE-301	LG	2	0194 0204 0367								*		
F__03302	FRANCE-302	LJ	1	0072								*		
F__03303	FRANCE-303	LL	2									*		
F__03304	FRANCE-304	LK	1									*		
F__03305	FRANCE-305	LO	1											
F__03306	FRANCE-306	LM	1	0073										
F__03307	FRANCE-307	LG	1											
F__03308	FRANCE-308	LJ	1											
F__03309	FRANCE-309	LO	2											
F__03310	FRANCE-310	LM	2				*							
F__03311	FRANCE-311	LK	1											
F__03312	FRANCE-312	LL	2											
F__03313	FRANCE-313	LM	1				*							
F__03314	FRANCE-314	LK	3											
F__03315	FRANCE-315	LJ	2											
F__03316	FRANCE-316	LO	1	0331										
F__03317	FRANCE-317	LN	2				*							

[illegible]

T-DAB identifier	NAME	Block identifier	Type of the reference network	Agreement numbers	Co-ordination required before the implementation of T-DAB requirements									Remarks
					1	2	3	4	5	6	7	8	9	
F__03350	FRANCE-350	LM	2	0066 0067 0068 0372								*		
F__03352	FRANCE-352	LN	1											
F__03353	FRANCE-353	LO	1											
F__03354	FRANCE-354	LK	1											
F__03355	FRANCE-355	LM	1											
F__03356	FRANCE-356	LK	1											
F__03359	FRANCE-359	LM	1											
F__03360	FRANCE-360	LO	1											
F__03361	FRANCE-361	LH	1											
F__03362	FRANCE-362	LL	1											
F__03364	FRANCE-364	LK	1									*		
F__03365	FRANCE-365	LL	2	0056 0064										
F__03366	FRANCE-366	LN	2	0050 0052 0365 0366										
F__03367	FRANCE-367	LK	2	0051										
F__03368	FRANCE-368	LF	2	0054										
F__03458	FRANCE-458	LJ	1											
F__03463	FRANCE-463	LJ	1											
F__03539	FRANCE-539	LM	1											
F__03557	FRANCE-557	LM	1											
GRC30001	ACHAIA	LA	1											
GRC30002	ARGOLIDA	LM	1								*		*	
GRC30003	ARKADIA	LL	1	0077										
GRC30004	ARTA	LH	1											
GRC30005	ATHOS	LN	3								*		*	
GRC30006	ATTIKI LOC	LJ	1	0084										
GRC30007	CHALKIDIKI	LP	1	0075							*		*	
GRC30008	CHANIA	LF	1	0086										
GRC30009	CHIOS	LP	1	0075 0076							*		*	
GRC30010	CYCLADES1	LD	1											
GRC30011	CYCLADES2	LL	1	0077 0078 0079 0080							*			
GRC30012	DWD1R	LK	3								*			

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

T-DAB identifier	NAME	Block identifier	Type of the reference network	Agreement numbers	Co-ordination required before the implementation of T-DAB requirements									Remarks
					1	2	3	4	5	6	7	8	9	
G__00263	WALSALL & CANNOCK	LD	3	0159 0174								*		
G__00264	WOLVERHAMPTON	LK	3	0142 0175								*		
G__00265	NORTH STAFFORDSHIRE	LE	2	0148 0176 0177 0178								*		
G__00266	STOKE	LG	2									*		
G__00267	STAFFORD	LC	2	0158								*		
G__00268	TELFORD	LA	2											
G__00269	BRIDGNORTH	LE	2	0177 0178								*		
G__00270	SHREWSBURY	LM	1	0167 0179								*		
G__00271	WELSHPOOL	LD	1	0180 0220								*		
G__00272	PORT TALBOT & NEATH	LD	2									*		
G__00273	SWANSEA	LE	2	0126 0135								*		
G__00274	CARMARTHENSHIRE	LB	1									*		
G__00275	CEREDIGION	LI	1									*		
G__00276	GIBRALTAR	LC	3											
HNG30015	HNG_BARANYA	LG	1											
HNG30016	HNG_BACS_KISKUN	LJ	1			*			*					
HNG30017	HNG_BEKES	LG	1											
HNG30018	HNG_BORSOD	LD	1											
HNG30019	HNG_CSONGRAD	LP	1			*								
HNG30020	HNG_FEJER	LN	1			*			*					
HNG30021	HNG_GYOR	LO	1			*								
HNG30022	HNG_HAJDU	LA	1											
HNG30023	HNG_HEVES	LG	1											
HNG30024	HNG_KOMAROM	LH	1											
HNG30025	HNG_NOGRAD	LP	1			*								
HNG30026	HNG_PEST	LM	1	0181 0182		*			*					
HNG30027	HNG_SOMOGY	LI	1						*					
HNG30028	HNG_SZABOLCS	LN	1			*			*					
HNG30029	HNG_SZOLNOK	LK	1			*			*					
HNG30030	HNG_TOLNA	LO	1			*								
HNG30031	HNG_VAS	LJ	1						*					

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

T-DAB identifier	NAME	Block identifier	Type of the reference network	Agreement numbers	Co-ordination required before the implementation of T-DAB requirements									Remarks
					1	2	3	4	5	6	7	8	9	
I_16012	BARI_2	LA	3											
I_16021	BRINDISI_1	LA	3	0264 0271									*	The administration of Greece shall notify to the administration of Italy any cessation of any of its other services (F3).
I_16031	FOGGIA_1	LF	3											
I_16032	FOGGIA_2	LK	3											
I_16033	FOGGIA_3	LJ	3	0265										
I_16041	LECCE_1	LG	3										*	The administration of Greece shall notify to the administration of Italy any cessation of any of its other services (F3).
I_16042	LECCE_2	LN	3										*	The administration of Greece shall notify to the administration of Italy any cessation of any of its other services (F3).
I_16051	TARANTO_1	LJ	3											
I_16052	TARANTO_2	LG	3										*	The administration of Greece shall notify to the administration of Italy any cessation of any of its other services (F3).
I_17011	POTENZA_1	LG	3											
I_17012	POTENZA_2	LE	3	0266 0269										
I_17021	MATERA_1	LD	3										*	The administration of Greece shall notify to the administration of Italy any cessation of any of its other services (F3).
I_18011	REGGIOCALABRIA_1	LL	3											
I_18012	REGGIOCALABRIA_2	LE	3										*	The administration of Greece shall notify to the administration of Italy any cessation of any of its other services (F3).
I_18021	CATANZARO_1	LG	3	0254 0267 0268 0282									*	The administration of Greece shall notify to the administration of Italy any cessation of any of its other services (F3).
I_18031	COSENZA_1	LE	3	0266 0269									*	The administration of Greece shall notify to the administration of Italy any cessation of any of its other services (F3).

[illegible]

T-DAB identifier	NAME	Block identifier	Type of the reference network	Agreement numbers	Co-ordination required before the implementation of T-DAB requirements									Remarks
					1	2	3	4	5	6	7	8	9	
I_19093	TRAPANI_3	LM	3											
I_19094	TRAPANI_4	LK	3											
I_20011	CAGLIARI_1	LD	3											
I_20012	CAGLIARI_2	LA	3											
I_20021	NUORO_1	LF	3											
I_20022	NUORO_2	LG	3	0256 0283 0285 0286										
I_20031	ORISTANO_1	LN	3											
I_20041	SASSARI_1	LM	3	0238 0287										
I_20042	SASSARI_2	LN	3	0245 0288										
LIE00003	LIECHTENSTEIN	LL	2											
LTU30001	VILNIUS	LG	1		*									
LTU30002	KAUNAS	LJ	1		*	*								
LTU30003	KLAIPEDA	LD	1		*									
LTU30004	SIAULIAI	LL	1		*									
LTU30005	PANEVEZYS	LN	1		*									
LTU30006	AKMENE	LD	2		*									
LTU30007	ALYTUS	LK	1		*	*								
LTU30008	ANYKSCIAI	LL	1		*									
LTU30009	BIRZAI	LD	2		*									
LTU30010	DRUSKININKAI	LA	1		*									
LTU30011	ELEKTRENAI	LN	2		*	*								
LTU30012	JONAVA	LA	2		*									
LTU30013	JONISKIS	LA	2		*									
LTU30014	JURBARKAS	LP	2		*									
LTU30015	KEDAINIAI	LG	2		*									
LTU30016	KELME	LN	2		*									
LTU30017	KYBARTAI	LA	2		*									
LTU30018	LAZDIJAI	LG	1		*									
LTU30019	MARIJAMPOLE	LO	2		*	*								
LTU30020	MAZEIKIAI	LP	2		*									
LTU30021	MOLETAI	LP	1		*	*								

[illegible]

[illegible]

[illegible]

[illegible]

T-DAB identifier	NAME	Block identifier	Type of the reference network	Agreement numbers	Co-ordination required before the implementation of T-DAB requirements									Remarks
					1	2	3	4	5	6	7	8	9	
NOR00078	LOFOTEN	LK	1											
NOR00079	VESTERAALEN	LD	1	0320 0321 0322 0324										
NOR00080	HARSTAD	LG	1	0323 0357										
NOR00081	INDRE_TROMS	LP	1											
NOR00082	TROMSOE	LA	1											
NOR00083	NORD_TROMS	LK	1											
NOR00084	ALTA	LN	1											
NOR00085	FINNMARKSVIDDA	LA	1		*									
NOR00086	PORSANGER	LG	1		*									
NOR00087	HAMMERFEST	LD	1	0322 0324	*									
NOR00088	NORDKAPP	LE	1		*									
NOR00089	NORDKINNHALVOEYA	LP	1		*									
NOR00090	VARANGERHALVOEYA	LK	1		*									
NOR00091	VADSOE	LD	1		*									
NOR00092	SOER_VARANGER	LG	1		*									
POL30001	WROCLAW	LO	1				*							
POL30002	BYDGOSZCZ	LJ	1		*	*								
POL30003	LUBLIN	LN	1			*								
POL30004	ZIELONA GORA	LI	1											
POL30005	LODZ	LA	1											
POL30006	KRAKOW	LL	1			*								
POL30007	WARSZAWA	LO	1		*	*								
POL30008	OPOLE	LN	1			*								
POL30009	BIALYSTOK	LP	1		*	*								
POL30010	GDANSK	LA	1		*									
POL30011	KATOWICE	LJ	1			*			*					
POL30012	KIELCE	LP	1			*								
POL30013	OLSZTYN	LN	1	0325 0353	*	*								
POL30014	POZNAN	LP	1		*	*								
POL30015	RZESZOW	LK	1			*			*					
POL30016	SZCZECIN	LN	1	0034 0326 0354	*		*							

[illegible]

T-DAB identifier	NAME	Block identifier	Type of the reference network	Agreement numbers	Co-ordination required before the implementation of T-DAB requirements									Remarks
					1	2	3	4	5	6	7	8	9	
POR30332	A5R ANAD VNP ARGANIL	LG	1											
POR30333	A6R MURT AVEIRO I VA	LN	3											
POR30334	A6R OVAR OLIAZ SJMAD	LE	3											
POR30335	A6R E VC SV AGUEDA O	LA	1											
POR30336	A6R M SC TABUA OH CS	LJ	1											
POR30337	A5R TONDEL SPS CD VP	LB	1											
POR30338	A6R SA PC MANG VISEU	LK	1											
POR30339	A6R S M G GUARDA SAB	LE	1											
POR30340	A5R F TRANCOSO M P A	LA	1											
POR30341	A6R AROU CP R LAMEGO	LF	1											
POR30342	A5R ARMAM MB TABUACO	LM	1											
POR30343	A5R MIRANDEL TM MOGA	LJ	1											
POR30344	A6R BRAGANCA MIRDOUR	LO	1											
POR30345	A6R VPA VILREAL ALIJ	LG	1											
POR30346	A6R MONT CHAVES VALP	LK	1											
POR30347	A6R VALENC MONCAO PB	LJ	1											
POR30348	A6R CAM PL VIANACAST	LE	1											
POR30349	A6R VV AMAR PL BRAGA	LO	1											
POR30350	A5R VM CB F GUIMARAE	LA	1											
POR30351	A5R ESP BARCELOS VNF	LL	1											
POR30352	A5R CB F AMARANTE MC	LH	1											
POR30353	A6R PF PEN PAREDE VL	LP	1											
POR30354	A6R PVARZIM VCOND ST	LB	3											
POR30355	A4R MAIA MATOSINHOS	LG	3											
POR30356	A7R PORTO GANDOMAR	LI	3											
POR30357	A7R GAIA ESPIN FEIRA	LO	3											
POR30358	MDR A4R MACH SANT PS	LN	1											
POR30359	MDR A5R RBRAV CALHET	LK	3											
POR30360	MDR A5R FUNCHAL CLOB	LA	3											
ROU30011	DAB ZONA11	LL	1			*								
ROU30012	DAB ZONA12	LK	1			*			*					

T-DAB identifier	NAME	Block identifier	Type of the reference network	Agreement numbers	Co-ordination required before the implementation of T-DAB requirements									Remarks
					1	2	3	4	5	6	7	8	9	
ROU30013	DAB ZONA13	LE	1											
ROU30014	DAB ZONA14	LK	1			*								
ROU30015	DAB ZONA15	LJ	1			*								
ROU30021	DAB ZONA21	LE	1											
ROU30022	DAB ZONA22	LP	1			*								
ROU30023	DAB ZONA23	LG	1											
ROU30024	DAB ZONA24	LN	1			*								
ROU30025	DAB ZONA25	LG	1											
ROU30031	DAB ZONA31	LD	1											
ROU30032	DAB ZONA32	LL	1			*					*			
ROU30033	DAB ZONA33	LC	1										*	
ROU30034	DAB ZONA34	LK	1			*					*			
ROU30035	DAB ZONA35	LA	1											
ROU30041	DAB ZONA41	LA	1											
ROU30042	DAB ZONA42	LP	1			*								
ROU30043	DAB ZONA43	LN	1	0508		*								
ROU30044	DAB ZONA44	LD	1	0509										
ROU30045	DAB ZONA45	LM	1			*								
ROU30051	DAB ZONA51	LO	1			*								
ROU30052	DAB ZONA52	LM	1			*								
ROU30053	DAB ZONA53	LO	1			*								
ROU30054	DAB ZONA54	LK	1			*								
ROU30055	DAB ZONA55	LP	1											
ROU30061	DAB ZONA61	LK	1			*			*					
ROU30062	DAB ZONA62	LG	1											
ROU30071	DAB ZONA71	LM	1			*			*					
ROU30072	DAB ZONA72	LO	1			*								
ROU30073	DAB ZONA73	LP	1			*								
ROU30081	DAB ZONA81	LP	1			*								
ROU30082	DAB ZONA82	LA	1											
ROU30083	DAB ZONA83	LK	1			*			*					

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

T-DAB identifier	NAME	Block identifier	Type of the reference network	Agreement numbers	Co-ordination required before the implementation of T-DAB requirements									Remarks
					1	2	3	4	5	6	7	8	9	
UKR30067	UKRODS_2	LK	1			*								
UKR30068	UKRODS_3	LM	1			*								
UKR30069	UKRPOL_1	LM	1		*	*								
UKR30070	UKRPOL_2	LP	1		*	*								
UKR30071	UKRPOL_3	LE	1		*									
UKR30072	UKRROV_1	LK	1			*								
UKR30073	UKRROV_2	LM	1			*								
UKR30074	UKRSUM_1	LG	1		*									
UKR30075	UKRSUM_2	LK	1		*	*								
UKR30076	UKRTER_1	LE	1											
UKR30077	UKRVIN_1	LE	1											
UKR30078	UKRVIN_2	LJ	1			*								
UKR30079	UKRVOL_1	LP	1			*								
UKR30080	UKRVOL_2	LG	1											
UKR30081	UKRZAK_1	LO	1			*								
UKR30082	UKRZAK_2	LJ	1			*			*					
UKR30083	UKRZAP_1	LK	1		*	*								
UKR30084	UKRZAP_2	LP	1		*	*								
UKR30085	UKRZHI_1	LG	1		*									
UKR30086	UKRZHI_2	LD	1											
UKR30087	UKRZHI_3	LL	1			*								

Appendix to Annex 1, Part 2

Change of identification numbers

For administrative reasons, the identification numbers proposed by administrations and given in column 1 have been changed by the Plan Management Body to the new identification numbers given in column 2.

Original number	New number		Original number	New number		Original number	New number
BUL10001	BUL30001		S_00034	S_30034		UKR00030	UKR30030
BUL10002	BUL30002		S_00035	S_30035		UKR00031	UKR30031
BUL10003	BUL30003		S_00036	S_30036		UKR00032	UKR30032
BUL10004	BUL30004		S_00037	S_30037		UKR00033	UKR30033
BUL10005	BUL30005		S_00038	S_30038		UKR00034	UKR30034
BUL10006	BUL30006		S_00039	S_30039		UKR00035	UKR30035
BUL10007	BUL30007		S_00040	S_30040		UKR00036	UKR30036
BUL10008	BUL30008		S_00041	S_30041		UKR00037	UKR30037
BUL10009	BUL30009		S_00042	S_30042		UKR00038	UKR30038
BUL10010	BUL30010		S_00043	S_30043		UKR00039	UKR30039
BUL10011	BUL30011		S_00044	S_30044		UKR00040	UKR30040
BUL10012	BUL30012		S_00045	S_30045		UKR00041	UKR30041
BUL10013	BUL30013		S_00046	S_30046		UKR00042	UKR30042
BUL10014	BUL30014		S_00047	S_30047		UKR00043	UKR30043
CVA1	CVA30001		S_00048	S_30048		UKR00044	UKR30044
LUX00001	LUX30001		S_00049	S_30049		UKR00045	UKR30045
MLT00017	MLT30017		S_00050	S_30050		UKR00046	UKR30046
SMR00002	SMR30002		S_00051	S_30051		UKR00047	UKR30047
SVK0301	SVK30301		S_00052	S_30052		UKR00048	UKR30048
SVK0302	SVK30302		S_00053	S_30053		UKR00049	UKR30049
SVK0303	SVK30303		S_00054	S_30054		UKR00050	UKR30050
SVK0304	SVK30304		S_00055	S_30055		UKR00051	UKR30051
SVK0305	SVK30305		S_00056	S_30056		UKR00052	UKR30052
SVK0306	SVK30306		S_00057	S_30057		UKR00053	UKR30053
SVK0307	SVK30307		S_00058	S_30058		UKR00054	UKR30054
SVK0308	SVK30308		S_00059	S_30059		UKR00055	UKR30055
SVK0309	SVK30309		S_00060	S_30060		UKR00056	UKR30056
S_00001	S_30001		S_00061	S_30061		UKR00057	UKR30057
S_00002	S_30002		S_00062	S_30062		UKR00058	UKR30058
S_00003	S_30003		S_00063	S_30063		UKR00059	UKR30059
S_00004	S_30004		S_00064	S_30064		UKR00060	UKR30060
S_00005	S_30005		S_00065	S_30065		UKR00061	UKR30061
S_00006	S_30006		S_00066	S_30066		UKR00062	UKR30062
S_00007	S_30007		S_00067	S_30067		UKR00063	UKR30063
S_00008	S_30008		S_00068	S_30068		UKR00064	UKR30064
S_00009	S_30009		S_00069	S_30069		UKR00065	UKR30065
S_00010	S_30010		S_00070	S_30070		UKR00066	UKR30066
S_00011	S_30011		S_00071	S_30071		UKR00067	UKR30067
S_00012	S_30012		S_00072	S_30072		UKR00068	UKR30068
S_00013	S_30013		S_00073	S_30073		UKR00069	UKR30069
S_00014	S_30014		S_00074	S_30074		UKR00070	UKR30070
S_00015	S_30015		S_00075	S_30075		UKR00071	UKR30071
S_00016	S_30016		S_00076	S_30076		UKR00072	UKR30072
S_00017	S_30017		S_00077	S_30077		UKR00073	UKR30073
S_00018	S_30018		S_00078	S_30078		UKR00074	UKR30074
S_00019	S_30019		S_00079	S_30079		UKR00075	UKR30075
S_00020	S_30020		S_00080	S_30080		UKR00076	UKR30076
S_00021	S_30021		S_00081	S_30081		UKR00077	UKR30077
S_00022	S_30022		S_00082	S_30082		UKR00078	UKR30078
S_00023	S_30023		S_00083	S_30083		UKR00079	UKR30079
S_00024	S_30024		S_00084	S_30084		UKR00080	UKR30080
S_00025	S_30025		S_00085	S_30085		UKR00081	UKR30081
S_00026	S_30026		S_00086	S_30086		UKR00082	UKR30082
S_00027	S_30027		S_00087	S_30087		UKR00083	UKR30083
S_00028	S_30028		S_00088	S_30088		UKR00084	UKR30084
S_00029	S_30029		S_00089	S_30089		UKR00085	UKR30085
S_00030	S_30030		S_00090	S_30090		UKR00086	UKR30086
S_00031	S_30031		S_00091	S_30091		UKR00087	UKR30087
S_00032	S_30032		S_00092	S_30092			
S_00033	S_30033		S_00093	S_30093			

ANNEX 2

Technical Bases for T-DAB Planning

1. INTRODUCTION

2. FIELD STRENGTH CONSIDERATIONS

- 2.1 General
- 2.2 General field strength prediction
 - 2.2.1 Location percentage requirements and associated correction
 - 2.2.2 Receiving antenna height gain correction
 - 2.2.3 Minimum wanted field strength used for planning
- 2.3 Out-of-band emissions

3. POSITION OF FREQUENCY BLOCKS

4. SHARING AND COMPATIBILITY

- 4.1 Intra-service (T-DAB interfered with by T-DAB)
 - 4.1.1 Maximum permissible interfering field strength, co-block
 - 4.1.2 Maximum permissible interfering field strength, adjacent-block
- 4.2 Inter-service (T-DAB versus other services)
 - 4.2.1 T-DAB interfered with by other services
 - 4.2.2 Other services interfered with by T-DAB

5. T-DAB REFERENCE NETWORKS

- 5.1 Definitions
- 5.2 T-DAB transmitter network structures
- 5.3 Reference single frequency networks
 - 5.3.1 Reference network for T-DAB planning
 - 5.3.2 Types of Reference networks
 - 5.3.2.1 Reference Network One - Seven transmitter "open" network
 - 5.3.2.2 Reference Network Two - Seven transmitter "closed" network
 - 5.3.2.3 Reference Network Three - Four transmitter "closed" network
 - 5.3.3 Derivation of separation distances
 - 5.3.4 Nominal transmitter location for the calculation of potential T-DAB interference to the aeronautical mobile service

APPENDIX PROPAGATION CURVES FOR THE 1.5 GHz BAND

1. INTRODUCTION

This Annex contains information relevant to the establishment of the CEPT T-DAB Plan in the 1.5 GHz frequency band.

Relevant T-DAB system parameters and network concepts, including a description of single frequency networks (SFN), are contained in the following documents:

- European Standard EN 300 401 "Radio broadcasting systems; Digital Audio Broadcasting (DAB) to mobile, portable and fixed receivers", (ETSI);
- Document EBU BPN003 Rev.1 "Technical Bases for T-DAB Services Network Planning and Compatibility with existing Broadcasting Services" (Geneva, May 1998);
- Recommendation ITU-R BS.774-2 and Recommendation ITU-R BS.1114-1.

2. FIELD STRENGTH CONSIDERATIONS

2.1 General

The minimum equivalent field strength is given for 1470 MHz for different conditions.

The calculations used for this assume that the receiving antenna, which is believed to be representative for mobile and portable reception, is at a height of 1.5 metres above ground level, omni-directional, and has a gain slightly lower than that of a dipole.

2.2 General field strength prediction¹

Field strength predictions assume a receiving antenna height of 10 m above ground level and are obtained as follows:

- For a land path, curves for 1.5 GHz band are given in the Appendix to this Annex
- For a sea path, 1.5 GHz curves are given in the Appendix to this Annex. In all-sea path calculations it is assumed that the network and its coverage area are on land and that the sea starts from the edge of the coverage area
- For mixed paths the field strength is calculated according to Section 4 of the Appendix to this Annex

¹ The field strength prediction methods and propagation models used in this Annex have their origin in the former Recommendation ITU-R P.370-7, which was in force in 1995, when the Wiesbaden, 1995, Special Arrangement was agreed. Relevant information taken from the former Recommendation ITU-R P.370-7 can be found in the Appendix to this Annex.

2.2.1 Location percentage requirements and associated correction

The required location percentage for T-DAB services is 99%. Therefore, taking into account an estimated standard deviation of 5.5 dB for a location variation of T-DAB signal, an increase of 13 dB (2.33×5.5 dB) shall be applied to the field strength values (50% locations) as given in the Appendix to this Annex to obtain the 99% location values required for planning a T-DAB service.

2.2.2 Receiving antenna height gain correction

The propagation curves used relate to a receiving antenna height of 10 metres above ground, whereas a T-DAB service will be planned primarily for mobile reception, i.e. with an effective receiving antenna height of about 1.5 metres. An allowance of 10 dB is necessary to convert the minimum required T-DAB field strength at a vehicle antenna height of 1.5 metres to the equivalent value at 10 metres.

2.2.3 Minimum wanted field strength used for planning

Table 1 contains the value for the 1.5 GHz band, with the inclusion of a correction of 13 dB for location percentage and of 10 dB for height gain.

Frequency band	1.5 GHz
Minimum equivalent field strength (dB(μ V/m))	46
Location percentage correction factor (50% to 99%) (dB)	+13
Antenna height gain correction (dB)	+10
Minimum median field strength for planning (dB(μ V/m))	69

Table 1: Determination of minimum median field strength (dB(μ V/m)) at an antenna height of 10 metres

2.3 Out-of-band emissions

The out-of-band radiated signal in any 4 kHz band shall be constrained by the mask defined in Figure 1.

3. POSITION OF FREQUENCY BLOCKS

Table 2 shows the adopted harmonised channelling plan within the band 1452 – 1479.5 MHz. This is based on tuning increments of 16 kHz and guard bands of 176 kHz between adjacent T-DAB frequency blocks. In arriving at these values, it has been assumed that the T-DAB transmitting and receiving equipment must allow for the use of adjacent T-DAB frequency blocks in adjacent areas, i.e. using a 176 kHz guard band.

T-DAB block number	Centre frequency (MHz)	Frequency range (MHz)
LA	1452.960	1452.192 – 1453.728
LB	1454.672	1453.904 – 1455.440
LC	1456.384	1455.616 – 1457.152
LD	1458.096	1457.328 – 1458.864
LE	1459.808	1459.040 – 1460.576
LF	1461.520	1460.752 – 1462.288
LG	1463.232	1462.464 – 1464.000
LH	1464.944	1464.176 – 1465.712
LI	1466.656	1465.888 – 1467.424
LJ	1468.368	1467.600 – 1469.136
LK	1470.080	1469.312 – 1470.848
LL	1471.792	1471.024 – 1472.560
LM	1473.504	1472.736 – 1474.272
LN	1475.216	1474.448 – 1475.984
LO	1476.928	1476.160 – 1477.696
LP	1478.640	1477.872 – 1479.408

Table 2: T-DAB frequency blocks

4. SHARING AND COMPATIBILITY

4.1 Intra-service (T-DAB interfered with by T-DAB)

4.1.1 Maximum permissible interfering field strength, co-block

The T-DAB co-block protection ratio is 10 dB.

As defined in Section 2.2.1, the standard deviation of the location variation of a T-DAB signal is 5.5 dB. The field strength values for wanted and unwanted signals are assumed to be uncorrelated. To protect wanted T-DAB signals for 99% of locations against interference from another T-DAB transmitter, a propagation correction of $2.33 \times 5.5 \times \sqrt{2} = 18$ dB as well as the T-DAB co-block protection ratio (T-DAB to T-DAB) of 10 dB shall be taken into account.

The maximum permissible equivalent field strength for co-block interference at the contour of an allotment area can be calculated:

• Minimum median equivalent field strength:	69 dB μ V/m
• Co-block protection ratio:	10 dB
• Propagation correction:	18 dB

which leads to:

- a maximum permissible interfering equivalent field strength of:
 $(69 - 10 - 18) = 41$ dB(μ V/m)

Note: In the case of Reference Network 2 and Reference Network 3 this value should be increased by 2 and 4 dB respectively.

4.1.2 Maximum permissible interfering field strength, adjacent-block

The T-DAB adjacent block protection ratio is -30 dB.

As defined in Section 2.2.1, the standard deviation of the location variation of a T-DAB signal is 5.5 dB. The field strength values for wanted and unwanted signals are assumed to be uncorrelated. To protect wanted T-DAB signals for 99% of locations against interference from another T-DAB transmitter, a propagation correction of $2.33 \times 5.5 \times \sqrt{2} = 18$ dB as well as the T-DAB adjacent-block protection ratio (T-DAB to T-DAB) of -30 dB shall be taken into account.

The maximum permissible equivalent field strength for adjacent block interference at the contour of an allotment area can be calculated:

• Minimum median equivalent field strength:	69 dB(μ V/m)
• Adjacent block protection ratio:	-30 dB
• Propagation correction:	18 dB

which leads to:

- a maximum permissible interfering equivalent field strength of:
 $(69 - (-30) - 18) = 81$ dB(μ V/m)

Note: In the case of Reference Network 2 and Reference Network 3 this value should be increased by 2 and 4 dB respectively.

4.2 Inter-service (T-DAB versus other services)

4.2.1 T-DAB interfered with by other services

The maximum allowable field strength of an interfering signal (FS_i) to protect the minimum wanted field strength of a T-DAB signal (FS_{T-DAB}) is calculated as follows:

$$\text{Maximum allowable } FS_i = (FS_{T-DAB} - PR - 18) \text{ dB}(\mu\text{V/m}).$$

The following tables contain the protection ratio values used in the calculations.
The service information is shown as follows, for example:

Russian aeronautical telemetry at 1.5 GHz, no information, XR data used		
Service identifier	Field strength to be protected in dB(μ V/m)	Transmit antenna height (m)
XR	69.0	10000

where

- **XR** is the service identifier;
- **69.0** is the T-DAB field strength to be protected;
- **10000** is the other service transmit antenna height in metres.

The columns in the table relating to the above example have the following meaning:

Δf (MHz)	-0.9	-0.8	-0.6	-0.4	-0.2	0.0	0.2	0.4	0.6	0.8	0.9
PR (dB)	-66.0	-6.6	2.7	3.2	4.1	6.5	4.1	3.2	2.7	-6.6	-66.0

where

- **-0.9** is the frequency difference in MHz, i.e. centre frequency of the interfering other service minus the centre frequency of the T-DAB block suffering interference;
- **-66.0** is the required protection ratio in dB.

Civil fixed links, digital (1.5 GHz)		
Service identifier	Field strength to be protected in dB(μ V/m)	Transmit antenna height (m)
FA	69.0	10.0

Δf (MHz)	-2.768	-2.268	-1.768	-1.518	-1.268	-0.768	0.000	0.768	1.268	1.518	1.768
PR (dB)	-57.0	-55.0	-51.0	-46.0	-31.0	-1.0	4.0	-1.0	-30.0	-46.0	-50.0
Δf (MHz)	2.268	2.768									
PR (dB)	-56.0	-60.0									

1.5 GHz digital point-to-multipoint telephone system (IRT 1500)		
Service identifier	Field strength to be protected in dB(μ V/m)	Transmit antenna height (m)
FB	69.0	10.0

Δf (MHz)	-3.2	-3.1	-3.0	-2.9	-2.8	-2.7	-2.6	-2.5	-2.4	-2.3	-2.2
PR (dB)	-43.0	-42.2	-42.0	-41.8	-41.5	-40.5	-37.8	-35.0	-32.0	-30.0	-27.0
Δf (MHz)	-2.1	-2.0	-1.9	-1.8	-1.7	-1.6	-1.5	-1.4	-1.3	-1.2	-1.1
PR (dB)	-26.8	-26.2	-26.0	-26.0	-24.0	-20.0	-16.0	-11.5	-7.5	-5.8	-2.8
Δf (MHz)	-1.0	-0.9	-0.8	-0.7	-0.6	-0.5	-0.4	-0.3	-0.2	0.0	0.2
PR (dB)	-1.0	1.3	2.0	3.0	4.0	4.0	4.2	4.2	5.0	5.0	5.0
Δf (MHz)	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0	1.1	1.2	1.3
PR (dB)	4.2	4.2	4.0	4.0	3.0	2.0	1.3	-1.0	-2.8	-5.8	-7.5
Δf (MHz)	1.4	1.5	1.6	1.7	1.8	1.9	2.0	2.1	2.2	2.3	2.4
PR (dB)	-11.5	-16.0	-20.0	-24.0	-26.0	-26.0	-26.2	-26.8	-27.0	-30.0	-32.0
Δf (MHz)	2.5	2.6	2.7	2.8	2.9	3.0	3.1	3.2			
PR (dB)	-35.0	-37.8	-40.5	-41.5	-41.8	-42.0	-42.2	-43.0			

Civil fixed links, analogue (1.5 GHz). No information, CW interference data used											
Service identifier	Field strength to be protected in dB(μV/m)							Transmit antenna height (m)			
F1	69.0							10.0			

Δ f (MHz)	−0.9	−0.8	−0.6	−0.4	−0.2	0.0	0.2	0.4	0.6	0.8	0.9
PR (dB)	−60.0	−6.6	2.7	3.2	4.1	6.5	4.1	3.2	2.7	−6.6	−60.0

Civil fixed links, analogue (1.5 GHz). No information, CW interference data used											
Service identifier	Field strength to be protected in dB(μV/m)							Transmit antenna height (m)			
F2	58.0							10.0			

Δ f (MHz)	−0.9	−0.8	−0.6	−0.4	−0.2	0.0	0.2	0.4	0.6	0.8	0.9
PR (dB)	−60.0	−6.6	2.7	3.2	4.1	6.5	4.1	3.2	2.7	−6.6	−60.0

1.5 GHz digital point-to-multipoint telephone system (IRT 1500) as FB											
Service identifier	Field strength to be protected in dB(μV/m)							Transmit antenna height (m)			
F3	69,0							10,0			

Δ f (MHz)	−3.2	−3.1	−3.0	−2.9	−2.8	−2.7	−2.6	−2.5	−2.4	−2.3	−2.2
PR (dB)	−43.0	−42.2	−42.0	−41.8	−41.5	−40.5	−37.8	−35.0	−32.0	−30.0	−27.0
Δ f (MHz)	−2.1	−2.0	−1.9	−1.8	−1.7	−1.6	−1.5	−1.4	−1.3	−1.2	−1.1
PR (dB)	−26.8	−26.2	−26.0	−26.0	−24.0	−20.0	−16.0	−11.5	−7.5	−5.8	−2.8
Δ f (MHz)	−1.0	−0.9	−0.8	−0.7	−0.6	−0.5	−0.4	−0.3	−0.2	0.0	0.2
PR (dB)	−1.0	1.3	2.0	3.0	4.0	4.0	4.2	4.2	5.0	5.0	5.0
Δ f (MHz)	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0	1.1	1.2	1.3
PR (dB)	4.2	4.2	4.0	4.0	3.0	2.0	1.3	−1.0	−2.8	−5.8	−7.5
Δ f (MHz)	1.4	1.5	1.6	1.7	1.8	1.9	2.0	2.1	2.2	2.3	2.4
PR (dB)	−11.5	−16.0	−20.0	−24.0	−26.0	−26.0	−26.2	−26.8	−27.0	−30.0	−32.0
Δ f (MHz)	2.5	2.6	2.7	2.8	2.9	3.0	3.1	3.2			
PR (dB)	−35.0	−37.8	−40.5	−41.5	−41.8	−42.0	−42.2	−43.0			

Telemetry (1.5 GHz). No information, CW interference data used											
Service identifier	Field strength to be protected in dB(μV/m)							Transmit antenna height (m)			
F4	69.0							10.0			

Δ f (MHz)	−0.9	−0.8	−0.6	−0.4	−0.2	0.0	0.2	0.4	0.6	0.8	0.9
PR (dB)	−60.0	−6.6	2.7	3.2	4.1	6.5	4.1	3.2	2.7	−6.6	−60.0

Civil fixed links, analogue (1.5 GHz), 500 kHz bandwidth. No information, CW interference data used											
Service identifier	Field strength to be protected in dB(μ V/m)							Transmit antenna height (m)			
SD	69.0							10.0			

Δf (MHz)	-1.368	-1.268	-0.6	-0.4	-0.2	0.0	0.2	0.4	0.6	1.268	1.368
PR (dB)	-60.0	-6.6	2.7	3.2	4.1	6.5	4.1	3.2	2.7	-6.6	-60.0

Russian aeronautical telemetry at 1.5 GHz, no information, XR data used											
Service identifier	Field strength to be protected in dB(μ V/m)							Transmit antenna height (m)			
XR	69.0							10000			

Δf (MHz)	-0.9	-0.8	-0.6	-0.4	-0.2	0.0	0.2	0.4	0.6	0.8	0.9
PR (dB)	-66.0	-6.6	2.7	3.2	4.1	6.5	4.1	3.2	2.7	-6.6	-66.0

Ukrainian aeronautical telemetry at 1.5 GHz, no information, XU data used											
Service identifier	Field strength to be protected in dB(μ V/m)							Transmit antenna height (m)			
XU	69.0							10000			

Δf (MHz)	-0.9	-0.8	-0.6	-0.4	-0.2	0.0	0.2	0.4	0.6	0.8	0.9
PR (dB)	-66.0	-6.6	2.7	3.2	4.1	6.5	4.1	3.2	2.7	-6.6	-66.0

Video link											
Service identifier	Field strength to be protected in dB(μ V/m)							Transmit antenna height (m)			
YB	69.0							10.0			

Δf (MHz)	-8.0	-7.5	-7.0	-6.5	-6.0	-5.5	-5.0	-4.5	-4.0	-3.5	-3.0
PR (dB)	-42.0	-23.5	-10.0	-3.0	-2.0	-3.0	-24.0	-21.0	-23.0	-31.0	-31.5
Δf (MHz)	-2.5	-2.0	-1.5	-1.0	-0.9	-0.8	-0.7	-0.6	0.0	0.6	0.7
PR (dB)	-30.0	-28.5	-25.0	-19.5	-17.5	-11.0	-7.0	-1.5	-1.5	-4.0	-5.5
Δf (MHz)	0.8	0.9	1.0	2.0	3.0						
PR (dB)	-13.5	-17.0	-20.0	-33.0	-47.5						

Where no information concerning protection ratios for T-DAB suffering interference from other services has been supplied to the Planning Meeting, the administrations concerned should develop appropriate sharing criteria by mutual agreement. When available, one could use the relevant ITU-R Recommendations or ERC and ECC Decisions and Recommendations.

1.5 GHz digital point-to-multipoint telephone system (IRT 1500)											
Service identifier	Field strength to be protected in dB(μ V/m)					Receiver height (m)			Separation distance (m)		
FB	20.0					10.0					

Δf (MHz)	−2.200	−2.100	−2.000	−1.900	−1.800	−1.700	−1.600	−1.500	−1.400	−1.300	−1.200
PR (dB) 1%	−25.0	−22.0	−20.0	−19.0	−16.0	−12.0	−8.0	−2.0	5.0	11.0	12.0
dB (μ V/m) 1%	45.0	42.0	40.0	39.0	36.0	32.0	28.0	22.0	15.0	9.0	8.0
Δf (MHz)	0.000	1.200	1.300	1.400	1.500	1.600	1.700	1.800	1.900	2.000	2.100
PR (dB) 1%	12.0	12.0	11.0	5.0	−2.0	−8.0	−12.0	−16.0	−19.0	−20.0	−22.0
dB (μ V/m) 1%	8.0	8.0	9.0	15.0	22.0	28.0	32.0	36.0	39.0	40.0	42.0
Δf (MHz)	2.200										
PR (dB) 1%	−25.0										
dB (μ V/m) 1%	45.0										

Civil fixed links, analogue (1.5 GHz)											
Service identifier	Field strength to be protected in dB(μ V/m)					Receiver height (m)			Separation distance (m)		
F1	31.0					10.0					

Δf (MHz)	−4.768	−3.768	−2.768	−2.268	−1.768	−1.518	−1.268	−0.768	0.000	0.768	1.268
PR (dB) 1%	−43.0	−26.0	−17.0	−16.0	−11.0	−8.0	−5.0	4.0	12.0	7.0	6.0
dB (μ V/m) 1%	74.0	57.0	48.0	47.0	42.0	39.0	36.0	27.0	19.0	24.0	25.0
Δf (MHz)	1.518	1.768	2.268	2.768	3.768	4.768					
PR (dB) 1%	3.0	1.0	−5.0	−15.0	−25.0	−41.0					
dB (μ V/m) 1%	28.0	30.0	36.0	46.0	56.0	72.0					

Civil fixed links, analogue (1.5 GHz)											
Service identifier	Field strength to be protected in dB(μ V/m)					Receiver height (m)			Separation distance (m)		
F2	31.0					10.0					

Δf (MHz)	−4.76	−3.768	−2.768	−2.268	−1.768	−1.518	−1.268	−0.768	0.000	0.768	1.268
PR (dB) 1%	−43.0	−26.0	−17.0	−16.0	−11.0	−8.0	−5.0	4.0	12.0	7.0	6.0
dB (μ V/m) 1%	74.0	57.0	48.0	47.0	42.0	39.0	36.0	27.0	19.0	24.0	25.0
Δf (MHz)	1.518	1.768	2.268	2.768	3.768	4.768					
PR (dB) 1%	3.0	1.0	−5.0	−15.0	−25.0	−41.0					
dB (μ V/m) 1%	28.0	30.0	36.0	46.0	56.0	72.0					

1.5 GHz digital point-to-multipoint telephone system (IRT 1500)											
Service identifier	Field strength to be protected in dB(μV/m)					Receiver height (m)			Separation distance (m)		
F3	20.0					10.0					

Δ f (MHz)	−2.200	−2.100	−2.000	−1.900	−1.800	−1.700	−1.600	−1.500	−1.400	−1.300	−1.200
PR (dB) 1%	−25.0	−22.0	−20.0	−19.0	−16.0	−12.0	−8.0	−2.0	5.0	11.0	12.0
dB (μV/m) 1%	45.0	42.0	40.0	39.0	36.0	32.0	28.0	22.0	15.0	9.0	8.0
Δ f (MHz)	0.000	1.200	1.300	1.400	1.500	1.600	1.700	1.800	1.900	2.000	2.100
PR (dB) 1%	12.0	12.0	11.0	5.0	−2.0	−8.0	−12.0	−16.0	−19.0	−20.0	−22.0
dB (μV/m) 1%	8.0	8.0	9.0	15.0	22.0	28.0	32.0	36.0	39.0	40.0	42.0
Δ f (MHz)	2.200										
PR (dB) 1%	−25.0										
dB (μV/m) 1%	45.0										

Telemetry (1.5 GHz). No information (−60 dB)											
Service identifier	Field strength to be protected in dB(μV/m)					Receiver height (m)			Separation distance (m)		
F4	0.0					10.0					

Δ f (MHz)	−0.100	0.000	0.100								
PR (dB) 1%	−60.0	−60.0	−60.0								
dB (μV/m) 1%	60.0	60.0	60.0								

Civil fixed links, analogue (1.5 GHz), 500 kHz bandwidth											
Service identifier	Field strength to be protected in dB(μV/m)					Receiver height (m)			Separation distance (m)		
SD	27.0					10.0					

Δ f (MHz)	−1.36	−1.268	−0.768	0.000	0.768	1.268	1.368				
PR (dB) 1%	−45.0	4.0	4.0	12.0	4.0	4.0	−45.0				
dB (μV/m) 1%	72.0	23.0	23.0	15.0	23.0	23.0	72.0				

Russian aeronautical mobile (telemetry) service at 1.5 GHz											
Service identifier	Field strength to be protected in dB(μV/m)					Receiver height (m)			Separation distance (m)		
XR	15.0					10.0			1000.0		

Δ f (MHz)	−8.00	−7.000	−6.000	−5.000	−4.000	−3.000	−2.000	0.000	2.000	3.000	4.000
PR (dB) 1%	−30.0	−20.0	−10.0	−2.0	5.0	10.0	15.0	15.0	15.0	10.0	5.0
dB (μV/m) 1%	60.0	50.0	40.0	32.0	25.0	20.0	15.0	15.0	15.0	20.0	25.0
Δ f (MHz)	5.000	6.000	7.000	8.000							
PR (dB) 1%	−2.0	−10.0	−20.0	−30.0							
dB (μV/m) 1%	32.0	40.0	505.0	60.0							

Ukrainian aeronautical mobile (telemetry) service at 1.5 GHz			
Service identifier	Field strength to be protected in dB(μV/m)	Receiver height (m)	Separation distance (m)
XU	15.0	10.0	1000.0

Δ f (MHz)	−8.00	−7.000	−6.000	−5.000	−4.000	−3.000	−2.000	0.000	2.000	3.000	4.000
PR (dB) 1%	−30.0	−20.0	−10.0	−2.0	5.0	10.0	15.0	15.0	15.0	10.0	5.0
dB (μV/m) 1%	45.0	35.0	25.0	17.0	10.0	5.0	0.0	0.0	0.0	5.0	10.0
Δ f (MHz)	5.000	6.000	7.000	8.000							
PR (dB) 1%	−2.0	−10.0	−20.0	−30.0							
dB (μV/m) 1%	17.0	25.0	35.0	45.0							

Video link (F)			
Service identifier	Field strength to be protected in dB(μV/m)	Receiver height (m)	Separation distance (m)
YB	29.0	500.0	

Δ f (MHz)	−13.000	−12.000	0.000	12.000	13.000						
PR (dB) 1%	−46.0	20.0	20.0	20.0	−46.0						
dB (μV/m) 1%	75.0	9.0	9.0	9.0	75.0						

Satellite sound broadcasting - digital (1.5 GHz)			
Service identifier	Field strength to be protected in dB(μV/m)	Receiver height (m)	Separation distance (m)
ZA	29.0	10	

Δ f (MHz)	−3.324	−1.712	−0.856	0.000	0.856	1.712	3.324				
PR (dB) 1%	−55.8	−13.1	13.0	13.0	13.0	−13.1	−55.8				
dB (μV/m) 1%	84.8	42.1	16.0	16.0	16.0	42.1	84.8				

Where no information concerning protection ratios for other services suffering interference from T-DAB has been supplied to the Planning Meeting, the administrations concerned should develop appropriate sharing criteria by mutual agreement. When available one could use the relevant ITU-R Recommendations or ERC and ECC Decisions and Recommendations,.

5. T-DAB REFERENCE NETWORKS

The principles adopted by the CEPT for T-DAB allow a reasonable compromise between the density of the transmitters required to support the desired coverage and the potential to re-use the same frequency block with another programme content in other areas.

5.1 Definitions

The **reference point** is the point on the boundary of a Reference Network from which outgoing interference is calculated, see also Figures 3, 4 and 5. Incoming interference is calculated at the same point.

In the following text, two distances are defined; see also Figure 2.

i) The **separation distance** is the distance required between the borders (or peripheries) of two coverage areas served by either T-DAB services or by two different services. There will often be two separation distances, one for each service, because of different field strengths to be protected or because of different protection ratios for the two services. In such cases the longer of these two distances shall be used.

ii) The **transmitter distance** is the distance between adjacent transmitter sites in an SFN.

The networks shown in Figure 2 have, for convenience, been represented as regular hexagonal structures.

5.2 T-DAB transmitter network structures

T-DAB networks consist of one of two basic models or combinations thereof:

i) a single frequency network (SFN) using non-directional transmitting antennas, also referred to as an "open network"; see also Figure 2. A single transmitter can be considered as a special case of an open configuration.

ii) an SFN using directional transmitting antennas along the periphery of the coverage area, also referred to as a "closed network"; see also Figure 2.

5.3 Reference single frequency networks

5.3.1 Reference network for T-DAB planning

A reference network is a tool for developing appropriate values for separation distances and for estimating how much interference a typical SFN might produce at a given distance.

In interfering field strength calculations the power sum method is used as described in Section 2.1 of Annex 4. For individual field strength calculations the method described in section 2.2 of this Annex is used.

5.3.2 Types of Reference networks

5.3.2.1 Reference Network One - Seven transmitter "open" network (also used for Wiesbaden, 1995); see Figure 3

Number of transmitters:	7
Transmitter network geometry:	hexagonal
Effective transmitting antenna height:	
Peripheral transmitters:	150 m
Central transmitter:	150 m
Distance between adjacent transmitters:	15 km
Radiated power:	
Peripheral transmitters:	1 kW
Central transmitter:	0.5kW
Transmitting antenna directivity:	
Peripheral transmitters:	non-directional
Central transmitter:	non-directional
Width of the approximate hexagonal coverage area:	60 km

Use of this network is regarded as appropriate for requirements larger than about 60 km in width.

5.3.2.2 Reference Network Two - Seven transmitter "closed" network, see Figure 4

Number of transmitters:	7
Transmitter network geometry:	hexagonal
Effective transmitting antenna height:	
Peripheral transmitters:	50 m
Central transmitter:	150 m
Distance between adjacent transmitters:	26 km
Radiated power:	
Peripheral transmitters:	5 kW
Central transmitter:	1.25 kW
Transmitting antenna directivity:	
Peripheral transmitters:	–12 dB over a sector of 240 degrees
Central transmitter:	non-directional
Width of the approximate hexagonal coverage area:	45 km

Use of this network is regarded as appropriate for requirements from about 30 km to 60 km in width

5.3.2.3 Reference Network Three - Four transmitter "closed" network, see Figure 5

Number of transmitters:	4
Transmitter network geometry:	square
Effective transmitting antenna height:	
Peripheral transmitters:	50 m
Distance between adjacent transmitters:	16 km
Radiated power:	
Peripheral transmitters:	1 kW
Transmitting antenna directivity:	–12 dB over a sector of 225 degrees
Width of the approximate octagonal coverage area:	23 km

Use of this network is regarded as appropriate for requirements up to about 30 km in width.

Note that in all cases adjustment of the transmitter characteristics may be needed when converting from allotments to assignments and that alternative network structures should have similar coverage area and interference potential as the reference networks presented above.

5.3.3 Derivation of separation distances

The maximum interfering field strength from any service on the border of the reference network is:

$$E_I^{Max} = E_W^{Min} - PR - PC$$

where

E_I^{Max} = maximum interfering field strength on the border of the reference network

E_W^{Min} = minimum median wanted field strength for planning (69 dB(μV/m))

PR = protection ratio, depending on service under consideration

PC = propagation correction 18 dB.

The interfering field strengths for land, cold sea and warm sea paths produced by these Reference Networks are shown in Figures 6a, 6b, 7a, 7b, 8a and 8b. Corresponding numeric values are provided in the tables 5a, 5b, 6a, 6b, 7a and 7b, respectively. Separation distances based on propagation for 1% of time are given in table 4 below.

		Reference network 1 receiving interference	Reference network 2 receiving interference	Reference network 3 receiving interference
Maximum permissible co-block interfering field strength (dB μ V/m)		41 dB μ V/m	43 dB μ V/m	45 dB μ V/m
Reference network 1 as interferer	Land	50 km	44 km	38 km
	Cold sea	314 km	290 km	269 km
	Warm sea	434 km	392 km	350 km
Reference network 2 as interferer	Land	39 km	34 km	30 km
	Cold sea	341 km	318 km	297 km
	Warm sea	466 km	426 km	386 km
Reference network 3 as interferer	Land	23 km	20 km	17 km
	Cold sea	292 km	272 km	255 km
	Warm sea	388 km	348 km	313 km

Table 4: Reference network separation distances.

5.3.4 Nominal transmitter location for the calculation of potential T-DAB interference to the aeronautical mobile service

The centre of the reference network shall be used as the nominal location for the network to calculate interference to an aeronautical reception test point. In this case the power used for calculations is 38.1 dBW.

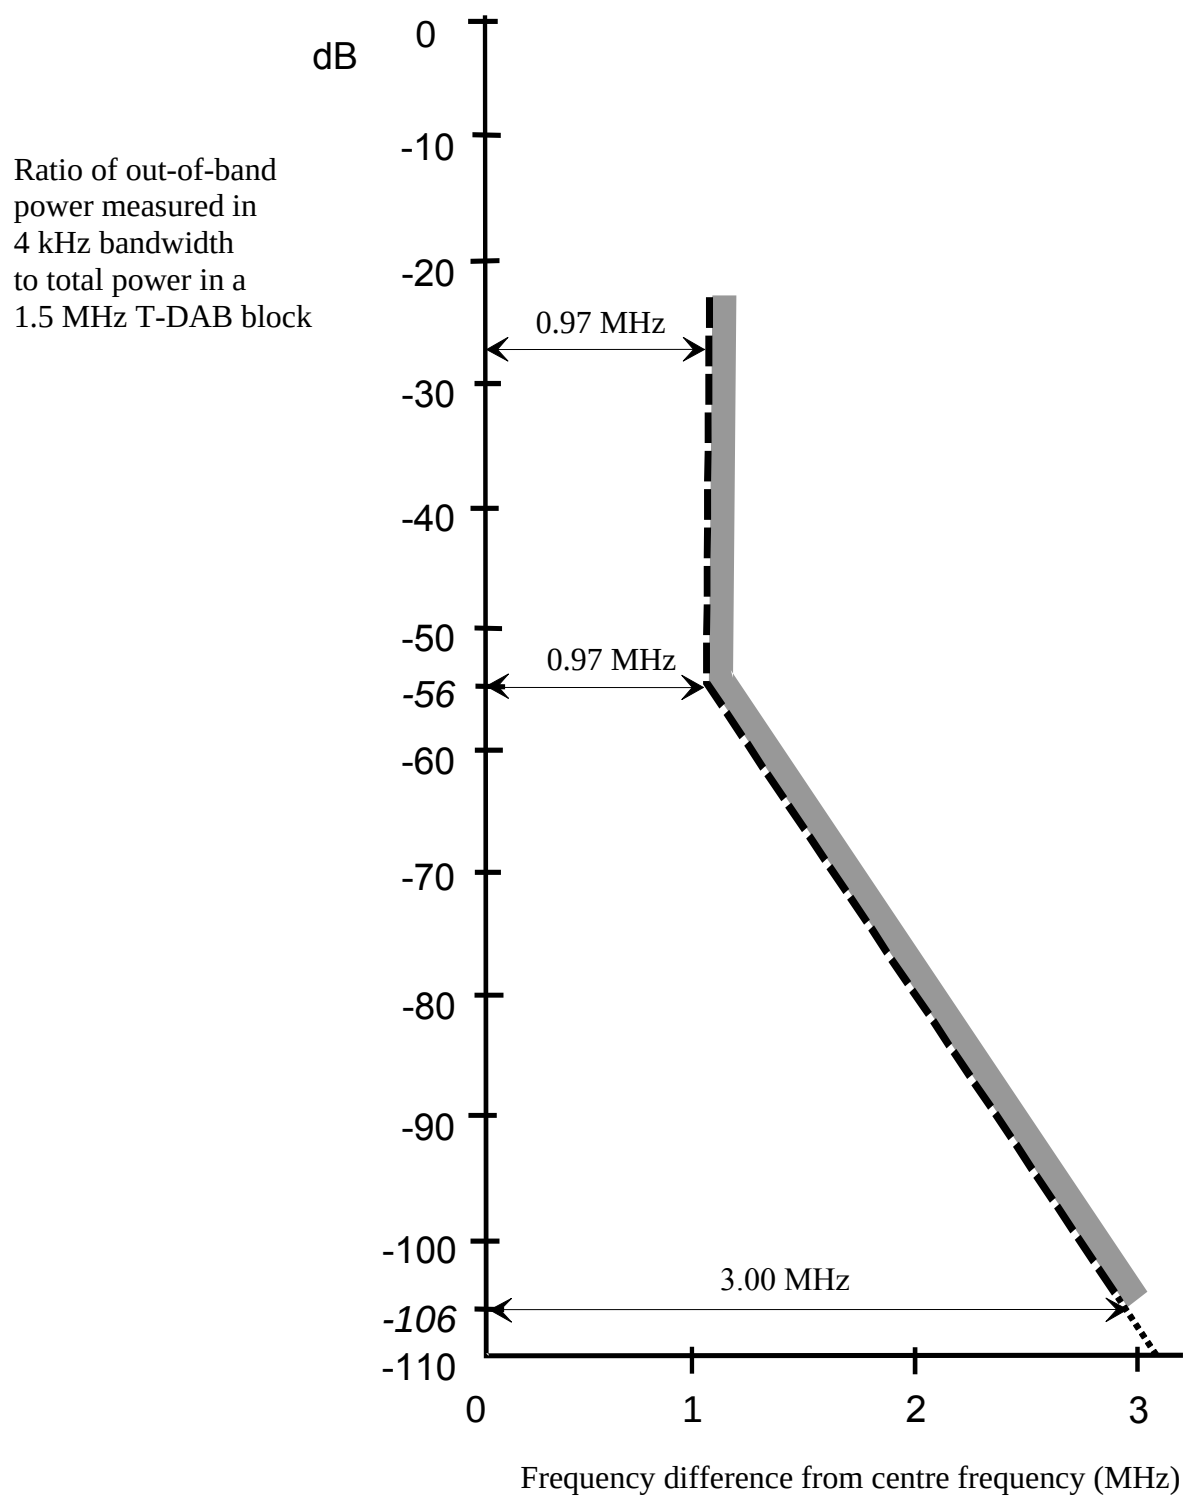


Figure 1: Spectrum mask for T-DAB out-of-band emissions

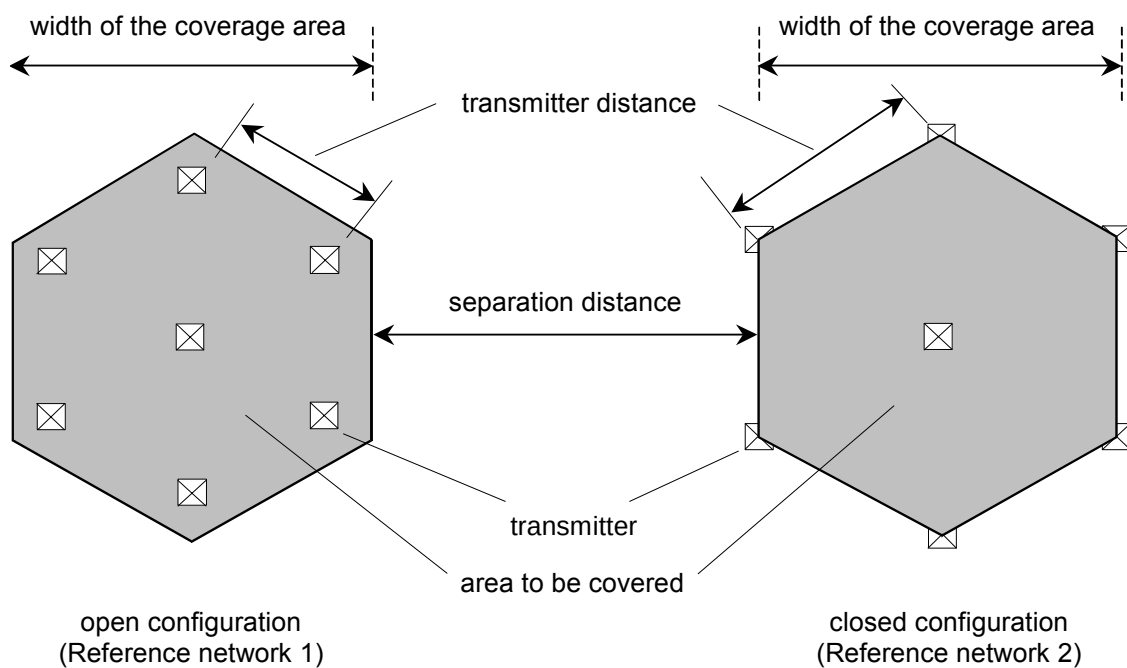


Figure 2: Example of T-DAB network structures and distances – co-block case

Note: For this example two different 7 transmitter networks have been used. Other network configurations are possible.

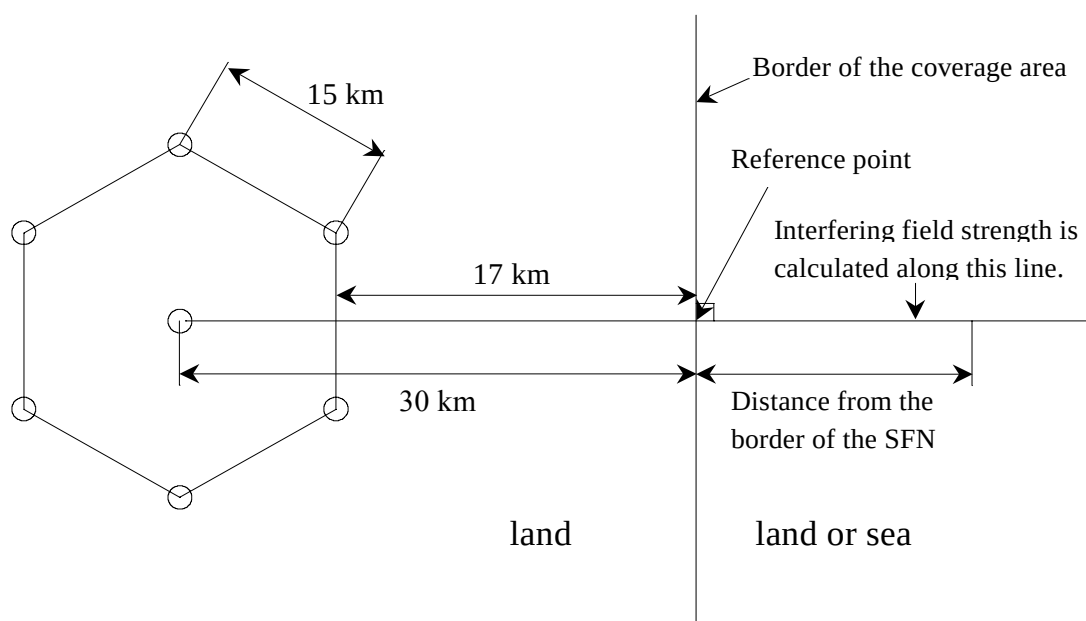


Figure 3: Layout diagram of Reference Network One.

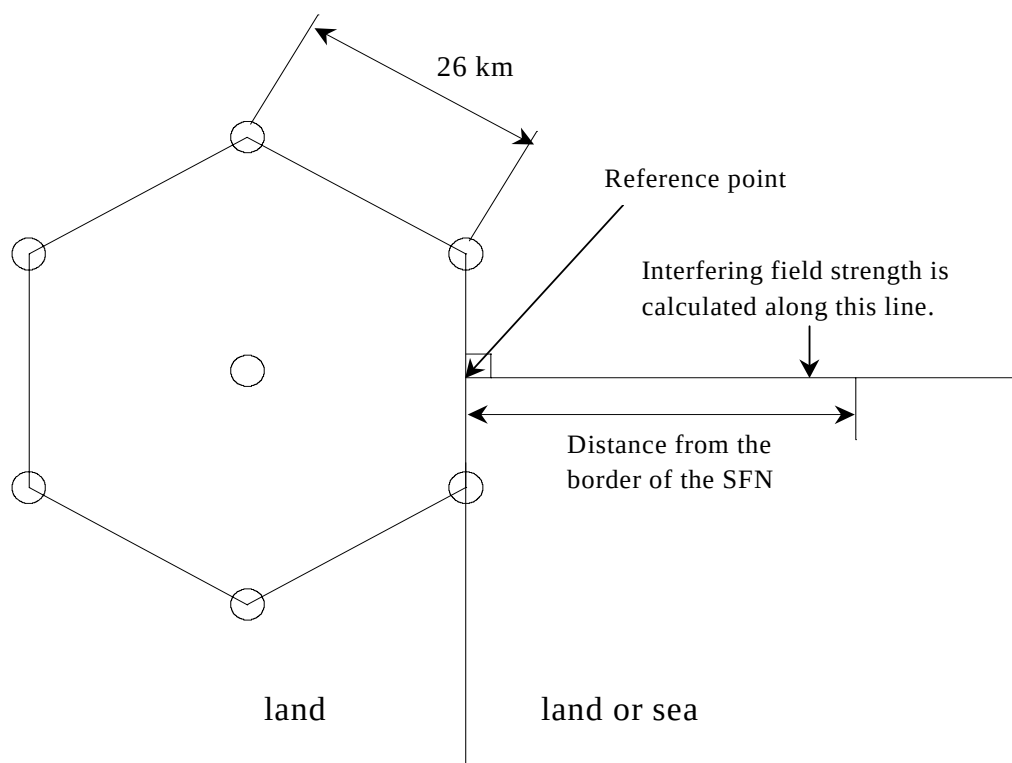


Figure 4: Layout diagram of Reference Network Two

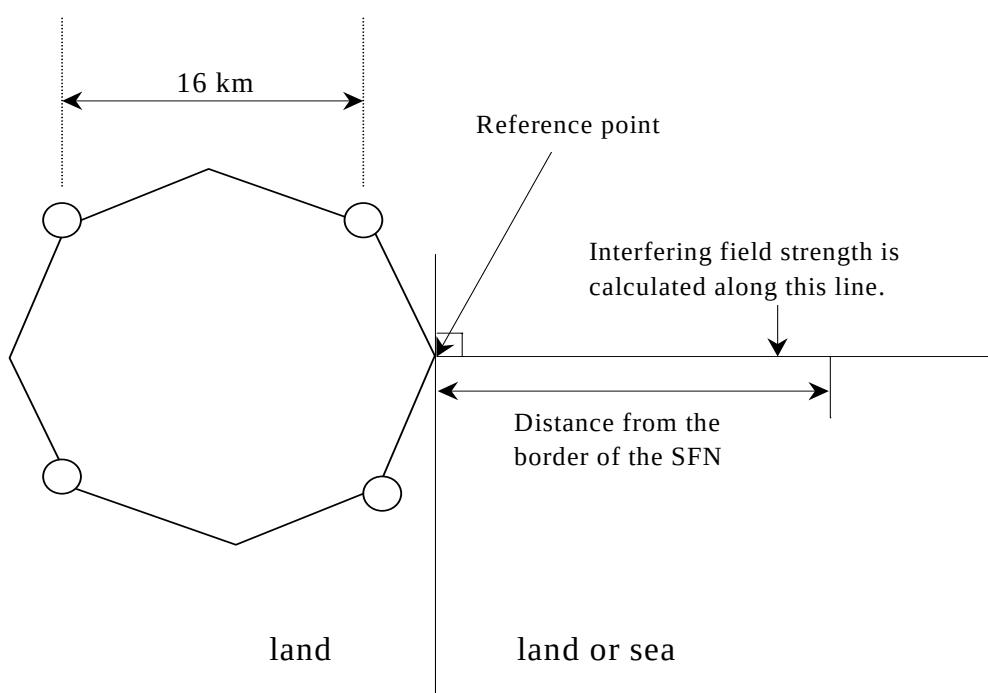


Figure 5: Layout diagram of Reference Network Three.

Interference potential of Reference Network 1 for 50% of the time

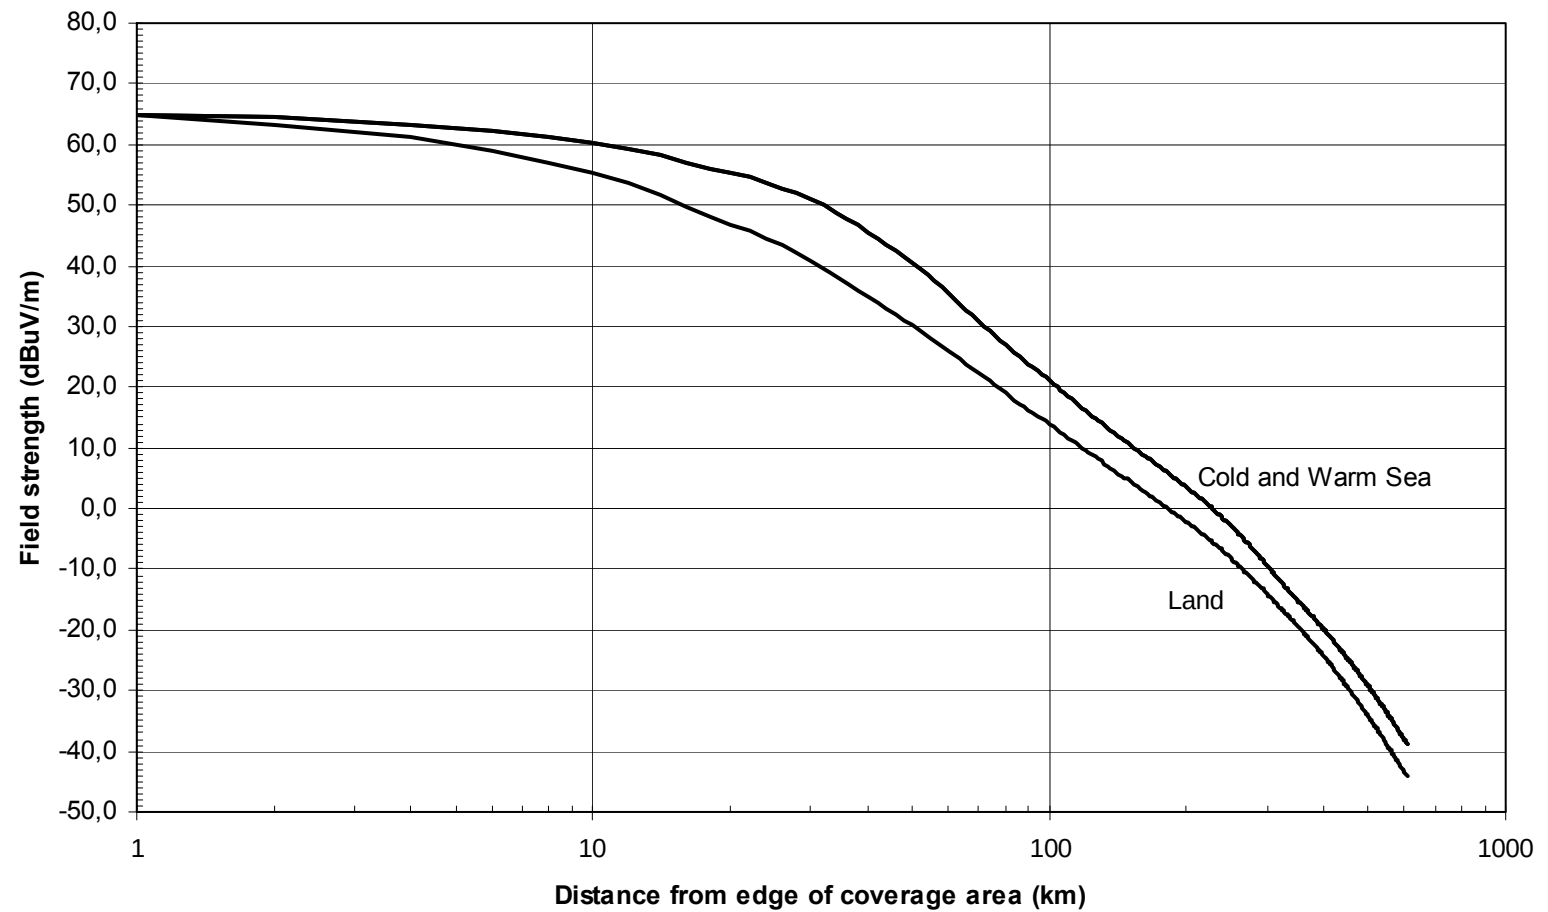


Figure 6a: Interference potential of Reference Network One for 50 % of time

Table 5a: Tabulated values for the interference potential of Reference Network 1 for 50% of time - (1)

Distance (km)	Land	Cold sea	Warm sea	Distance (km)	Land	Cold sea	Warm sea	Distance (km)	Land	Cold sea	Warm sea	Distance (km)	Land	Cold sea	Warm sea	Distance (km)	Land	Cold sea	Warm sea
0	65.5	65.5	65.5	60	26.1	35.5	35.5	120	9.6	16.2	16.2	180	0.3	6.2	6.2	240	-7.0	-1.6	-1.6
2	63.3	64.4	64.4	62	25.3	34.5	34.5	122	9.3	15.7	15.7	182	0.0	5.9	5.9	242	-7.2	-1.8	-1.8
4	61.1	63.3	63.3	64	24.6	33.6	33.6	124	8.9	15.3	15.3	184	-0.2	5.6	5.6	244	-7.5	-2.1	-2.1
6	59.0	62.3	62.3	66	23.8	32.7	32.7	126	8.5	14.9	14.9	186	-0.5	5.4	5.4	246	-7.7	-2.3	-2.3
8	57.1	61.3	61.3	68	23.1	31.8	31.8	128	8.1	14.5	14.5	188	-0.7	5.1	5.1	248	-8.0	-2.6	-2.6
10	55.3	60.3	60.3	70	22.4	31.0	31.0	130	7.8	14.1	14.1	190	-0.9	4.9	4.9	250	-8.2	-2.9	-2.9
12	53.6	59.4	59.4	72	21.8	30.1	30.1	132	7.4	13.7	13.7	192	-1.2	4.6	4.6	252	-8.4	-3.1	-3.1
14	51.6	58.2	58.2	74	21.1	29.3	29.3	134	7.1	13.3	13.3	194	-1.4	4.4	4.4	254	-8.7	-3.4	-3.4
16	49.7	57.1	57.1	76	20.4	28.5	28.5	136	6.7	13.0	13.0	196	-1.7	4.1	4.1	256	-8.9	-3.6	-3.6
18	48.1	56.1	56.1	78	19.7	27.8	27.8	138	6.4	12.6	12.6	198	-1.9	3.9	3.9	258	-9.2	-3.9	-3.9
20	46.9	55.3	55.3	80	19.1	27.0	27.0	140	6.1	12.3	12.3	200	-2.2	3.6	3.6	260	-9.4	-4.2	-4.2
22	45.8	54.6	54.6	82	18.4	26.2	26.2	142	5.7	11.9	11.9	202	-2.4	3.3	3.3	262	-9.6	-4.4	-4.4
24	44.6	53.7	53.7	84	17.9	25.6	25.6	144	5.4	11.6	11.6	204	-2.6	3.1	3.1	264	-9.9	-4.7	-4.7
26	43.4	52.8	52.8	86	17.3	25.0	25.0	146	5.1	11.2	11.2	206	-2.9	2.8	2.8	266	-10.1	-4.9	-4.9
28	42.1	51.9	51.9	88	16.8	24.4	24.4	148	4.8	10.9	10.9	208	-3.1	2.6	2.6	268	-10.4	-5.2	-5.2
30	40.8	50.9	50.9	90	16.3	23.8	23.8	150	4.5	10.6	10.6	210	-3.4	2.3	2.3	270	-10.6	-5.5	-5.5
32	39.4	49.9	49.9	92	15.8	23.3	23.3	152	4.2	10.3	10.3	212	-3.6	2.1	2.1	272	-10.8	-5.7	-5.7
34	38.2	48.8	48.8	94	15.3	22.7	22.7	154	3.9	9.9	9.9	214	-3.8	1.8	1.8	274	-11.1	-6.0	-6.0
36	37.1	47.7	47.7	96	14.8	22.1	22.1	156	3.6	9.6	9.6	216	-4.1	1.6	1.6	276	-11.3	-6.2	-6.2
38	36.0	46.6	46.6	98	14.4	21.6	21.6	158	3.3	9.3	9.3	218	-4.3	1.3	1.3	278	-11.5	-6.5	-6.5
40	35.0	45.5	45.5	100	13.9	21.1	21.1	160	3.0	9.0	9.0	220	-4.6	1.0	1.0	280	-11.8	-6.8	-6.8
42	34.0	44.5	44.5	102	13.4	20.5	20.5	162	2.7	8.7	8.7	222	-4.8	0.8	0.8	282	-12.0	-7.0	-7.0
44	33.0	43.4	43.4	104	13.0	20.0	20.0	164	2.4	8.4	8.4	224	-5.1	0.5	0.5	284	-12.2	-7.3	-7.3
46	32.0	42.4	42.4	106	12.5	19.5	19.5	166	2.1	8.1	8.1	226	-5.3	0.3	0.3	286	-12.4	-7.5	-7.5
48	31.1	41.4	41.4	108	12.1	19.0	19.0	168	1.9	7.8	7.8	228	-5.5	0.0	0.0	288	-12.7	-7.8	-7.8
50	30.2	40.4	40.4	110	11.7	18.5	18.5	170	1.6	7.5	7.5	230	-5.8	-0.3	-0.3	290	-12.9	-8.1	-8.1
52	29.3	39.4	39.4	112	11.3	18.0	18.0	172	1.3	7.3	7.3	232	-6.0	-0.5	-0.5	292	-13.1	-8.3	-8.3
54	28.4	38.4	38.4	114	10.8	17.6	17.6	174	1.1	7.0	7.0	234	-6.3	-0.8	-0.8	294	-13.3	-8.6	-8.6
56	27.6	37.4	37.4	116	10.4	17.1	17.1	176	0.8	6.7	6.7	236	-6.5	-1.0	-1.0	296	-13.6	-8.8	-8.8
58	26.8	36.4	36.4	118	10.0	16.6	16.6	178	0.5	6.4	6.4	238	-6.7	-1.3	-1.3	298	-13.8	-9.1	-9.1

Table 5a: Tabulated values for the interference potential of Reference Network 1 for 50% of time - (2)

Distance (km)	Land	Cold sea	Warm sea	Distance (km)	Land	Cold sea	Warm sea	Distance (km)	Land	Cold sea	Warm sea	Distance (km)	Land	Cold sea	Warm sea	Distance (km)	Land	Cold sea	Warm sea
300	-14.0	-9.4	-9.4	360	-20.4	-16.1	-16.1	420	-26.4	-21.9	-21.9	480	-32.3	-27.5	-27.5	540	-38.0	-32.8	-32.8
302	-14.3	-9.6	-9.6	362	-20.6	-16.3	-16.3	422	-26.6	-22.1	-22.1	482	-32.5	-27.6	-27.6	542	-38.2	-33.0	-33.0
304	-14.5	-9.9	-9.9	364	-20.8	-16.5	-16.5	424	-26.8	-22.2	-22.2	484	-32.7	-27.8	-27.8	544	-38.4	-33.2	-33.2
306	-14.7	-10.1	-10.1	366	-21.0	-16.7	-16.7	426	-27.0	-22.4	-22.4	486	-32.9	-28.0	-28.0	546	-38.6	-33.4	-33.4
308	-14.9	-10.4	-10.4	368	-21.2	-16.9	-16.9	428	-27.2	-22.6	-22.6	488	-33.1	-28.2	-28.2	548	-38.8	-33.6	-33.6
310	-15.1	-10.6	-10.6	370	-21.4	-17.1	-17.1	430	-27.4	-22.8	-22.8	490	-33.3	-28.4	-28.4	550	-39.0	-33.7	-33.7
312	-15.4	-10.9	-10.9	372	-21.6	-17.3	-17.3	432	-27.6	-23.0	-23.0	492	-33.5	-28.5	-28.5	552	-39.2	-33.9	-33.9
314	-15.6	-11.1	-11.1	374	-21.8	-17.5	-17.5	434	-27.8	-23.2	-23.2	494	-33.7	-28.7	-28.7	554	-39.4	-34.1	-34.1
316	-15.8	-11.4	-11.4	376	-22.0	-17.7	-17.7	436	-28.0	-23.4	-23.4	496	-33.8	-28.9	-28.9	556	-39.5	-34.3	-34.3
318	-16.0	-11.6	-11.6	378	-22.2	-17.9	-17.9	438	-28.2	-23.6	-23.6	498	-34.0	-29.1	-29.1	558	-39.7	-34.5	-34.5
320	-16.3	-11.9	-11.9	380	-22.4	-18.1	-18.1	440	-28.4	-23.7	-23.7	500	-34.2	-29.3	-29.3	560	-39.9	-34.6	-34.6
322	-16.5	-12.1	-12.1	382	-22.6	-18.3	-18.3	442	-28.6	-23.9	-23.9	502	-34.4	-29.4	-29.4	562	-40.1	-34.8	-34.8
324	-16.7	-12.3	-12.3	384	-22.8	-18.5	-18.5	444	-28.8	-24.1	-24.1	504	-34.6	-29.6	-29.6	564	-40.3	-35.0	-35.0
326	-16.9	-12.6	-12.6	386	-23.0	-18.7	-18.7	446	-29.0	-24.3	-24.3	506	-34.8	-29.8	-29.8	566	-40.5	-35.2	-35.2
328	-17.1	-12.8	-12.8	388	-23.2	-18.9	-18.9	448	-29.2	-24.5	-24.5	508	-35.0	-30.0	-30.0	568	-40.7	-35.3	-35.3
330	-17.3	-13.0	-13.0	390	-23.4	-19.1	-19.1	450	-29.4	-24.7	-24.7	510	-35.2	-30.2	-30.2	570	-40.8	-35.5	-35.5
332	-17.5	-13.2	-13.2	392	-23.6	-19.2	-19.2	452	-29.6	-24.9	-24.9	512	-35.4	-30.3	-30.3	572	-41.0	-35.7	-35.7
334	-17.7	-13.5	-13.5	394	-23.8	-19.4	-19.4	454	-29.8	-25.1	-25.1	514	-35.6	-30.5	-30.5	574	-41.2	-35.9	-35.9
336	-17.9	-13.7	-13.7	396	-24.0	-19.6	-19.6	456	-30.0	-25.2	-25.2	516	-35.7	-30.7	-30.7	576	-41.4	-36.0	-36.0
338	-18.1	-13.9	-13.9	398	-24.2	-19.8	-19.8	458	-30.2	-25.4	-25.4	518	-35.9	-30.9	-30.9	578	-41.5	-36.2	-36.2
340	-18.3	-14.1	-14.1	400	-24.4	-20.0	-20.0	460	-30.4	-25.6	-25.6	520	-36.1	-31.1	-31.1	580	-41.7	-36.4	-36.4
342	-18.5	-14.3	-14.3	402	-24.6	-20.2	-20.2	462	-30.6	-25.8	-25.8	522	-36.3	-31.2	-31.2	582	-41.9	-36.6	-36.6
344	-18.7	-14.5	-14.5	404	-24.8	-20.4	-20.4	464	-30.8	-26.0	-26.0	524	-36.5	-31.4	-31.4	584	-42.1	-36.7	-36.7
346	-18.9	-14.7	-14.7	406	-25.0	-20.6	-20.6	466	-31.0	-26.2	-26.2	526	-36.7	-31.6	-31.6	586	-42.2	-36.9	-36.9
348	-19.1	-14.9	-14.9	408	-25.2	-20.7	-20.7	468	-31.1	-26.4	-26.4	528	-36.9	-31.8	-31.8	588	-42.4	-37.1	-37.1
350	-19.3	-15.1	-15.1	410	-25.4	-20.9	-20.9	470	-31.3	-26.5	-26.5	530	-37.1	-31.9	-31.9	590	-42.6	-37.2	-37.2
352	-19.5	-15.3	-15.3	412	-25.6	-21.1	-21.1	472	-31.5	-26.7	-26.7	532	-37.3	-32.1	-32.1	592	-42.7	-37.4	-37.4
354	-19.7	-15.5	-15.5	414	-25.8	-21.3	-21.3	474	-31.7	-26.9	-26.9	534	-37.5	-32.3	-32.3	594	-42.9	-37.6	-37.6
356	-19.9	-15.7	-15.7	416	-26.0	-21.5	-21.5	476	-31.9	-27.1	-27.1	536	-37.6	-32.5	-32.5	596	-43.1	-37.7	-37.7
358	-20.2	-15.9	-15.9	418	-26.2	-21.7	-21.7	478	-32.1	-27.3	-27.3	538	-37.8	-32.7	-32.7	598	-43.2	-37.9	-37.9
																600	-43.4	-38.1	-38.1

Interference potential of Reference Network 1 for 1% of the time

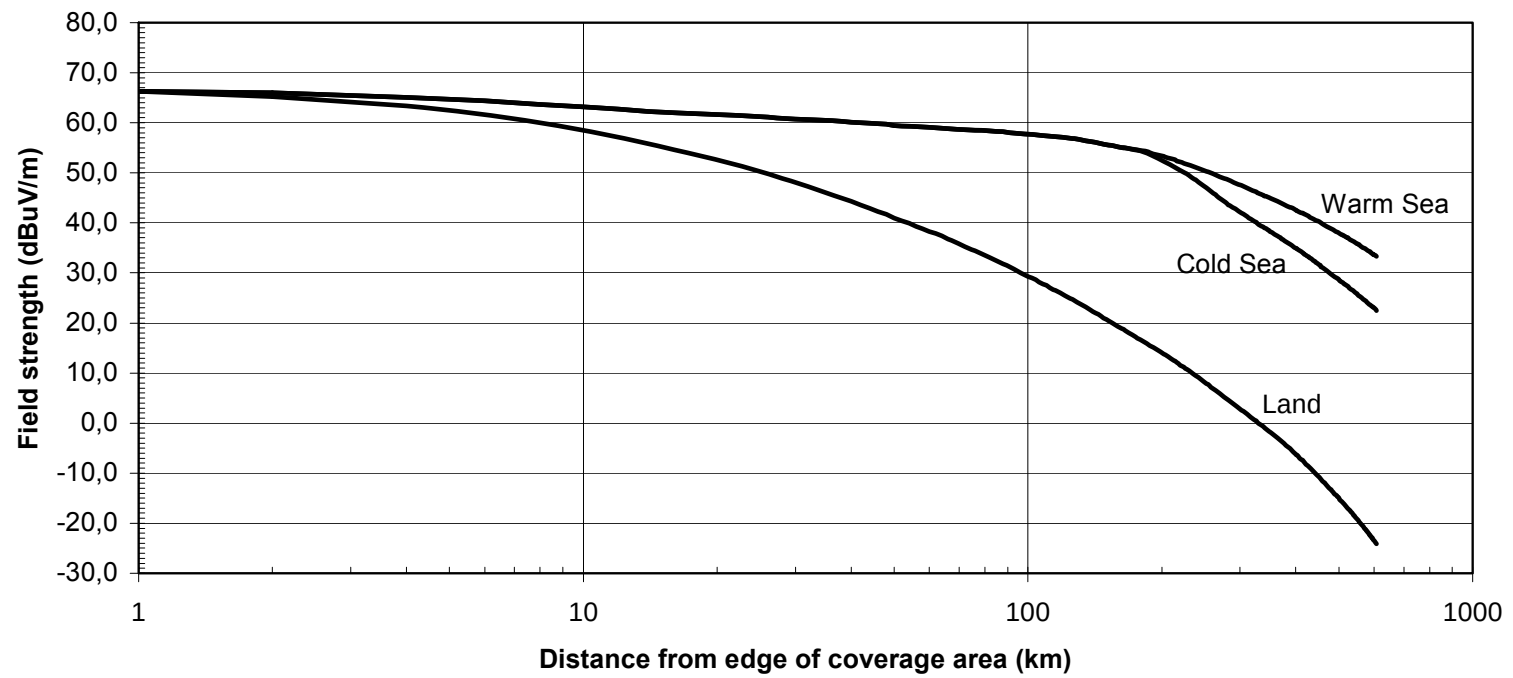


Figure 6b: Interference potential of Reference Network One for 1% of time

Table 5b: Tabulated values for the interference potential of Reference Network 1 for 1% of time - (1)

Distance (km)	Land	Cold sea	Warm sea	Distance (km)	Land	Cold sea	Warm sea	Distance (km)	Land	Cold sea	Warm sea	Distance (km)	Land	Cold sea	Warm sea	Distance (km)	Land	Cold sea	Warm sea
0	67.1	67.1	67.1	60	38.3	59.1	59.1	120	25.7	57.1	57.1	180	16.5	54.3	54.4	240	9.3	48.4	51.0
2	65.2	66.0	66.0	62	37.9	59.0	59.0	122	25.3	57.0	57.0	182	16.3	54.2	54.4	242	9.1	48.1	50.9
4	63.4	65.1	65.1	64	37.4	58.9	58.9	124	25.0	56.9	56.9	184	16.0	54.0	54.3	244	8.8	47.9	50.8
6	61.6	64.4	64.4	66	36.8	58.8	58.8	126	24.7	56.8	56.8	186	15.8	53.9	54.2	246	8.6	47.7	50.7
8	60.0	63.7	63.7	68	36.3	58.8	58.8	128	24.3	56.8	56.8	188	15.5	53.7	54.0	248	8.4	47.4	50.5
10	58.5	63.2	63.2	70	35.8	58.7	58.7	130	24.0	56.7	56.7	190	15.3	53.5	53.9	250	8.1	47.2	50.4
12	57.1	62.7	62.7	72	35.3	58.6	58.6	132	23.7	56.6	56.6	192	15.0	53.3	53.8	252	7.9	47.0	50.3
14	55.8	62.3	62.3	74	34.8	58.5	58.5	134	23.3	56.5	56.5	194	14.8	53.1	53.7	254	7.7	46.8	50.2
16	54.6	62.1	62.1	76	34.4	58.5	58.5	136	23.0	56.4	56.4	196	14.6	52.9	53.6	256	7.4	46.5	50.1
18	53.6	61.8	61.8	78	34.0	58.5	58.5	138	22.7	56.3	56.3	198	14.3	52.7	53.5	258	7.2	46.3	50.0
20	52.6	61.6	61.6	80	33.5	58.4	58.4	140	22.3	56.2	56.2	200	14.1	52.5	53.4	260	7.0	46.1	49.8
22	51.6	61.5	61.5	82	33.1	58.4	58.4	142	22.0	56.1	56.1	202	13.8	52.3	53.3	262	6.8	45.8	49.7
24	50.7	61.3	61.3	84	32.7	58.3	58.3	144	21.7	56.0	56.0	204	13.6	52.1	53.1	264	6.5	45.6	49.6
26	49.8	61.1	61.1	86	32.2	58.2	58.2	146	21.4	55.8	55.8	206	13.3	51.9	53.0	266	6.3	45.4	49.5
28	48.9	60.9	60.9	88	31.8	58.2	58.2	148	21.0	55.7	55.7	208	13.1	51.7	52.9	268	6.1	45.1	49.4
30	48.1	60.8	60.8	90	31.4	58.1	58.1	150	20.7	55.6	55.6	210	12.9	51.5	52.8	270	5.9	44.9	49.2
32	47.3	60.7	60.7	92	31.0	58.0	58.0	152	20.4	55.5	55.5	212	12.6	51.3	52.7	272	5.7	44.7	49.1
34	46.5	60.6	60.6	94	30.5	57.9	57.9	154	20.1	55.4	55.4	214	12.4	51.1	52.6	274	5.5	44.5	49.0
36	45.7	60.4	60.4	96	30.1	57.9	57.9	156	19.8	55.4	55.4	216	12.1	50.9	52.4	276	5.2	44.3	48.9
38	45.0	60.3	60.3	98	29.7	57.8	57.8	158	19.5	55.3	55.3	218	11.9	50.7	52.3	278	5.0	44.1	48.8
40	44.3	60.1	60.1	100	29.3	57.7	57.7	160	19.2	55.2	55.2	220	11.6	50.5	52.2	280	4.8	43.9	48.7
42	43.6	60.0	60.0	102	29.0	57.7	57.7	162	18.9	55.1	55.1	222	11.4	50.3	52.1	282	4.6	43.6	48.6
44	42.9	59.9	59.9	104	28.6	57.6	57.6	164	18.7	55.0	55.1	224	11.2	50.1	51.9	284	4.4	43.5	48.5
46	42.3	59.8	59.8	106	28.2	57.5	57.5	166	18.4	55.0	55.0	226	10.9	49.9	51.8	286	4.2	43.3	48.3
48	41.7	59.7	59.7	108	27.8	57.5	57.5	168	18.1	54.9	54.9	228	10.7	49.7	51.7	288	4.0	43.1	48.2
50	41.0	59.5	59.5	110	27.5	57.4	57.4	170	17.8	54.8	54.8	230	10.5	49.5	51.6	290	3.8	43.0	48.1
52	40.4	59.4	59.4	112	27.1	57.3	57.3	172	17.6	54.7	54.8	232	10.2	49.3	51.5	292	3.6	42.8	48.0
54	39.9	59.3	59.3	114	26.7	57.3	57.3	174	17.3	54.6	54.7	234	10.0	49.0	51.3	294	3.4	42.7	47.9
56	39.3	59.3	59.3	116	26.4	57.2	57.2	176	17.0	54.5	54.6	236	9.8	48.8	51.2	296	3.2	42.5	47.8
58	38.8	59.2	59.2	118	26.0	57.1	57.1	178	16.8	54.4	54.5	238	9.5	48.6	51.1	298	3.0	42.3	47.7

Table 5b: Tabulated values for the interference potential of Reference Network 1 for 1% of time - (2)

Distance (km)	Land	Cold sea	Warm sea	Distance (km)	Land	Cold sea	Warm sea	Distance (km)	Land	Cold sea	Warm sea	Distance (km)	Land	Cold sea	Warm sea	Distance (km)	Land	Cold sea	Warm sea
300	2.8	42.2	47.6	360	-2.6	37.6	44.5	420	-8.0	33.7	41.7	480	-13.3	29.8	38.8	540	-18.4	26.4	36.3
302	2.6	42.0	47.5	362	-2.8	37.5	44.4	422	-8.2	33.6	41.6	482	-13.5	29.7	38.8	542	-18.5	26.2	36.2
304	2.4	41.8	47.4	364	-3.0	37.4	44.3	424	-8.3	33.4	41.5	484	-13.7	29.6	38.7	544	-18.7	26.1	36.1
306	2.3	41.7	47.2	366	-3.1	37.2	44.2	426	-8.5	33.3	41.4	486	-13.8	29.4	38.6	546	-18.9	26.0	36.0
308	2.1	41.5	47.1	368	-3.3	37.1	44.1	428	-8.7	33.2	41.3	488	-14.0	29.3	38.5	548	-19.0	25.9	35.9
310	1.9	41.3	47.0	370	-3.5	37.0	44.0	430	-8.9	33.0	41.2	490	-14.2	29.2	38.4	550	-19.2	25.8	35.8
312	1.7	41.2	46.9	372	-3.7	36.8	43.9	432	-9.1	32.9	41.1	492	-14.3	29.1	38.3	552	-19.4	25.7	35.7
314	1.5	41.0	46.8	374	-3.9	36.7	43.8	434	-9.2	32.8	41.0	494	-14.5	29.0	38.2	554	-19.5	25.5	35.7
316	1.3	40.9	46.7	376	-4.0	36.5	43.7	436	-9.4	32.7	40.9	496	-14.7	28.9	38.2	556	-19.7	25.4	35.6
318	1.1	40.7	46.6	378	-4.2	36.4	43.6	438	-9.6	32.5	40.8	498	-14.8	28.8	38.1	558	-19.9	25.3	35.5
320	0.9	40.5	46.5	380	-4.4	36.3	43.5	440	-9.8	32.4	40.7	500	-15.0	28.6	38.0	560	-20.1	25.2	35.4
322	0.7	40.4	46.4	382	-4.6	36.1	43.4	442	-10.0	32.3	40.6	502	-15.2	28.5	37.9	562	-20.2	25.1	35.3
324	0.5	40.2	46.3	384	-4.7	36.0	43.3	444	-10.1	32.1	40.5	504	-15.4	28.4	37.8	564	-20.4	25.0	35.2
326	0.4	40.1	46.2	386	-4.9	35.9	43.2	446	-10.3	32.0	40.4	506	-15.5	28.3	37.7	566	-20.6	24.8	35.1
328	0.2	39.9	46.0	388	-5.1	35.7	43.1	448	-10.5	31.9	40.4	508	-15.7	28.2	37.6	568	-20.7	24.7	35.0
330	0.0	39.7	45.9	390	-5.3	35.6	43.1	450	-10.7	31.7	40.3	510	-15.9	28.1	37.6	570	-20.9	24.6	35.0
332	-0.2	39.6	45.8	392	-5.5	35.5	43.0	452	-10.9	31.6	40.2	512	-16.0	28.0	37.5	572	-21.1	24.5	34.9
334	-0.4	39.4	45.7	394	-5.6	35.4	42.9	454	-11.0	31.5	40.1	514	-16.2	27.8	37.4	574	-21.2	24.4	34.8
336	-0.5	39.3	45.6	396	-5.8	35.2	42.8	456	-11.2	31.3	40.0	516	-16.4	27.7	37.3	576	-21.4	24.3	34.7
338	-0.7	39.2	45.5	398	-6.0	35.1	42.7	458	-11.4	31.2	39.9	518	-16.5	27.6	37.2	578	-21.6	24.2	34.6
340	-0.9	39.0	45.4	400	-6.2	35.0	42.6	460	-11.6	31.1	39.8	520	-16.7	27.5	37.1	580	-21.7	24.1	34.5
342	-1.1	38.9	45.4	402	-6.4	34.9	42.5	462	-11.8	30.9	39.7	522	-16.9	27.4	37.0	582	-21.9	23.9	34.4
344	-1.2	38.8	45.3	404	-6.5	34.7	42.4	464	-11.9	30.8	39.6	524	-17.0	27.3	37.0	584	-22.1	23.8	34.3
346	-1.4	38.6	45.2	406	-6.7	34.6	42.3	466	-12.1	30.7	39.5	526	-17.2	27.2	36.9	586	-22.3	23.7	34.3
348	-1.6	38.5	45.1	408	-6.9	34.5	42.2	468	-12.3	30.6	39.4	528	-17.4	27.0	36.8	588	-22.4	23.6	34.2
350	-1.8	38.3	45.0	410	-7.1	34.3	42.1	470	-12.5	30.4	39.3	530	-17.5	26.9	36.7	590	-22.6	23.5	34.1
352	-1.9	38.2	44.9	412	-7.3	34.2	42.0	472	-12.6	30.3	39.2	532	-17.7	26.8	36.6	592	-22.8	23.4	34.0
354	-2.1	38.1	44.8	414	-7.4	34.1	42.0	474	-12.8	30.2	39.1	534	-17.9	26.7	36.5	594	-22.9	23.3	33.9
356	-2.3	37.9	44.7	416	-7.6	34.0	41.9	476	-13.0	30.0	39.0	536	-18.0	26.6	36.4	596	-23.1	23.2	33.8
358	-2.4	37.8	44.6	418	-7.8	33.8	41.8	478	-13.2	29.9	38.9	538	-18.2	26.5	36.4	598	-23.3	23.1	33.7
																600	-23.5	23.0	33.7

Interference potential of Reference Network 2 for 50 % of the time

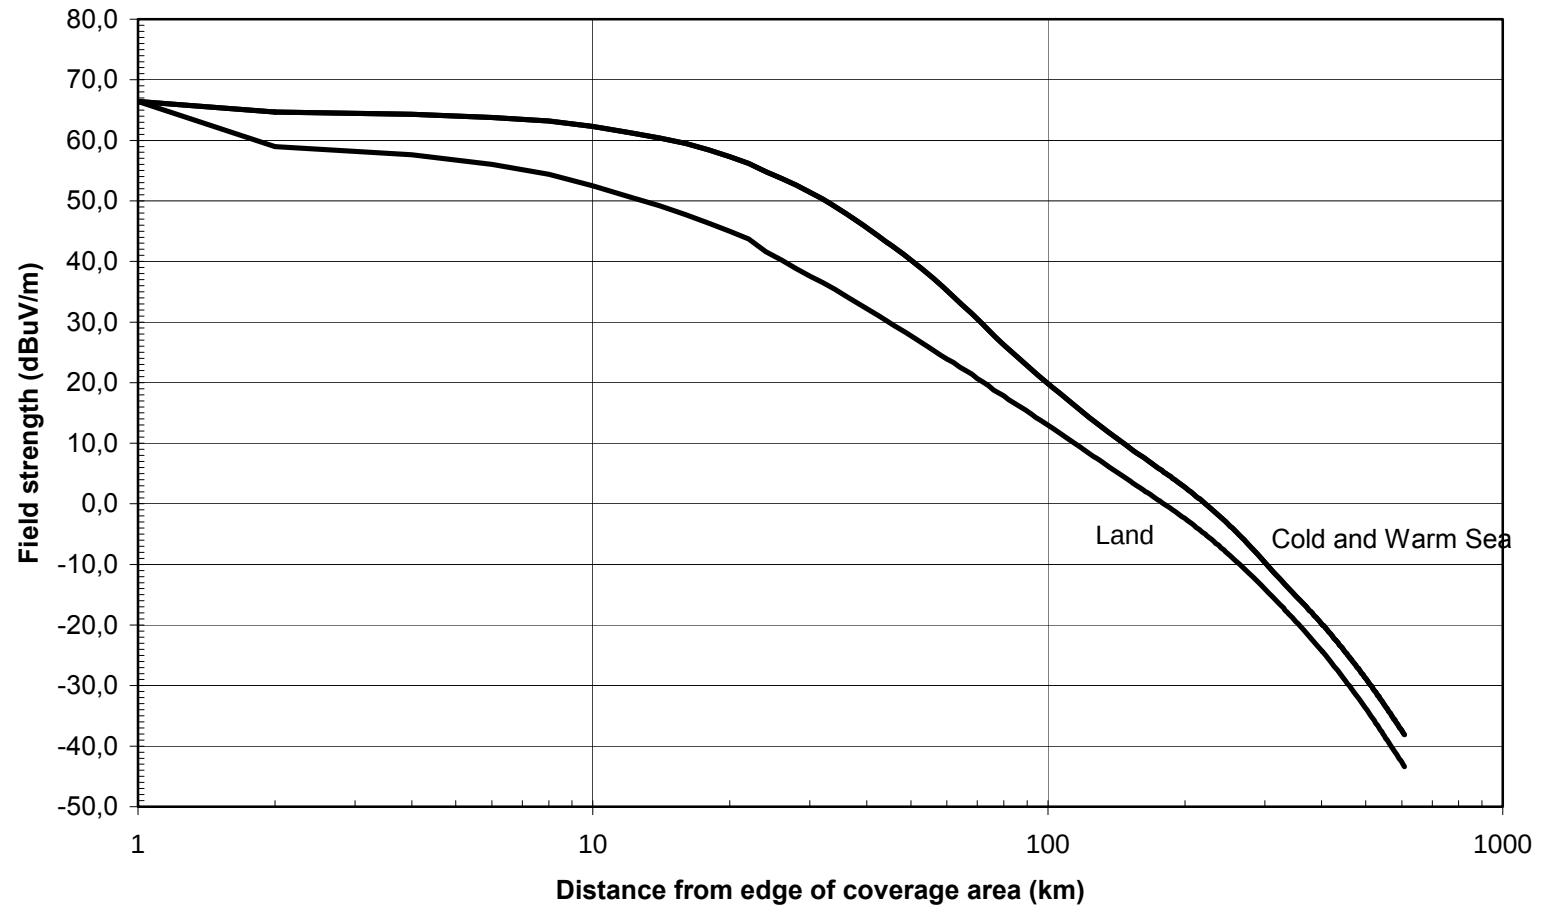


Figure 7a: Interference potential of Reference Network Two for 50 % of time

Table 6a: Tabulated values for the interference potential of Reference Network 2 for 50% of time - (1)

Distance (km)	Land	Cold sea	Warm sea	Distance (km)	Land	Cold sea	Warm sea	Distance (km)	Land	Cold sea	Warm sea	Distance (km)	Land	Cold sea	Warm sea	Distance (km)	Land	Cold sea	Warm sea
0	68.1	68.1	68.1	60	23.9	35.2	35.2	120	8.9	15.0	15.0	180	0.0	5.2	5.2	240	-7.2	-2.2	-2.2
2	59.0	64.7	64.7	62	23.3	34.2	34.2	122	8.6	14.6	14.6	182	-0.3	5.0	5.0	242	-7.4	-2.4	-2.4
4	57.6	64.3	64.3	64	22.6	33.2	33.2	124	8.2	14.1	14.1	184	-0.5	4.7	4.7	244	-7.6	-2.7	-2.7
6	56.0	63.8	63.8	66	22.0	32.3	32.3	126	7.8	13.7	13.7	186	-0.7	4.5	4.5	246	-7.9	-2.9	-2.9
8	54.4	63.2	63.2	68	21.4	31.4	31.4	128	7.5	13.3	13.3	188	-1.0	4.2	4.2	248	-8.1	-3.2	-3.2
10	52.5	62.3	62.3	70	20.7	30.5	30.5	130	7.2	12.9	12.9	190	-1.2	4.0	4.0	250	-8.4	-3.4	-3.4
12	50.7	61.3	61.3	72	20.1	29.6	29.6	132	6.8	12.6	12.6	192	-1.5	3.7	3.7	252	-8.6	-3.7	-3.7
14	49.2	60.4	60.4	74	19.5	28.7	28.7	134	6.5	12.2	12.2	194	-1.7	3.5	3.5	254	-8.8	-3.9	-3.9
16	47.7	59.5	59.5	76	18.8	27.8	27.8	136	6.2	11.8	11.8	196	-2.0	3.2	3.2	256	-9.1	-4.2	-4.2
18	46.3	58.4	58.4	78	18.3	27.0	27.0	138	5.8	11.5	11.5	198	-2.2	3.0	3.0	258	-9.3	-4.4	-4.4
20	45.0	57.3	57.3	80	17.8	26.2	26.2	140	5.5	11.1	11.1	200	-2.4	2.7	2.7	260	-9.5	-4.7	-4.7
22	43.7	56.2	56.2	82	17.2	25.5	25.5	142	5.2	10.8	10.8	202	-2.7	2.5	2.5	262	-9.7	-4.9	-4.9
24	41.6	54.8	54.8	84	16.7	24.8	24.8	144	4.9	10.4	10.4	204	-2.9	2.2	2.2	264	-10.0	-5.2	-5.2
26	40.2	53.7	53.7	86	16.2	24.1	24.1	146	4.6	10.1	10.1	206	-3.1	2.0	2.0	266	-10.2	-5.4	-5.4
28	38.8	52.6	52.6	88	15.8	23.5	23.5	148	4.3	9.8	9.8	208	-3.4	1.7	1.7	268	-10.4	-5.7	-5.7
30	37.6	51.4	51.4	90	15.3	22.8	22.8	150	4.0	9.5	9.5	210	-3.6	1.5	1.5	270	-10.7	-5.9	-5.9
32	36.5	50.3	50.3	92	14.8	22.2	22.2	152	3.7	9.1	9.1	212	-3.9	1.2	1.2	272	-10.9	-6.2	-6.2
34	35.4	49.1	49.1	94	14.3	21.6	21.6	154	3.4	8.8	8.8	214	-4.1	1.0	1.0	274	-11.1	-6.4	-6.4
36	34.3	47.9	47.9	96	13.9	21.0	21.0	156	3.1	8.5	8.5	216	-4.3	0.8	0.8	276	-11.3	-6.7	-6.7
38	33.2	46.7	46.7	98	13.4	20.4	20.4	158	2.8	8.2	8.2	218	-4.6	0.5	0.5	278	-11.6	-6.9	-6.9
40	32.2	45.6	45.6	100	13.0	19.8	19.8	160	2.6	8.0	8.0	220	-4.8	0.3	0.3	280	-11.8	-7.2	-7.2
42	31.3	44.4	44.4	102	12.6	19.3	19.3	162	2.3	7.7	7.7	222	-5.0	0.0	0.0	282	-12.0	-7.4	-7.4
44	30.3	43.3	43.3	104	12.1	18.8	18.8	164	2.0	7.4	7.4	224	-5.3	-0.2	-0.2	284	-12.2	-7.7	-7.7
46	29.4	42.3	42.3	106	11.7	18.3	18.3	166	1.8	7.1	7.1	226	-5.5	-0.5	-0.5	286	-12.5	-7.9	-7.9
48	28.6	41.3	41.3	108	11.3	17.8	17.8	168	1.5	6.8	6.8	228	-5.7	-0.7	-0.7	288	-12.7	-8.2	-8.2
50	27.7	40.2	40.2	110	10.9	17.3	17.3	170	1.3	6.6	6.6	230	-6.0	-1.0	-1.0	290	-12.9	-8.4	-8.4
52	26.9	39.2	39.2	112	10.5	16.8	16.8	172	1.0	6.3	6.3	232	-6.2	-1.2	-1.2	292	-13.1	-8.7	-8.7
54	26.1	38.2	38.2	114	10.1	16.3	16.3	174	0.7	6.0	6.0	234	-6.5	-1.5	-1.5	294	-13.4	-8.9	-8.9
56	25.4	37.2	37.2	116	9.7	15.9	15.9	176	0.5	5.7	5.7	236	-6.7	-1.7	-1.7	296	-13.6	-9.2	-9.2
58	24.6	36.2	36.2	118	9.3	15.4	15.4	178	0.2	5.5	5.5	238	-6.9	-2.0	-2.0	298	-13.8	-9.4	-9.4

Table 6a: Tabulated values for the interference potential of Reference Network 2 for 50% of time - (2)

Distance (km)	Land	Cold sea	Warm sea	Distance (km)	Land	Cold sea	Warm sea	Distance (km)	Land	Cold sea	Warm sea	Distance (km)	Land	Cold sea	Warm sea	Distance (km)	Land	Cold sea	Warm sea
300	-14.0	-9.7	-9.7	360	-20.3	-16.0	-16.0	420	-26.2	-21.6	-21.6	480	-31.9	-27.1	-27.1	540	-37.5	-32.4	-32.4
302	-14.3	-9.9	-9.9	362	-20.5	-16.2	-16.2	422	-26.4	-21.8	-21.8	482	-32.1	-27.2	-27.2	542	-37.6	-32.5	-32.5
304	-14.5	-10.2	-10.2	364	-20.7	-16.4	-16.4	424	-26.6	-22.0	-22.0	484	-32.3	-27.4	-27.4	544	-37.8	-32.7	-32.7
306	-14.7	-10.4	-10.4	366	-20.9	-16.6	-16.6	426	-26.8	-22.2	-22.2	486	-32.5	-27.6	-27.6	546	-38.0	-32.9	-32.9
308	-14.9	-10.6	-10.6	368	-21.1	-16.8	-16.8	428	-27.0	-22.4	-22.4	488	-32.7	-27.8	-27.8	548	-38.2	-33.1	-33.1
310	-15.1	-10.9	-10.9	370	-21.3	-17.0	-17.0	430	-27.2	-22.5	-22.5	490	-32.9	-28.0	-28.0	550	-38.4	-33.2	-33.2
312	-15.3	-11.1	-11.1	372	-21.5	-17.2	-17.2	432	-27.3	-22.7	-22.7	492	-33.0	-28.1	-28.1	552	-38.6	-33.4	-33.4
314	-15.6	-11.3	-11.3	374	-21.7	-17.4	-17.4	434	-27.5	-22.9	-22.9	494	-33.2	-28.3	-28.3	554	-38.8	-33.6	-33.6
316	-15.8	-11.5	-11.5	376	-21.9	-17.6	-17.6	436	-27.7	-23.1	-23.1	496	-33.4	-28.5	-28.5	556	-38.9	-33.8	-33.8
318	-16.0	-11.8	-11.8	378	-22.1	-17.7	-17.7	438	-27.9	-23.3	-23.3	498	-33.6	-28.7	-28.7	558	-39.1	-33.9	-33.9
320	-16.2	-12.0	-12.0	380	-22.3	-17.9	-17.9	440	-28.1	-23.5	-23.5	500	-33.8	-28.8	-28.8	560	-39.3	-34.1	-34.1
322	-16.4	-12.2	-12.2	382	-22.5	-18.1	-18.1	442	-28.3	-23.6	-23.6	502	-34.0	-29.0	-29.0	562	-39.5	-34.3	-34.3
324	-16.6	-12.4	-12.4	384	-22.7	-18.3	-18.3	444	-28.5	-23.8	-23.8	504	-34.1	-29.2	-29.2	564	-39.6	-34.4	-34.4
326	-16.8	-12.6	-12.6	386	-22.9	-18.5	-18.5	446	-28.7	-24.0	-24.0	506	-34.3	-29.4	-29.4	566	-39.8	-34.6	-34.6
328	-17.0	-12.8	-12.8	388	-23.1	-18.7	-18.7	448	-28.9	-24.2	-24.2	508	-34.5	-29.5	-29.5	568	-40.0	-34.8	-34.8
330	-17.2	-13.1	-13.1	390	-23.3	-18.9	-18.9	450	-29.1	-24.4	-24.4	510	-34.7	-29.7	-29.7	570	-40.1	-35.0	-35.0
332	-17.5	-13.3	-13.3	392	-23.5	-19.0	-19.0	452	-29.3	-24.6	-24.6	512	-34.9	-29.9	-29.9	572	-40.3	-35.1	-35.1
334	-17.7	-13.5	-13.5	394	-23.7	-19.2	-19.2	454	-29.5	-24.7	-24.7	514	-35.1	-30.1	-30.1	574	-40.5	-35.3	-35.3
336	-17.9	-13.7	-13.7	396	-23.9	-19.4	-19.4	456	-29.7	-24.9	-24.9	516	-35.3	-30.2	-30.2	576	-40.7	-35.5	-35.5
338	-18.1	-13.9	-13.9	398	-24.0	-19.6	-19.6	458	-29.9	-25.1	-25.1	518	-35.4	-30.4	-30.4	578	-40.8	-35.6	-35.6
340	-18.3	-14.1	-14.1	400	-24.2	-19.8	-19.8	460	-30.0	-25.3	-25.3	520	-35.6	-30.6	-30.6	580	-41.0	-35.8	-35.8
342	-18.5	-14.3	-14.3	402	-24.4	-20.0	-20.0	462	-30.2	-25.5	-25.5	522	-35.8	-30.8	-30.8	582	-41.2	-36.0	-36.0
344	-18.7	-14.5	-14.5	404	-24.6	-20.1	-20.1	464	-30.4	-25.6	-25.6	524	-36.0	-31.0	-31.0	584	-41.3	-36.1	-36.1
346	-18.9	-14.7	-14.7	406	-24.8	-20.3	-20.3	466	-30.6	-25.8	-25.8	526	-36.2	-31.1	-31.1	586	-41.5	-36.3	-36.3
348	-19.1	-14.9	-14.9	408	-25.0	-20.5	-20.5	468	-30.8	-26.0	-26.0	528	-36.4	-31.3	-31.3	588	-41.7	-36.5	-36.5
350	-19.3	-15.1	-15.1	410	-25.2	-20.7	-20.7	470	-31.0	-26.2	-26.2	530	-36.5	-31.5	-31.5	590	-41.8	-36.6	-36.6
352	-19.5	-15.3	-15.3	412	-25.4	-20.9	-20.9	472	-31.2	-26.4	-26.4	532	-36.7	-31.7	-31.7	592	-42.0	-36.8	-36.8
354	-19.7	-15.5	-15.5	414	-25.6	-21.1	-21.1	474	-31.4	-26.5	-26.5	534	-36.9	-31.8	-31.8	594	-42.2	-37.0	-37.0
356	-19.9	-15.7	-15.7	416	-25.8	-21.3	-21.3	476	-31.6	-26.7	-26.7	536	-37.1	-32.0	-32.0	596	-42.3	-37.1	-37.1
358	-20.1	-15.9	-15.9	418	-26.0	-21.4	-21.4	478	-31.7	-26.9	-26.9	538	-37.3	-32.2	-32.2	598	-42.5	-37.3	-37.3
																600	-42.7	-37.5	-37.5

Interference potential of Reference Network 2 for 1% of the time

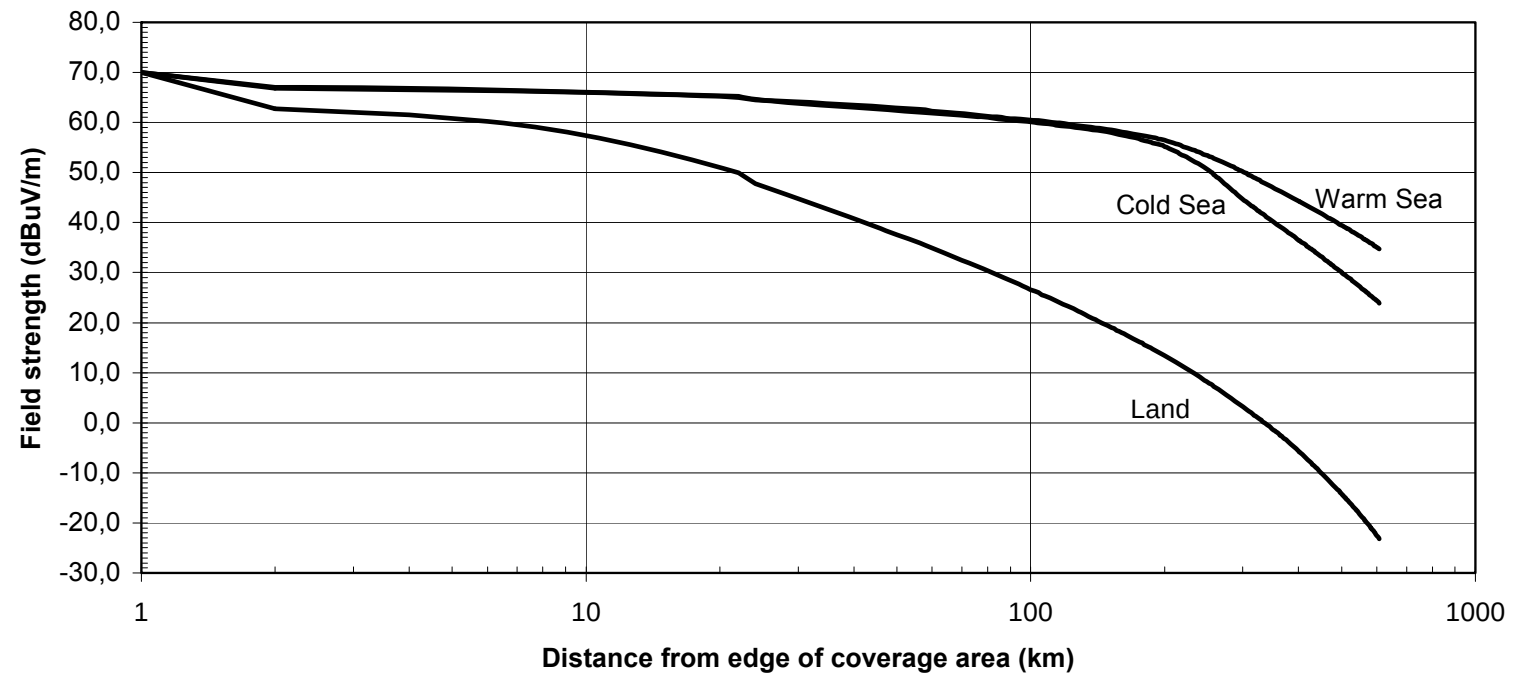


Figure 7b: Interference potential of Reference Network Two for 1% of time

Table 6b: Tabulated values for the interference potential of Reference Network 2 for 1% of time - (1)

Distance (km)	Land	Cold sea	Warm sea	Distance (km)	Land	Cold sea	Warm sea	Distance (km)	Land	Cold sea	Warm sea	Distance (km)	Land	Cold sea	Warm sea	Distance (km)	Land	Cold sea	Warm sea
0	72.5	72.5	72.5	60	34.9	61.9	62.3	120	23.4	59.3	59.7	180	15.6	56.4	57.3	240	9.1	51.6	54.0
2	62.7	66.8	67.0	62	34.4	61.8	62.2	122	23.2	59.2	59.6	182	15.4	56.3	57.2	242	8.9	51.4	53.9
4	61.5	66.6	66.8	64	33.9	61.7	62.1	124	22.9	59.1	59.5	184	15.2	56.2	57.2	244	8.7	51.2	53.7
6	60.2	66.4	66.6	66	33.4	61.6	62.0	126	22.6	59.0	59.5	186	15.0	56.1	57.1	246	8.5	51.0	53.6
8	58.8	66.2	66.3	68	32.9	61.5	61.9	128	22.3	58.9	59.4	188	14.7	55.9	57.0	248	8.3	50.8	53.5
10	57.4	66.0	66.1	70	32.5	61.4	61.8	130	22.0	58.9	59.3	190	14.5	55.8	56.9	250	8.1	50.6	53.4
12	56.0	65.8	65.9	72	32.1	61.3	61.7	132	21.7	58.8	59.2	192	14.3	55.7	56.8	252	7.9	50.4	53.2
14	54.6	65.6	65.7	74	31.6	61.2	61.6	134	21.4	58.7	59.2	194	14.1	55.6	56.7	254	7.7	50.1	53.1
16	53.3	65.5	65.5	76	31.2	61.1	61.4	136	21.1	58.6	59.1	196	13.9	55.5	56.7	256	7.5	49.9	53.0
18	52.1	65.3	65.4	78	30.8	61.1	61.3	138	20.9	58.5	59.0	198	13.6	55.4	56.6	258	7.3	49.6	52.8
20	51.0	65.2	65.3	80	30.4	61.0	61.2	140	20.6	58.5	58.9	200	13.4	55.2	56.5	260	7.1	49.4	52.7
22	49.9	65.0	65.2	82	30.0	60.9	61.1	142	20.3	58.4	58.9	202	13.2	55.1	56.4	262	6.9	49.1	52.6
24	47.8	64.5	64.6	84	29.6	60.8	61.1	144	20.0	58.3	58.8	204	13.0	54.9	56.2	264	6.7	48.9	52.5
26	46.7	64.3	64.4	86	29.2	60.7	61.0	146	19.8	58.2	58.7	206	12.8	54.7	56.1	266	6.5	48.6	52.3
28	45.7	64.0	64.2	88	28.8	60.6	60.9	148	19.5	58.2	58.6	208	12.5	54.5	56.0	268	6.3	48.4	52.2
30	44.8	63.8	64.1	90	28.4	60.5	60.8	150	19.3	58.1	58.6	210	12.3	54.3	55.9	270	6.1	48.1	52.1
32	43.9	63.6	64.0	92	28.1	60.4	60.8	152	19.0	58.0	58.5	212	12.1	54.2	55.7	272	5.9	47.9	52.0
34	43.1	63.5	63.8	94	27.7	60.3	60.7	154	18.8	57.9	58.4	214	11.9	54.0	55.6	274	5.7	47.6	51.8
36	42.3	63.3	63.7	96	27.3	60.3	60.7	156	18.5	57.7	58.3	216	11.7	53.8	55.5	276	5.5	47.4	51.7
38	41.5	63.2	63.6	98	27.0	60.2	60.6	158	18.3	57.6	58.2	218	11.5	53.6	55.4	278	5.3	47.1	51.6
40	40.8	63.0	63.5	100	26.6	60.1	60.5	160	18.0	57.5	58.1	220	11.3	53.4	55.2	280	5.1	46.9	51.4
42	40.1	62.9	63.4	102	26.3	60.0	60.4	162	17.8	57.4	58.1	222	11.0	53.3	55.1	282	4.9	46.7	51.3
44	39.4	62.8	63.3	104	26.0	59.9	60.4	164	17.5	57.3	58.0	224	10.8	53.1	55.0	284	4.7	46.4	51.2
46	38.8	62.6	63.2	106	25.6	59.8	60.3	166	17.3	57.2	57.9	226	10.6	52.9	54.9	286	4.5	46.2	51.1
48	38.1	62.5	63.0	108	25.3	59.7	60.2	168	17.0	57.1	57.8	228	10.4	52.7	54.7	288	4.3	46.0	50.9
50	37.6	62.4	62.9	110	25.0	59.7	60.1	170	16.8	57.0	57.7	230	10.2	52.5	54.6	290	4.1	45.7	50.8
52	37.0	62.3	62.8	112	24.7	59.6	60.0	172	16.6	56.9	57.6	232	10.0	52.3	54.5	292	3.9	45.5	50.7
54	36.5	62.2	62.7	114	24.4	59.5	59.9	174	16.3	56.8	57.6	234	9.8	52.1	54.4	294	3.8	45.3	50.5
56	36.0	62.1	62.6	116	24.0	59.4	59.9	176	16.1	56.7	57.5	236	9.6	52.0	54.2	296	3.6	45.1	50.4
58	35.5	62.0	62.5	118	23.7	59.3	59.8	178	15.9	56.5	57.4	238	9.4	51.8	54.1	298	3.4	44.8	50.3

Table 6b: Tabulated values for the interference potential of Reference Network 2 for 1% of time - (2)

Distance (km)	Land	Cold sea	Warm sea	Distance (km)	Land	Cold sea	Warm sea	Distance (km)	Land	Cold sea	Warm sea	Distance (km)	Land	Cold sea	Warm sea	Distance (km)	Land	Cold sea	Warm sea
300	3.2	44.6	50.2	360	-2.1	39.5	46.5	420	-7.4	35.2	43.3	480	-12.6	31.3	40.4	540	-17.5	27.7	37.7
302	3.0	44.4	50.0	362	-2.3	39.3	46.4	422	-7.6	35.1	43.2	482	-12.7	31.1	40.3	542	-17.6	27.6	37.6
304	2.8	44.2	49.9	364	-2.5	39.2	46.2	424	-7.7	34.9	43.1	484	-12.9	31.0	40.2	544	-17.8	27.5	37.5
306	2.6	44.1	49.8	366	-2.6	39.0	46.1	426	-7.9	34.8	43.0	486	-13.0	30.9	40.1	546	-18.0	27.4	37.4
308	2.4	43.9	49.6	368	-2.8	38.9	46.0	428	-8.1	34.7	42.9	488	-13.2	30.8	40.0	548	-18.1	27.3	37.4
310	2.3	43.7	49.5	370	-3.0	38.7	45.9	430	-8.3	34.5	42.8	490	-13.4	30.7	39.9	550	-18.3	27.2	37.3
312	2.1	43.5	49.4	372	-3.2	38.6	45.8	432	-8.4	34.4	42.7	492	-13.5	30.5	39.8	552	-18.5	27.1	37.2
314	1.9	43.3	49.3	374	-3.3	38.4	45.7	434	-8.6	34.3	42.6	494	-13.7	30.4	39.7	554	-18.6	26.9	37.1
316	1.7	43.2	49.1	376	-3.5	38.3	45.6	436	-8.8	34.1	42.5	496	-13.9	30.3	39.6	556	-18.8	26.8	37.0
318	1.5	43.0	49.0	378	-3.7	38.1	45.5	438	-9.0	34.0	42.4	498	-14.0	30.2	39.5	558	-19.0	26.7	36.9
320	1.4	42.8	48.9	380	-3.9	38.0	45.4	440	-9.1	33.9	42.3	500	-14.2	30.0	39.5	560	-19.1	26.6	36.8
322	1.2	42.6	48.7	382	-4.0	37.8	45.3	442	-9.3	33.7	42.2	502	-14.4	29.9	39.4	562	-19.3	26.5	36.7
324	1.0	42.4	48.6	384	-4.2	37.7	45.2	444	-9.5	33.6	42.1	504	-14.5	29.8	39.3	564	-19.5	26.4	36.6
326	0.8	42.3	48.5	386	-4.4	37.6	45.0	446	-9.7	33.5	42.0	506	-14.7	29.7	39.2	566	-19.6	26.3	36.6
328	0.7	42.1	48.4	388	-4.6	37.4	44.9	448	-9.8	33.3	41.9	508	-14.9	29.6	39.1	568	-19.8	26.1	36.5
330	0.5	41.9	48.2	390	-4.7	37.3	44.8	450	-10.0	33.2	41.8	510	-15.0	29.5	39.0	570	-20.0	26.0	36.4
332	0.3	41.8	48.1	392	-4.9	37.1	44.7	452	-10.2	33.1	41.7	512	-15.2	29.4	38.9	572	-20.1	25.9	36.3
334	0.1	41.6	48.0	394	-5.1	37.0	44.6	454	-10.4	32.9	41.6	514	-15.3	29.2	38.8	574	-20.3	25.8	36.2
336	0.0	41.4	47.9	396	-5.3	36.8	44.5	456	-10.5	32.8	41.5	516	-15.5	29.1	38.8	576	-20.5	25.7	36.1
338	-0.2	41.2	47.7	398	-5.4	36.7	44.4	458	-10.7	32.7	41.4	518	-15.7	29.0	38.7	578	-20.6	25.6	36.0
340	-0.4	41.1	47.6	400	-5.6	36.5	44.3	460	-10.9	32.5	41.3	520	-15.8	28.9	38.6	580	-20.8	25.5	35.9
342	-0.6	40.9	47.5	402	-5.8	36.4	44.2	462	-11.0	32.4	41.2	522	-16.0	28.8	38.5	582	-21.0	25.4	35.9
344	-0.7	40.7	47.4	404	-6.0	36.3	44.1	464	-11.2	32.3	41.1	524	-16.2	28.7	38.4	584	-21.1	25.3	35.8
346	-0.9	40.6	47.3	406	-6.1	36.1	44.0	466	-11.4	32.2	41.0	526	-16.3	28.6	38.3	586	-21.3	25.1	35.7
348	-1.1	40.4	47.1	408	-6.3	36.0	43.9	468	-11.5	32.0	40.9	528	-16.5	28.4	38.2	588	-21.5	25.0	35.6
350	-1.3	40.2	47.0	410	-6.5	35.9	43.8	470	-11.7	31.9	40.9	530	-16.7	28.3	38.1	590	-21.6	24.9	35.5
352	-1.4	40.1	46.9	412	-6.7	35.7	43.7	472	-11.9	31.8	40.8	532	-16.8	28.2	38.1	592	-21.8	24.8	35.4
354	-1.6	39.9	46.8	414	-6.9	35.6	43.6	474	-12.1	31.6	40.7	534	-17.0	28.1	38.0	594	-22.0	24.7	35.3
356	-1.8	39.8	46.7	416	-7.0	35.5	43.5	476	-12.2	31.5	40.6	536	-17.1	28.0	37.9	596	-22.2	24.6	35.2
358	-1.9	39.6	46.6	418	-7.2	35.3	43.4	478	-12.4	31.4	40.5	538	-17.3	27.9	37.8	598	-22.3	24.5	35.2
																600	-22.5	24.4	35.1

Interference potential of Reference Network 3 for 50% of the time

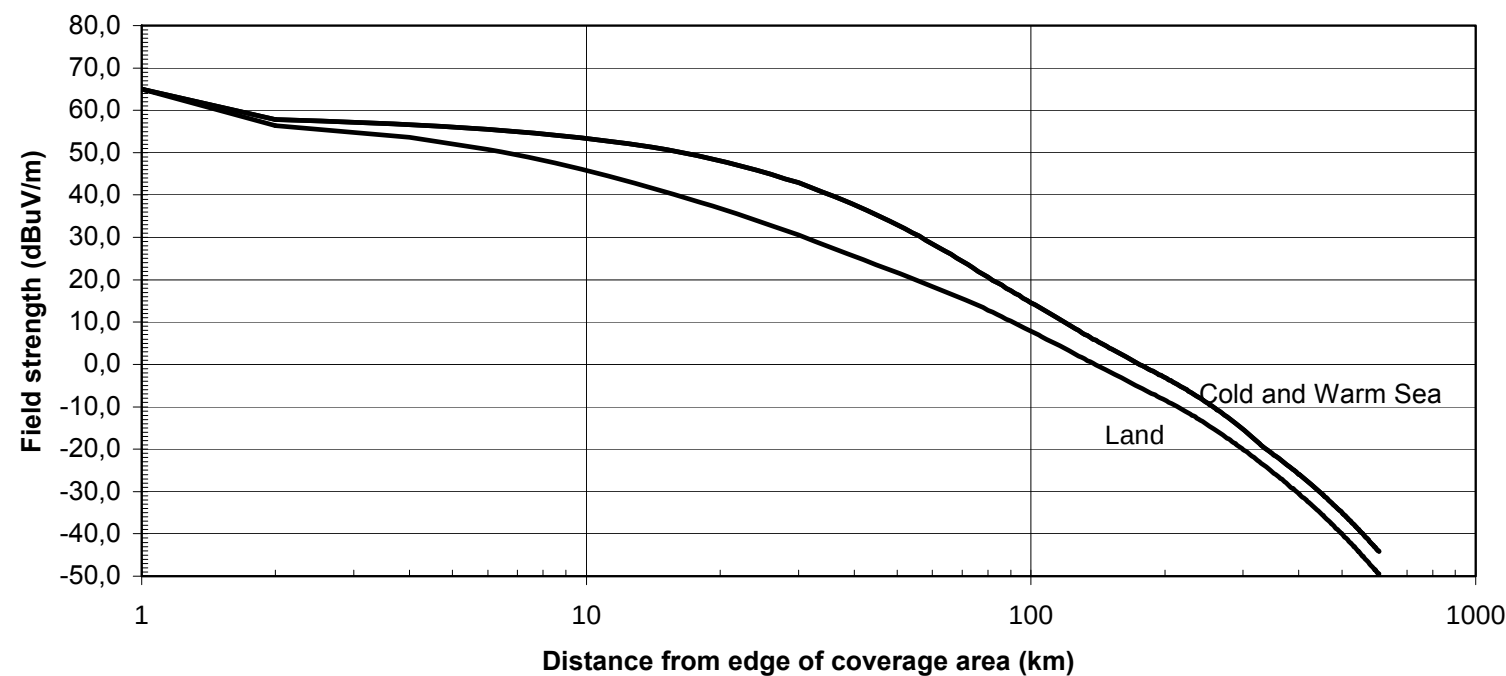


Figure 8a: Interference potential of Reference Network Three for 50 % of time

Table 7a: Tabulated values for the interference potential of Reference Network 3 for 50% of time - (1)

Distance (km)	Land	Cold sea	Warm sea	Distance (km)	Land	Cold sea	Warm sea	Distance (km)	Land	Cold sea	Warm sea	Distance (km)	Land	Cold sea	Warm sea	Distance (km)	Land	Cold sea	Warm sea
0	70.4	70.4	70.4	60	18.4	28.5	28.5	120	3.6	9.7	9.7	180	-6.0	-0.6	-0.6	240	-13.1	-8.0	-8.0
2	56.4	57.8	57.8	62	17.8	27.6	27.6	122	3.2	9.3	9.3	182	-6.3	-0.9	-0.9	242	-13.4	-8.2	-8.2
4	53.6	56.6	56.6	64	17.2	26.8	26.8	124	2.8	8.8	8.8	184	-6.5	-1.1	-1.1	244	-13.6	-8.5	-8.5
6	50.8	55.5	55.5	66	16.7	26.0	26.0	126	2.4	8.4	8.4	186	-6.8	-1.4	-1.4	246	-13.8	-8.7	-8.7
8	48.2	54.4	54.4	68	16.1	25.2	25.2	128	2.0	8.0	8.0	188	-7.0	-1.6	-1.6	248	-14.1	-9.0	-9.0
10	45.8	53.4	53.4	70	15.6	24.4	24.4	130	1.7	7.5	7.5	190	-7.2	-1.9	-1.9	250	-14.3	-9.2	-9.2
12	43.6	52.3	52.3	72	15.0	23.6	23.6	132	1.3	7.1	7.1	192	-7.5	-2.1	-2.1	252	-14.6	-9.5	-9.5
14	41.7	51.3	51.3	74	14.4	22.8	22.8	134	0.9	6.8	6.8	194	-7.7	-2.4	-2.4	254	-14.8	-9.7	-9.7
16	39.9	50.3	50.3	76	13.9	22.0	22.0	136	0.6	6.4	6.4	196	-8.0	-2.6	-2.6	256	-15.0	-9.9	-9.9
18	38.3	49.1	49.1	78	13.4	21.3	21.3	138	0.3	6.0	6.0	198	-8.2	-2.9	-2.9	258	-15.3	-10.2	-10.2
20	36.8	48.1	48.1	80	12.8	20.6	20.6	140	-0.1	5.7	5.7	200	-8.4	-3.1	-3.1	260	-15.5	-10.4	-10.4
22	35.4	47.0	47.0	82	12.3	19.9	19.9	142	-0.4	5.3	5.3	202	-8.7	-3.3	-3.3	262	-15.7	-10.7	-10.7
24	34.1	45.9	45.9	84	11.8	19.3	19.3	144	-0.7	5.0	5.0	204	-8.9	-3.6	-3.6	264	-16.0	-10.9	-10.9
26	32.8	44.9	44.9	86	11.3	18.7	18.7	146	-1.1	4.6	4.6	206	-9.1	-3.8	-3.8	266	-16.2	-11.2	-11.2
28	31.7	43.8	43.8	88	10.7	18.0	18.0	148	-1.4	4.3	4.3	208	-9.4	-4.1	-4.1	268	-16.4	-11.4	-11.4
30	30.6	42.9	42.9	90	10.2	17.4	17.4	150	-1.7	3.9	3.9	210	-9.6	-4.3	-4.3	270	-16.7	-11.7	-11.7
32	29.5	41.8	41.8	92	9.7	16.8	16.8	152	-2.0	3.6	3.6	212	-9.8	-4.6	-4.6	272	-16.9	-11.9	-11.9
34	28.4	40.7	40.7	94	9.3	16.3	16.3	154	-2.3	3.3	3.3	214	-10.1	-4.8	-4.8	274	-17.1	-12.1	-12.1
36	27.4	39.7	39.7	96	8.8	15.7	15.7	156	-2.6	3.0	3.0	216	-10.3	-5.1	-5.1	276	-17.4	-12.4	-12.4
38	26.5	38.7	38.7	98	8.3	15.1	15.1	158	-2.9	2.7	2.7	218	-10.5	-5.3	-5.3	278	-17.6	-12.6	-12.6
40	25.5	37.7	37.7	100	7.8	14.6	14.6	160	-3.2	2.3	2.3	220	-10.8	-5.5	-5.5	280	-17.8	-12.9	-12.9
42	24.7	36.7	36.7	102	7.4	14.1	14.1	162	-3.5	2.0	2.0	222	-11.0	-5.8	-5.8	282	-18.1	-13.1	-13.1
44	23.9	35.8	35.8	104	6.9	13.6	13.6	164	-3.8	1.7	1.7	224	-11.3	-6.0	-6.0	284	-18.3	-13.4	-13.4
46	23.1	34.9	34.9	106	6.5	13.1	13.1	166	-4.1	1.4	1.4	226	-11.5	-6.3	-6.3	286	-18.5	-13.6	-13.6
48	22.4	33.9	33.9	108	6.0	12.6	12.6	168	-4.4	1.1	1.1	228	-11.7	-6.5	-6.5	288	-18.7	-13.9	-13.9
50	21.7	33.0	33.0	110	5.6	12.1	12.1	170	-4.7	0.8	0.8	230	-12.0	-6.8	-6.8	290	-19.0	-14.1	-14.1
52	21.0	32.1	32.1	112	5.2	11.6	11.6	172	-4.9	0.5	0.5	232	-12.2	-7.0	-7.0	292	-19.2	-14.4	-14.4
54	20.3	31.1	31.1	114	4.8	11.1	11.1	174	-5.2	0.2	0.2	234	-12.4	-7.3	-7.3	294	-19.4	-14.6	-14.6
56	19.6	30.3	30.3	116	4.4	10.6	10.6	176	-5.5	-0.1	-0.1	236	-12.7	-7.5	-7.5	296	-19.6	-14.9	-14.9
58	19.0	29.3	29.3	118	4.0	10.2	10.2	178	-5.8	-0.3	-0.3	238	-12.9	-7.7	-7.7	298	-19.9	-15.1	-15.1

Table 7a: Tabulated values for the interference potential of Reference Network 3 for 50% of time - (2)

Distance (km)	Land	Cold sea	Warm sea	Distance (km)	Land	Cold sea	Warm sea	Distance (km)	Land	Cold sea	Warm sea	Distance (km)	Land	Cold sea	Warm sea	Distance (km)	Land	Cold sea	Warm sea
300	-20.1	-15.4	-15.4	360	-26.5	-22.1	-22.1	420	-32.4	-27.7	-27.7	480	-38.2	-33.2	-33.2	540	-43.7	-38.5	-38.5
302	-20.3	-15.6	-15.6	362	-26.7	-22.3	-22.3	422	-32.6	-27.9	-27.9	482	-38.4	-33.4	-33.4	542	-43.9	-38.7	-38.7
304	-20.5	-15.9	-15.9	364	-26.9	-22.5	-22.5	424	-32.8	-28.1	-28.1	484	-38.6	-33.6	-33.6	544	-44.1	-38.9	-38.9
306	-20.7	-16.1	-16.1	366	-27.1	-22.7	-22.7	426	-33.0	-28.3	-28.3	486	-38.8	-33.8	-33.8	546	-44.2	-39.0	-39.0
308	-21.0	-16.4	-16.4	368	-27.3	-22.9	-22.9	428	-33.2	-28.5	-28.5	488	-38.9	-33.9	-33.9	548	-44.4	-39.2	-39.2
310	-21.2	-16.6	-16.6	370	-27.5	-23.1	-23.1	430	-33.4	-28.6	-28.6	490	-39.1	-34.1	-34.1	550	-44.6	-39.4	-39.4
312	-21.4	-16.9	-16.9	372	-27.7	-23.3	-23.3	432	-33.6	-28.8	-28.8	492	-39.3	-34.3	-34.3	552	-44.8	-39.6	-39.6
314	-21.6	-17.1	-17.1	374	-27.9	-23.5	-23.5	434	-33.8	-29.0	-29.0	494	-39.5	-34.5	-34.5	554	-45.0	-39.7	-39.7
316	-21.8	-17.4	-17.4	376	-28.2	-23.7	-23.7	436	-34.0	-29.2	-29.2	496	-39.7	-34.6	-34.6	556	-45.2	-39.9	-39.9
318	-22.1	-17.7	-17.7	378	-28.4	-23.9	-23.9	438	-34.2	-29.4	-29.4	498	-39.9	-34.8	-34.8	558	-45.3	-40.1	-40.1
320	-22.3	-17.9	-17.9	380	-28.6	-24.1	-24.1	440	-34.4	-29.6	-29.6	500	-40.0	-35.0	-35.0	560	-45.5	-40.3	-40.3
322	-22.5	-18.2	-18.2	382	-28.8	-24.2	-24.2	442	-34.5	-29.7	-29.7	502	-40.2	-35.2	-35.2	562	-45.7	-40.4	-40.4
324	-22.7	-18.4	-18.4	384	-29.0	-24.4	-24.4	444	-34.7	-29.9	-29.9	504	-40.4	-35.3	-35.3	564	-45.9	-40.6	-40.6
326	-23.0	-18.7	-18.7	386	-29.2	-24.6	-24.6	446	-34.9	-30.1	-30.1	506	-40.6	-35.5	-35.5	566	-46.1	-40.8	-40.8
328	-23.2	-18.9	-18.9	388	-29.3	-24.8	-24.8	448	-35.1	-30.3	-30.3	508	-40.8	-35.7	-35.7	568	-46.3	-41.0	-41.0
330	-23.4	-19.2	-19.2	390	-29.5	-25.0	-25.0	450	-35.3	-30.5	-30.5	510	-41.0	-35.9	-35.9	570	-46.4	-41.1	-41.1
332	-23.6	-19.4	-19.4	392	-29.7	-25.2	-25.2	452	-35.5	-30.7	-30.7	512	-41.1	-36.1	-36.1	572	-46.6	-41.3	-41.3
334	-23.8	-19.6	-19.6	394	-29.9	-25.3	-25.3	454	-35.7	-30.8	-30.8	514	-41.3	-36.2	-36.2	574	-46.8	-41.5	-41.5
336	-24.0	-19.8	-19.8	396	-30.1	-25.5	-25.5	456	-35.9	-31.0	-31.0	516	-41.5	-36.4	-36.4	576	-47.0	-41.7	-41.7
338	-24.2	-20.0	-20.0	398	-30.3	-25.7	-25.7	458	-36.1	-31.2	-31.2	518	-41.7	-36.6	-36.6	578	-47.2	-41.8	-41.8
340	-24.4	-20.2	-20.2	400	-30.5	-25.9	-25.9	460	-36.3	-31.4	-31.4	520	-41.9	-36.8	-36.8	580	-47.4	-42.0	-42.0
342	-24.6	-20.4	-20.4	402	-30.7	-26.1	-26.1	462	-36.5	-31.6	-31.6	522	-42.1	-36.9	-36.9	582	-47.5	-42.2	-42.2
344	-24.9	-20.6	-20.6	404	-30.9	-26.3	-26.3	464	-36.7	-31.8	-31.8	524	-42.2	-37.1	-37.1	584	-47.7	-42.4	-42.4
346	-25.1	-20.8	-20.8	406	-31.1	-26.4	-26.4	466	-36.9	-32.0	-32.0	526	-42.4	-37.3	-37.3	586	-47.9	-42.5	-42.5
348	-25.3	-21.0	-21.0	408	-31.3	-26.6	-26.6	468	-37.0	-32.1	-32.1	528	-42.6	-37.5	-37.5	588	-48.0	-42.7	-42.7
350	-25.5	-21.2	-21.2	410	-31.5	-26.8	-26.8	470	-37.2	-32.3	-32.3	530	-42.8	-37.6	-37.6	590	-48.2	-42.9	-42.9
352	-25.7	-21.4	-21.4	412	-31.7	-27.0	-27.0	472	-37.4	-32.5	-32.5	532	-43.0	-37.8	-37.8	592	-48.4	-43.0	-43.0
354	-25.9	-21.5	-21.5	414	-31.9	-27.2	-27.2	474	-37.6	-32.7	-32.7	534	-43.1	-38.0	-38.0	594	-48.5	-43.2	-43.2
356	-26.1	-21.7	-21.7	416	-32.0	-27.4	-27.4	476	-37.8	-32.9	-32.9	536	-43.3	-38.2	-38.2	596	-48.7	-43.4	-43.4
358	-26.3	-21.9	-21.9	418	-32.2	-27.5	-27.5	478	-38.0	-33.1	-33.1	538	-43.5	-38.3	-38.3	598	-48.9	-43.5	-43.5
																600	-49.0	-43.7	-43.7

Interference potential of Reference Network 3 for 1% of the time

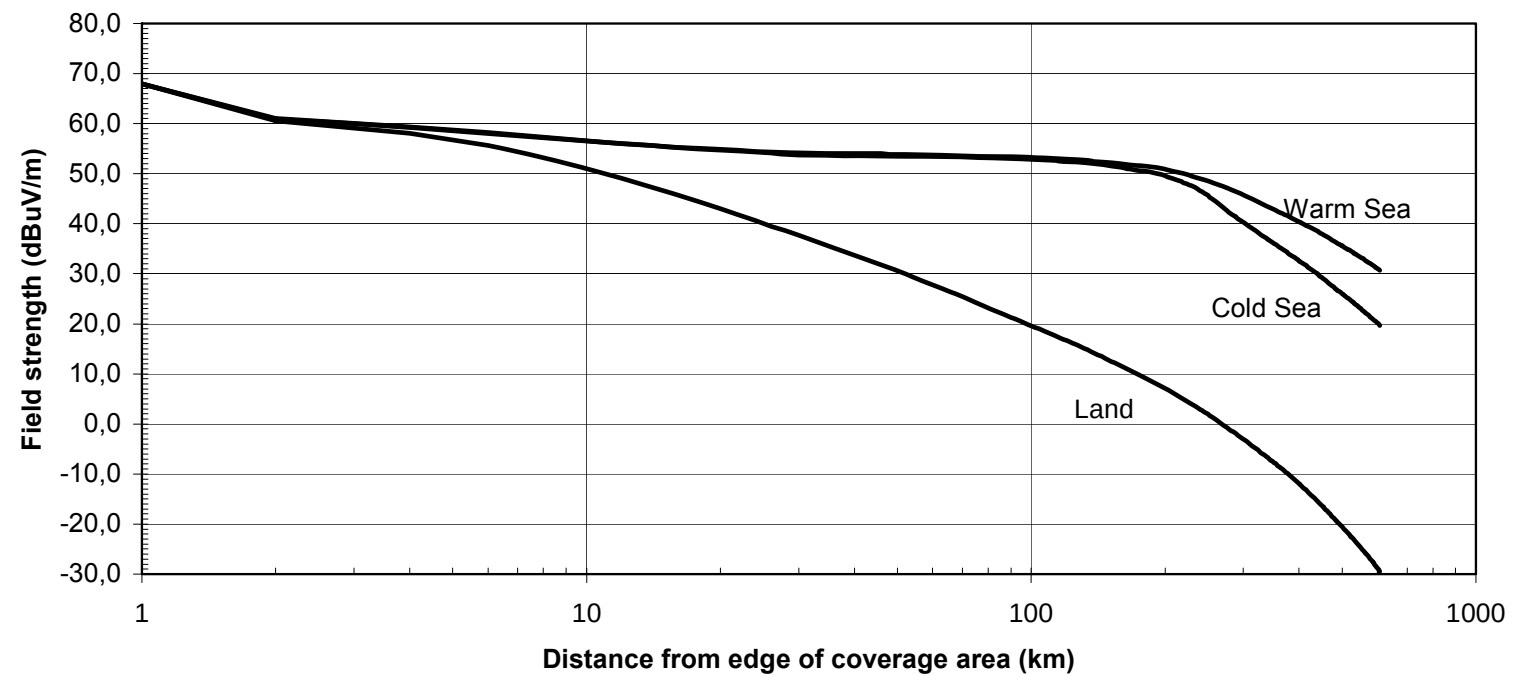


Figure 8b: Interference potential of Reference Network Three for 1% of time

Table 7b: Tabulated values for the interference potential of Reference Network 3 for 1% of time - (1)

Distance (km)	Land	Cold sea	Warm sea	Distance (km)	Land	Cold sea	Warm sea	Distance (km)	Land	Cold sea	Warm sea	Distance (km)	Land	Cold sea	Warm sea	Distance (km)	Land	Cold sea	Warm sea
0	74.4	74.4	74.4	60	27.8	53.5	53.8	120	16.7	52.5	52.9	180	9.2	50.5	51.5	240	2.9	46.6	49.0
2	60.6	60.9	61.0	62	27.3	53.4	53.7	122	16.4	52.4	52.9	182	9.0	50.5	51.5	242	2.7	46.4	48.9
4	58.1	59.2	59.4	64	26.8	53.4	53.7	124	16.1	52.4	52.8	184	8.8	50.4	51.4	244	2.5	46.2	48.8
6	55.6	58.1	58.2	66	26.3	53.4	53.7	126	15.9	52.4	52.8	186	8.6	50.3	51.4	246	2.3	46.0	48.7
8	53.2	57.2	57.3	68	25.9	53.4	53.7	128	15.6	52.3	52.8	188	8.4	50.2	51.3	248	2.1	45.8	48.6
10	51.0	56.5	56.6	70	25.4	53.3	53.6	130	15.3	52.3	52.7	190	8.1	50.1	51.2	250	1.9	45.6	48.5
12	49.1	56.0	56.0	72	25.0	53.3	53.6	132	15.1	52.2	52.7	192	7.9	50.0	51.2	252	1.7	45.3	48.4
14	47.3	55.6	55.6	74	24.5	53.3	53.5	134	14.8	52.2	52.6	194	7.7	49.9	51.1	254	1.5	45.1	48.3
16	45.7	55.2	55.3	76	24.0	53.2	53.5	136	14.5	52.1	52.6	196	7.5	49.8	51.1	256	1.3	44.9	48.2
18	44.3	55.0	55.1	78	23.6	53.2	53.5	138	14.2	52.0	52.5	198	7.3	49.7	51.0	258	1.1	44.7	48.1
20	43.0	54.7	54.9	80	23.2	53.2	53.5	140	14.0	52.0	52.5	200	7.1	49.6	50.9	260	0.9	44.4	48.0
22	41.7	54.5	54.7	82	22.8	53.1	53.5	142	13.7	51.9	52.4	202	6.9	49.4	50.8	262	0.7	44.2	47.9
24	40.6	54.3	54.4	84	22.4	53.1	53.4	144	13.5	51.8	52.4	204	6.7	49.3	50.7	264	0.4	44.0	47.8
26	39.5	54.1	54.3	86	22.0	53.1	53.4	146	13.2	51.8	52.3	206	6.4	49.2	50.6	266	0.2	43.7	47.7
28	38.6	53.9	54.2	88	21.7	53.0	53.4	148	12.9	51.7	52.3	208	6.2	49.0	50.5	268	0.0	43.5	47.6
30	37.7	53.8	54.1	90	21.3	53.0	53.4	150	12.7	51.6	52.2	210	6.0	48.9	50.4	270	-0.2	43.3	47.4
32	36.8	53.7	54.1	92	21.0	53.0	53.4	152	12.4	51.5	52.2	212	5.8	48.8	50.4	272	-0.4	43.0	47.3
34	36.0	53.7	54.0	94	20.6	53.0	53.4	154	12.2	51.4	52.1	214	5.6	48.6	50.3	274	-0.6	42.8	47.2
36	35.2	53.7	54.0	96	20.3	52.9	53.3	156	11.9	51.4	52.1	216	5.4	48.5	50.2	276	-0.8	42.6	47.1
38	34.4	53.6	54.0	98	19.9	52.9	53.3	158	11.7	51.3	52.0	218	5.2	48.4	50.1	278	-1.0	42.3	47.0
40	33.7	53.6	54.0	100	19.6	52.8	53.3	160	11.5	51.2	52.0	220	4.9	48.2	50.0	280	-1.2	42.1	46.9
42	33.0	53.6	54.0	102	19.3	52.8	53.2	162	11.2	51.1	51.9	222	4.7	48.1	49.9	282	-1.4	41.9	46.8
44	32.4	53.6	54.0	104	19.0	52.8	53.2	164	11.0	51.0	51.8	224	4.5	48.0	49.8	284	-1.5	41.7	46.7
46	31.8	53.6	54.0	106	18.7	52.7	53.2	166	10.8	51.0	51.8	226	4.3	47.8	49.7	286	-1.7	41.5	46.6
48	31.2	53.5	53.9	108	18.4	52.7	53.1	168	10.5	50.9	51.7	228	4.1	47.7	49.6	288	-1.9	41.4	46.5
50	30.6	53.5	53.9	110	18.1	52.7	53.1	170	10.3	50.8	51.7	230	3.9	47.5	49.5	290	-2.1	41.2	46.3
52	30.0	53.5	53.9	112	17.8	52.6	53.0	172	10.1	50.7	51.6	232	3.7	47.4	49.4	292	-2.3	41.0	46.2
54	29.4	53.5	53.9	114	17.5	52.6	53.0	174	9.9	50.7	51.6	234	3.5	47.2	49.3	294	-2.5	40.8	46.1
56	28.8	53.5	53.8	116	17.2	52.5	53.0	176	9.7	50.6	51.6	236	3.3	47.0	49.2	296	-2.7	40.6	46.0
58	28.3	53.5	53.8	118	16.9	52.5	52.9	178	9.4	50.6	51.5	238	3.1	46.8	49.1	298	-2.9	40.4	45.9

Table 7b: Tabulated values for the interference potential of Reference Network 3 for 1% of time - (2)

Distance (km)	Land	Cold sea	Warm sea	Distance (km)	Land	Cold sea	Warm sea	Distance (km)	Land	Cold sea	Warm sea	Distance (km)	Land	Cold sea	Warm sea	Distance (km)	Land	Cold sea	Warm sea
300	-3.0	40.3	45.8	360	-8.5	35.4	42.4	420	-13.7	31.3	39.5	480	-18.9	27.2	36.5	540	-23.8	23.7	33.8
302	-3.2	40.1	45.6	362	-8.6	35.3	42.3	422	-13.8	31.2	39.4	482	-19.1	27.1	36.4	542	-24.0	23.6	33.7
304	-3.4	39.9	45.5	364	-8.8	35.2	42.2	424	-14.0	31.0	39.3	484	-19.3	27.0	36.3	544	-24.1	23.4	33.6
306	-3.6	39.7	45.4	366	-9.0	35.0	42.1	426	-14.2	30.9	39.2	486	-19.4	26.9	36.2	546	-24.3	23.3	33.5
308	-3.8	39.6	45.3	368	-9.1	34.9	42.0	428	-14.4	30.8	39.1	488	-19.6	26.7	36.1	548	-24.5	23.2	33.4
310	-4.0	39.4	45.2	370	-9.3	34.7	41.9	430	-14.5	30.6	39.0	490	-19.7	26.6	36.0	550	-24.6	23.1	33.3
312	-4.2	39.2	45.1	372	-9.5	34.6	41.8	432	-14.7	30.5	38.9	492	-19.9	26.5	35.9	552	-24.8	23.0	33.2
314	-4.4	39.1	44.9	374	-9.7	34.4	41.7	434	-14.9	30.4	38.8	494	-20.1	26.4	35.8	554	-25.0	22.8	33.1
316	-4.6	38.9	44.8	376	-9.8	34.3	41.6	436	-15.1	30.2	38.7	496	-20.2	26.3	35.7	556	-25.1	22.7	33.1
318	-4.7	38.7	44.7	378	-10.0	34.1	41.5	438	-15.2	30.1	38.6	498	-20.4	26.1	35.6	558	-25.3	22.6	33.0
320	-4.9	38.5	44.6	380	-10.2	34.0	41.4	440	-15.4	30.0	38.5	500	-20.6	26.0	35.6	560	-25.4	22.5	32.9
322	-5.1	38.4	44.5	382	-10.3	33.8	41.3	442	-15.6	29.8	38.4	502	-20.7	25.9	35.5	562	-25.6	22.4	32.8
324	-5.3	38.2	44.3	384	-10.5	33.7	41.2	444	-15.8	29.7	38.3	504	-20.9	25.8	35.4	564	-25.8	22.2	32.7
326	-5.5	38.0	44.2	386	-10.7	33.6	41.1	446	-15.9	29.5	38.2	506	-21.0	25.7	35.3	566	-25.9	22.1	32.6
328	-5.7	37.8	44.1	388	-10.9	33.4	41.0	448	-16.1	29.4	38.1	508	-21.2	25.6	35.2	568	-26.1	22.0	32.5
330	-5.9	37.7	44.0	390	-11.0	33.3	40.9	450	-16.3	29.3	38.0	510	-21.4	25.4	35.1	570	-26.3	21.9	32.4
332	-6.0	37.5	43.9	392	-11.2	33.2	40.8	452	-16.5	29.1	37.9	512	-21.5	25.3	35.0	572	-26.4	21.8	32.3
334	-6.2	37.4	43.8	394	-11.4	33.0	40.7	454	-16.6	29.0	37.8	514	-21.7	25.2	34.9	574	-26.6	21.6	32.2
336	-6.4	37.2	43.7	396	-11.6	32.9	40.6	456	-16.8	28.9	37.7	516	-21.9	25.1	34.9	576	-26.7	21.5	32.1
338	-6.6	37.1	43.6	398	-11.7	32.8	40.5	458	-17.0	28.7	37.6	518	-22.0	25.0	34.8	578	-26.9	21.4	32.1
340	-6.7	36.9	43.4	400	-11.9	32.6	40.4	460	-17.2	28.6	37.5	520	-22.2	24.9	34.7	580	-27.1	21.3	32.0
342	-6.9	36.8	43.3	402	-12.1	32.5	40.3	462	-17.3	28.5	37.4	522	-22.4	24.7	34.6	582	-27.2	21.2	31.9
344	-7.1	36.6	43.2	404	-12.3	32.4	40.2	464	-17.5	28.3	37.3	524	-22.5	24.6	34.5	584	-27.4	21.1	31.8
346	-7.3	36.5	43.1	406	-12.4	32.2	40.1	466	-17.7	28.2	37.2	526	-22.7	24.5	34.4	586	-27.6	21.0	31.7
348	-7.4	36.3	43.0	408	-12.6	32.1	40.0	468	-17.9	28.0	37.1	528	-22.8	24.4	34.3	588	-27.7	20.8	31.6
350	-7.6	36.2	42.9	410	-12.8	32.0	39.9	470	-18.0	27.9	37.0	530	-23.0	24.3	34.2	590	-27.9	20.7	31.5
352	-7.8	36.0	42.8	412	-13.0	31.8	39.8	472	-18.2	27.8	36.9	532	-23.2	24.1	34.1	592	-28.1	20.6	31.4
354	-7.9	35.9	42.7	414	-13.1	31.7	39.7	474	-18.4	27.6	36.8	534	-23.3	24.0	34.0	594	-28.3	20.5	31.3
356	-8.1	35.7	42.6	416	-13.3	31.6	39.7	476	-18.6	27.5	36.7	536	-23.5	23.9	34.0	596	-28.4	20.4	31.3
358	-8.3	35.6	42.5	418	-13.5	31.4	39.6	478	-18.7	27.4	36.6	538	-23.7	23.8	33.9	598	-28.6	20.3	31.2
																600	-28.8	20.2	31.1

Appendix

PROPAGATION CURVES FOR THE 1.5 GHz BAND

(Extrapolated from the former Recommendation ITU-R P.370-7)

1 Introduction

1.1 The propagation curves represent field-strength values in the 1.5 GHz band as a function of various parameters; some curves refer to land paths, others refer to sea paths. The land path curves were prepared from data obtained mainly from temperate climates as encountered in Europe and North America. The sea path curves were prepared from data obtained mainly from the Mediterranean and the North Sea regions.

1.2 The propagation curves represent the field-strength values exceeded at 50 % of the locations (within any area of approximately 200 m by 200 m) for different percentages of time. They correspond to different transmitting antenna heights and a receiving antenna height of 10 m. The land path curves refer to a value of $\Delta h=50$ m which generally applies to rolling terrain commonly found in Europe and North America.

1.3 The curves in Figures 1a, 1b, 2a, 2b, 3a and 3b are given for effective transmitting antenna heights between 37.5 m and 1 200 m, each value given of the “effective height” being twice that of the previous one. For an other value of effective height, a linear interpolation between the two curves corresponding to the effective heights immediately above and below the actual value shall be used.

1.3.1 For an effective transmitting antenna height, h_1 , in the range 0 to 37.5 m, the field strength at a distance x from the transmitter is taken to be that given on the curve for 37.5 m at a distance of $(x + 25 - 4.1\sqrt{h_1})$ km. This procedure is valid for distances beyond the radio horizon given by $(4.1\sqrt{h_1})$ km. Field strength values for shorter distances are obtained by:

- calculating the difference between the field strength value at the radio horizon for height h_1 (using the procedure given above) and the value on the 37.5 m curve for the same distance;
- subtracting the absolute value of the difference thus obtained from the field strength value on the 37.5 m curve for the actual distance involved.

This may be expressed as in the following formulae where $E(x, h_1)$ is the field strength (dB(μ V/m)) for a distance x (km) and an effective transmitting antenna height h_1 (m):

$$E(x, h_1) = E[(x + 25 - 4.1\sqrt{h_1}), 37.5] \quad \text{for } x = (4.1\sqrt{h_1})$$

$$E(x, h_1) = E(x, 37.5) - E[4.1\sqrt{h_1}, 37.5] + E(25, 37.5) \quad \text{for } x < (4.1\sqrt{h_1})$$

1.3.2 For an effective transmitting antenna height, h_1 , greater than 1 200 m, the field strength at a distance x from the transmitter is taken to be that given on the curve for 1 200 m at a distance of $(x + 142 - 4.1\sqrt{h_1})$ km. This procedure is valid for distances beyond the radio horizon, given by $(4.1\sqrt{h_1})$ km. Field strength values for shorter distances are obtained by:

- calculating the difference between the field strength value at the radio horizon for height h_1 (using the procedure given above) and the value on the 1 200 m curve for the same distance;
- adding the absolute value of the difference thus obtained to the field strength value on the 1 200 m curve for the actual distance involved.

This may be expressed as follows:

$$E(x, h_1) = E[(x + 142 - 4.1\sqrt{h_1}), 1200] \quad \text{for } x = (4.1\sqrt{h_1})$$

$$E(x, h_1) = E(x, 1200) - E[4.1\sqrt{h_1}, 1200] + E(142, 1200) \quad \text{for } x < (4.1\sqrt{h_1})$$

This procedure is subject to the limitation that the value obtained does not exceed the free-space value.

1.4 For locations probabilities other than 50 %, correction values are given in Table 1. The correction values are ratios (dB) between the field strength needed for a given location probability and the field strength needed for a location probability of 50 %.

1.5 Estimates of mixed-path field strengths should be made in accordance with the methods described in section 4.

1.6 The curves in Figures 1a, 1b, 2a, 2b, 3a and 3b are based on long-term values (several years) and may be regarded as representative of the mean climatic conditions prevailing in all the temperate regions. It should be noted, however, that for brief periods of time (e.g. for some hours or even days), field strengths may be obtained which are much higher than those shown by these curves, particularly over relatively flat terrain.

1.7 It is known that the median field strength varies in different climatic regions, and data for a wide range of such conditions in North America and Western Europe show that it is possible to correlate the observed values of median field strength with the refractive index gradient in the first kilometre of the atmosphere above ground level. If n_s and n_1 are the refractive indices at the surface and at a height of 1 km respectively, and if ΔN is defined as $(n_s - n_1) \times 10^6$, then in a standard atmosphere, $\Delta N = 40$, the 50 % curves refer to this case. If the mean value of ΔN , in a given region, differs appreciably from 40, the appropriate median field strengths for all distances beyond the horizon are obtained by applying a correction factor of $0.5 (\Delta N - 40)$ dB to the curves. If ΔN is not known, but information concerning the mean value of N_s is available, where $N_s = (n_s - 1) \times 10^6$, an alternative correction factor of $0.2(N_s - 310)$ dB may be used, at least for temperate climates. Whilst those corrections have so far only been established for the geographical areas referred to above, they may serve as a guide to the corrections which may be necessary in other geographical areas. The extent to which it is reliable to apply similar corrections to the curves for field strengths exceeded 1 % and 10 % of the time is not known. It is expected, however, that a large correction will be required for the 1 % and 10 % values, in regions where super-refraction is prevalent for an appreciable part of the time.

2 Propagation curves

2.1 The curves in Figures 1a and 1b represent field-strength values exceeded at 50 % of the locations within any area of approximately 200 m by 200 m and for 50 % and 1 % of the time for land paths where Δh of 50 m is considered representative. They have been extrapolated by applying a correction to the UHF curves as given in the former Recommendation ITU-R P.370-7. For all percentages of the time and all antenna heights the field strength has been calculated by:

$$E_{1.5 \text{ GHz}} = E_{\text{UHF}} + 0.5 (E_{\text{UHF}} - E_{\text{VHF}})$$

2.2 The curves in Figures 2a, 2b, 3a and 3b represent field-strength values exceeded at 50 % of the locations and for 50 % and 1 % of the time for sea paths in cold seas and warm seas, the climatic characteristics of those areas being likened to those observed in the North Sea and the Mediterranean, respectively. The curves as given in the former Recommendation ITU-R P.370-7 for UHF have been used for all percentages of time and all antenna heights.

2.3 In areas subject to pronounced super-refraction phenomena, account should be taken of the information contained in section 1.7.

3. Location variability in area-coverage prediction

Area-coverage prediction methods are intended to provide the statistics of reception conditions over a given area, rather than at any particular point. The interpretation of such statistics will depend on the size of the area considered.

When one terminal of a radio path is stationary, and the other terminal is moved, path loss will vary continuously with location, according to the totality of influences affecting it. It is convenient to classify these influences into three main categories:

- *Multipath variations*
Signal variations will occur over distances of about a wavelength due to vector addition of signals resulting from multipath effects, e.g. reflections from the ground, buildings, etc.
- *Local ground cover variations*
Signal variations will occur due to obstruction by ground cover in the local vicinity, e.g. buildings, trees, etc., over distances of about the sizes of such objects. The magnitude of these variations will normally be significantly larger than multipath variations.

– *Path variations*

Signal variations will also occur due to changes in the geometry of the entire propagation path e.g. the presence of hills, etc. For all except very short paths, the magnitude of these variations will be significantly larger than that of local ground cover variations.

In area-coverage planning, location variability normally refers to the spatial statistics of local ground cover variations, with multipath variations averaged. This approach is useful over distances substantially larger than those over which ground cover variations occur and for which path variations are still insignificant. This may be an impracticable condition for an area over which path geometry is changing rapidly, such as sloping ground.

Location variability is typically quoted for an area of the order of a square of 100-200 m side, sometimes with the additional requirement that the area is flat. The important issue is whether path geometry significantly affects variations over the area concerned.

4. Calculation of mixed paths

When a path includes zones with different propagation characteristics, the following method is used which takes account of the different characteristics of the various parts of the path:

- a) For percentages of time < 10 %, the following procedure for calculating the field strength for paths crossing a land/sea boundary is used:

$$E_{m,t} = E_{l,t} + A(E_{s,t} - E_{l,t})$$

where:

$E_{m,t}$: field strength for mixed path for $t\%$ of the time

$E_{l,t}$: field strength for land path equal in length to the mixed path for $t\%$ of the time

$E_{s,t}$: field strength for sea path equal in length to the mixed path for $t\%$ of the time

A : interpolation factor as given in Figure 4.

In cases where the path crosses more than two zones (of which at least one is sea), the linear procedure given in b) is applied, first, to those sections of the path crossing sea zones and, secondly, to those sections crossing land zones. The two resulting values of field strength are then combined using the non-linear procedure given above. For all other cases, the procedure given in b) is applied.

- b) For percentages of time = 10 %, the following procedure is to be used:

$$E_{m,t} = \sum_i \frac{d_i}{d_T} E_{i,t}$$

where:

$E_{m,t}$: field strength for mixed path for $t\%$ of time

$E_{i,t}$: field strength for path in zone i equal in length to the mixed path for $t\%$ of time

d_i : length of path in zone i and

d_T : length of total path.

Figure 1a: Field strength for 1 kW e.r.p. versus distance as a function of effective transmitting antenna height; LAND; 50 % of the time

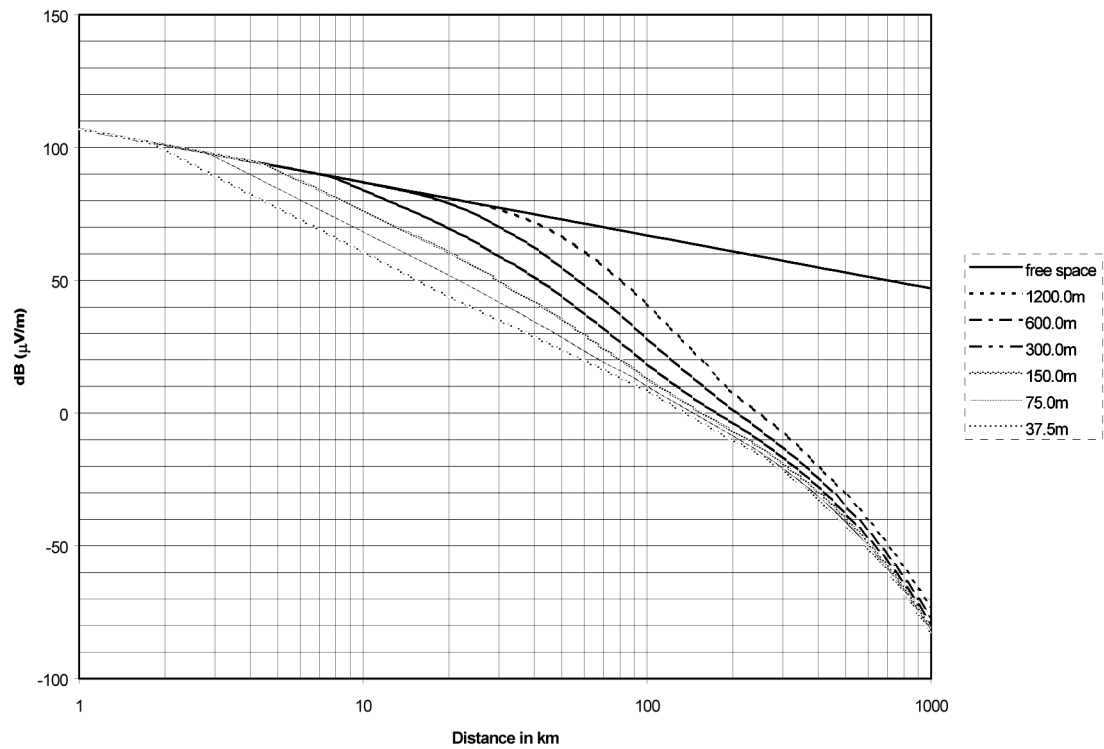


Figure 1b: Field strength for 1 kW e.r.p. versus distance as a function of effective transmitting antenna height; LAND; 1 % of the time

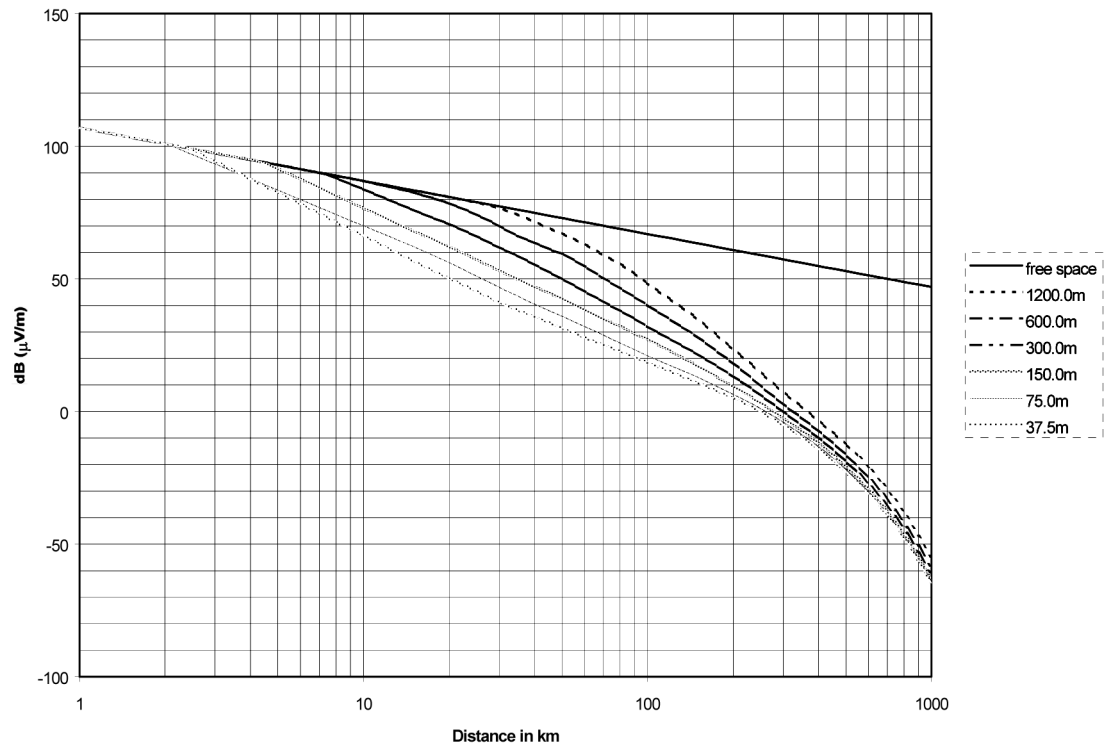


Figure 2a: Field strength for 1 kW e.r.p. versus distance as a function of effective transmitting antenna height; COLD SEA; 50 % of the time

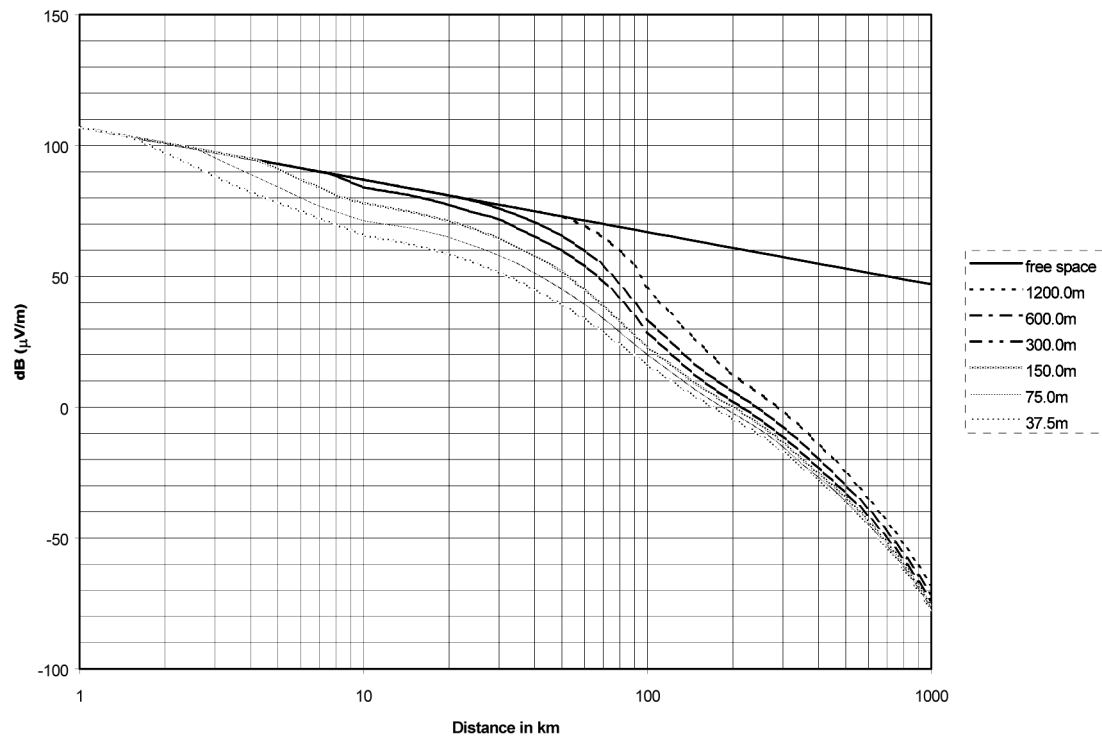


Figure 2b: Field strength for 1 kW e.r.p. versus distance as a function of effective transmitting antenna height; COLD SEA; 1 % of the time

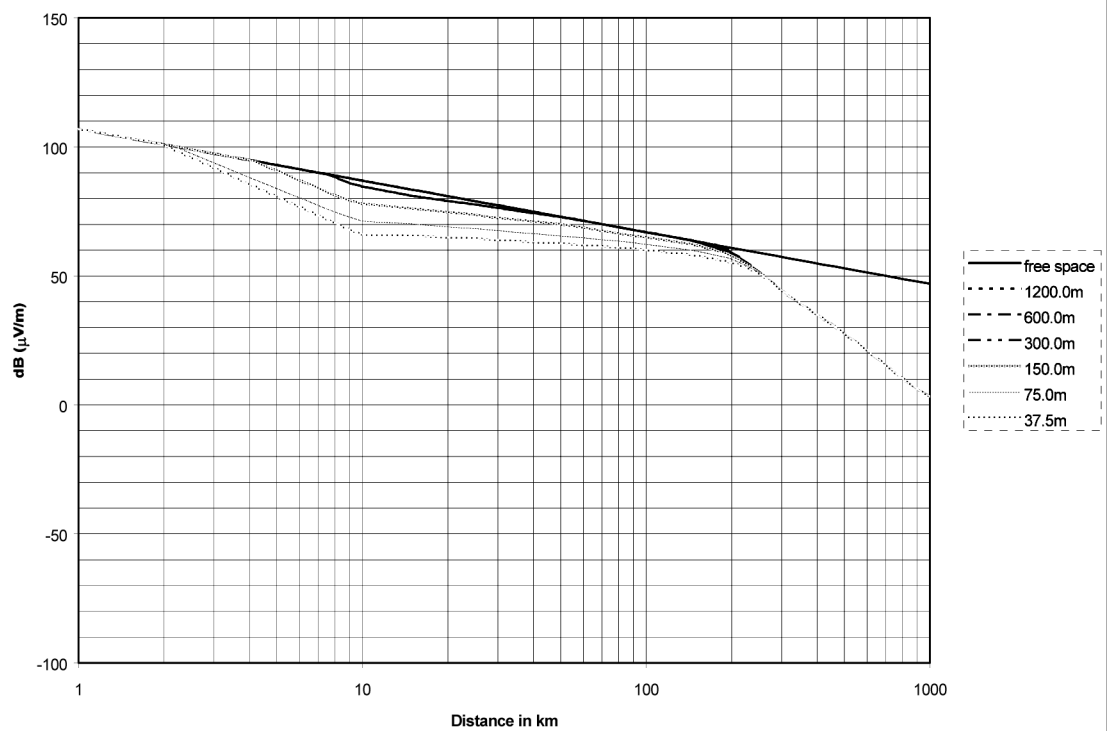


Figure 3a: Field strength for 1 kW e.r.p. versus distance as a function of effective transmitting antenna height; WARM SEA; 50 % of the time


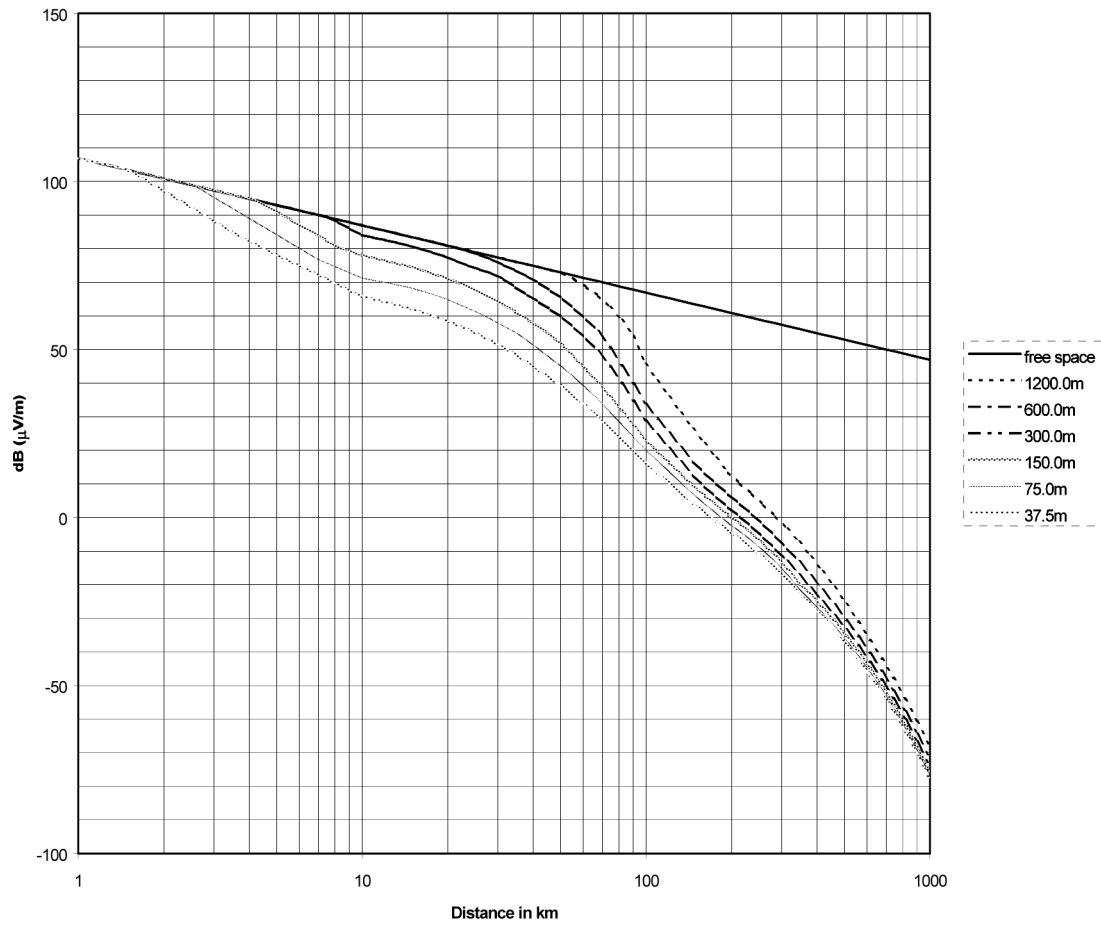


Figure 3b: Field strength for 1 kW e.r.p. versus distance as a function of effective transmitting antenna height; WARM SEA; 1 % of the time

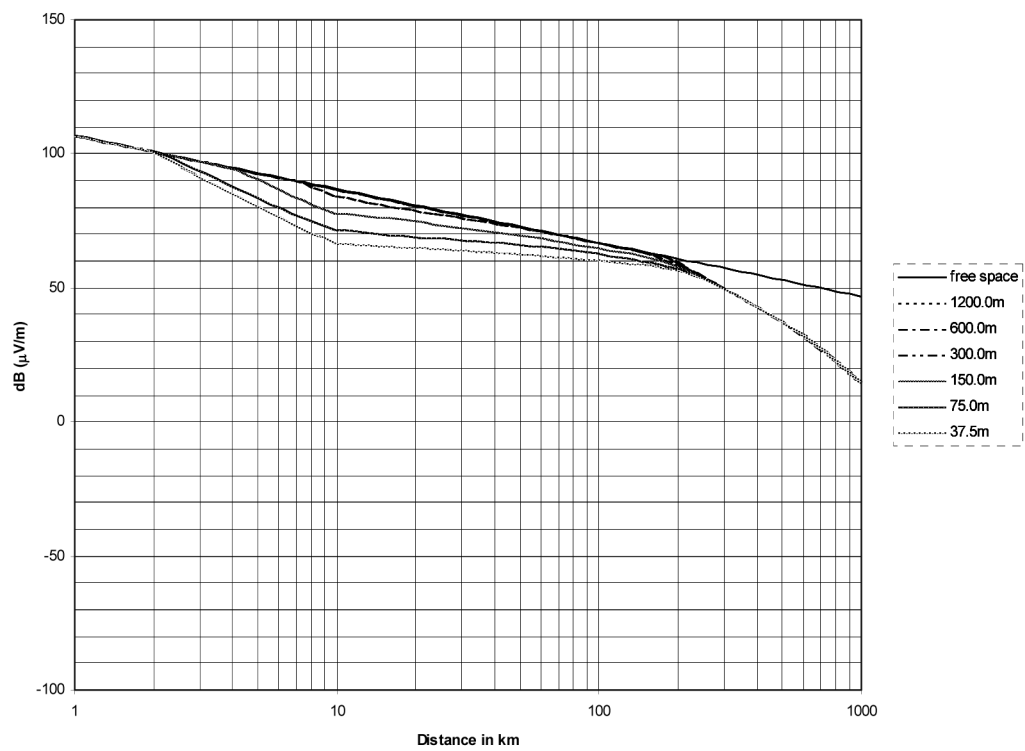


PERCENTAGE (of receiving locations)	RATIO (dB) (of field strengths)	PERCENTAGE (of receiving locations)	RATIO (dB) (of field strengths)	PERCENTAGE (of receiving locations)	RATIO (dB) (of field strengths)
1	12.797	34	2.266	67	-2.417
2	11.298	35	2.117	68	-2.570
3	10.347	36	1.969	69	-2.725
4	9.631	37	1.823	70	-2.882
5	9.049	38	1.678	71	-3.042
6	8.553	39	1.534	72	-3.204
7	8.118	40	1.391	73	-3.369
8	7.729	41	1.249	74	-3.537
9	7.375	42	1.108	75	-3.708
10	7.050	43	0.968	76	-3.883
11	6.747	44	0.829	77	-4.062
12	6.463	45	0.690	78	-4.246
13	6.196	46	0.551	79	-4.434
14	5.942	47	0.413	80	-4.628
15	5.700	48	0.275	81	-4.828
16	5.469	49	0.137	82	-5.034
17	5.248	50	0.000	83	-5.248
18	5.034	51	-0.137	84	-5.469
19	4.828	52	-0.275	85	-5.700
20	4.628	53	-0.413	86	-5.942
21	4.434	54	-0.551	87	-6.196
22	4.246	55	-0.690	88	-6.463
23	4.062	56	-0.829	89	-6.747
24	3.883	57	-0.968	90	-7.050
25	3.708	58	-1.108	91	-7.375
26	3.537	59	-1.249	92	-7.729
27	3.369	60	-1.391	93	-8.118
28	3.204	61	-1.534	94	-8.553
29	3.042	62	-1.678	95	-9.049
30	2.882	63	-1.823	96	-9.631
31	2.725	64	-1.969	97	-10.347
32	2.570	65	-2.117	98	-11.298
33	2.417	66	-2.266	99	-12.797

Table 1

Ratio (dB) of the field strength for a given percentage of the receiving locations to the field strength for 50 % of the receiving locations (for digital systems, bandwidth >1.5 MHz)

Figure 4
Interpolation for mixed land/sea paths

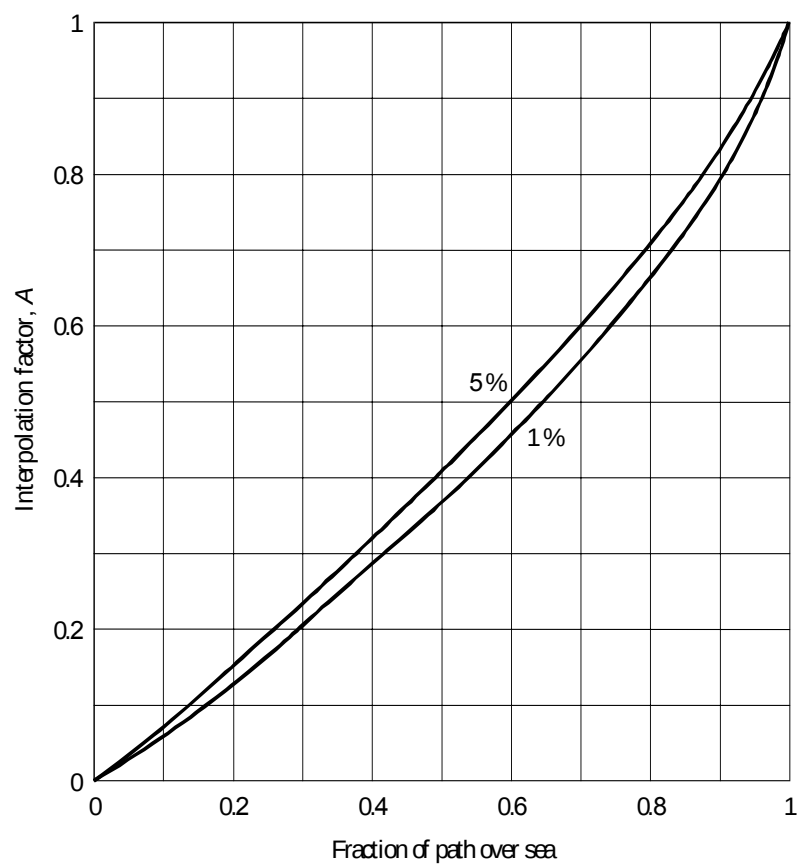

ANNEX 3 A

Basic characteristics of a T-DAB allotment to be communicated for a modification to the Allotment Plan, in accordance with Article 4

- 1 ADD/MOD¹/SUP
- 2 ITU code for administration
- 3 T-DAB identifier
- 4 Year in which this submission is intended to be converted into one or more assignments
- 5 Name of the allotment
- 6 frequency block
- 7 Type of Reference network (the standard reference models 1, 2 and 3; see Section 5.3 of Annex 2)
- 8 Centre frequency offset² (kHz)
- 9a Indicate if test points on country boundary for the allotment are to be used
- 9b If 9a) does not apply, give up to 36 test point co-ordinates (longitude and latitude) in degrees, minutes and seconds, clockwise starting from North
- 10 Date of submission
- 11 Remarks

Notes

- ¹ For modifications to an allotment, the characteristics which represent modifications should be indicated both the old and the new value.
- ² Offset is defined as (centre frequency to be used) - (nominal centre frequency).

For submission of data in the electronic form the record-structure specified in Appendix 1 to this Annex shall be used.

ANNEX 3 B

Basic characteristics of T-DAB assignment to be communicated for the conversion of a T-DAB allotment into one or more assignments, in accordance with Article 6

- 1 ADD/MOD¹/SUP
- 2 ITU code for a responsible administration
- 3 Identification code of the assignment used by the administration
- 4 Date of entry into operation
- 5 ITU code for a country in which the transmitter is situated
- 6 T-DAB identifier
- 7 Name of allotment
- 8 Name of the transmitter station
- 9 Geographical co-ordinates of the transmitter (latitude and longitude; in degrees, minutes, seconds – preferably WGS84)
- 10 Altitude of site above mean sea level (m)
- 11 Frequency block
- 12 Nominal centre frequency
- 13 Centre frequency offset² (kHz)
- 14 Maximum effective radiated power of the horizontally polarized component (dBW)
- 15 Maximum effective radiated power of the vertically polarized component (dBW)
- 16 Polarization (horizontal, vertical, mixed)
- 17 Height of transmitting antenna above ground level (m)
- 18 Antenna attenuation (dB) for the horizontally polarized component referred to the maximum value of the effective radiated power (quoted in 14) for each step of 10 degrees clockwise starting from North
- 19 Antenna attenuation (dB) for the vertically polarized component referred to the maximum value of the effective radiated power (quoted in 15) for each step of 10 degrees clockwise starting from North
- 20 Effective antenna height (m) for each step of 10 degrees clockwise starting from North
- 21 Agreement numbers of the Plan
- 22 Date of submission
- 23 Remarks**

Notes

¹ For modifications to an assignment, the characteristics which represent modifications should be indicated, both the old and the new value.

² Offset is defined as (centre frequency to be used) - (nominal centre frequency).

For submission of data in the electronic form the record-structure specified in Appendix 2 to this Annex shall be used.

Appendix 1

Data structure for electronic submission of basic characteristics of a T-DAB allotment to be communicated for a modification to the Allotment Plan

Each data file consists of the fixed length records separated by the "Carriage return - Line feed" (CrLf) pair of characters.

Each record consists of a number of fields containing ASCII characters. An interpretation of any record is unambiguously defined by the field "Record identifier" (field 1).

Each field is uniquely defined by its position within the record.

Field	Item	Start Column	Width	Type
1	Record identifier, must be 'ALL2'	1	4	A4
2	ITU code for administration responsible (padded by underscores to 3 characters)	5	3	A3
3	T-DAB identifier (5digits identifying number)	8	5	A5
4	ADD/MOD/SUP	13	3	A3
5	Year in which this submission is intended to be converted into one or more assignments	16	4	I4
6	Name of the allotment (Up to 20 alphanumeric characters)	20	20	A20
7	T-DAB frequency block	40	3	A3
8	Type of the reference network (the standard reference models 1, 2 and 3; see Section 5.3 of Annex 2)	43	1	I1
9	Centre frequency offset in Hz - defined as: (centre frequency to be used) - (nominal centre frequency)	44	8	I8
10	Enter "B" if test points on the country boundary for the allotment are to be used. Otherwise leave blank	52	1	A1
11	If previous field is blank, enter Number of test points (up to 36)	53	2	I2
12	Test points. Up to 36 co-ordinates (longitude and latitude) in degrees and minutes. Example: 017E164346N2731 is co-ordinate 17 deg, 16 min, 43 sec East and 46 deg, 27 min, 31 sec North	55	540	36(I3,A1,I2,I2, I2,A1,I2, I2)
13	Date of submission (DDMMYYYY)	595	8	2I2,I4
14	Remarks	603	165	A165
99	Reserved for housekeeping purposes	768	32	A32

Record length: 799 characters

Appendix 2

Data structure for electronic submission of basic characteristics of T-DAB assignment to be communicated for the conversion of a T-DAB allotment into one or more assignments

Each data file consists of the fixed length records separated by the "Carriage return - Line feed" (CrLf) pair of characters.

Each record consists of a number of fields containing ASCII characters. An interpretation of any record is unambiguously defined by the field "Record identifier" (field 1).

Each field is uniquely defined by its position within the record.

Field	Item	Start Column	Width	Type
1	Record identifier, must be 'ASS2'	1	4	A4
2	ITU code for administration responsible (padded by underscores to 3 characters)	5	3	A3
3	T-DAB identifier (5-digits identifying number)	8	5	I5
4	ADD/MOD/SUP	13	3	A3
5	Identification code of the assignment used by the administration	16	9	A9
6	Date of entry into operation (DDMMYYYY)	25	8	2I2, I4
7	ITU code for country in which transmitter is sited (padded by underscores to 3 characters)	33	3	A3
8	Name of the allotment	36	20	A20
9	Name of the transmitter station	56	20	A20
10	Transmitter site - latitude (in degrees, minutes and seconds). Example: 46N2731 is co-ordinate 46 degrees, 27 minutes and 31 seconds North	76	7	I3, A1, 2I2
11	Transmitter site - longitude (in degrees, minutes and seconds). Example: 017E1643 is co-ordinate 17 degrees, 16 minutes and 43 seconds East	83	8	I2, A1, 2I2,
12	Altitude of site (meters above sea level; as sign followed by number)	91	5	I5
13	T-DAB frequency block	96	3	A3
14	Nominal centre frequency in MHz (including decimal point)	99	9	F9.3
15	Centre frequency offset in Hz - defined as: (centre frequency to be used) - (nominal centre frequency)	108	8	I8
16	Maximum e.r.p. of horizontally polarised component (in dBW; as sign followed by a number including a decimal point)	116	5	F5.1
17	Maximum e.r.p. of vertically polarised component (in dBW; as sign followed by a number including a decimal point)	121	5	F5.1
18	Polarisation (<u>H</u> / <u>V</u> / <u>M</u>)	126	1	A1
19	Height of transmitting antenna (meters above ground level)	127	3	I3
20	<u>D</u> irectional/ <u>N</u> on-directional	130	1	A1
21	Antenna attenuation - horizontal. 36 values of e.r.p. reduction (in dB) of the horizontally polarised component in the horizontal plane relative to the maximum e.r.p. component as given in field 16 (at 10 degrees intervals, starting at North, clockwise)	131	72	36I2
22	Antenna attenuation - vertical. 36 values of e.r.p. reduction (in dB) of the vertically polarised component in the horizontal plane relative to the maximum e.r.p. as given in field 17 (at 10 degree intervals, starting at North, clockwise)	203	72	36I2
23	Effective antenna height. Put 'U' if the effective height of the antenna is the same in all directions. Otherwise put 'N'	275	1	A1
24	If the preceding field contains 'U' give the effective height. Otherwise give 36 values of effective antenna height (in meters, at 10 degree intervals, starting at North, clockwise)	276	180	36I5
25	Unused	456	1	
26	Date of submission (DDMMYYYY)	457	8	2I2, I4
27	Agreement numbers of the Plan	465	100	20A5
28	Remarks	565	203	A203
99	Reserved for database housekeeping purposes	768	32	A32

Record length: 799 characters

ANNEX 4

TECHNICAL PROCEDURES FOR CO-ORDINATION

1. INTRODUCTION

The T-DAB Allotment Plan was developed using the concept of test points, T-DAB reference networks and agreements between administrations. Test points along the boundary of each T-DAB allotment area and for other services to be protected were supplied by administrations to the Planning Meeting.

This Annex describes the detailed procedures for:

- converting an allotment into one or more assignments;
- the addition or modification of an allotment.

2. PROCEDURES FOR THE CONVERSION OF AN ALLOTMENT INTO ONE OR MORE ASSIGNMENTS

2.1 General procedures

The following procedures have been determined to enable the implementation of the Plan without undue restrictions.

It is assumed that a T-DAB allotment will be implemented as a set of transmitting stations operating as a single frequency network. The latter is referred to below as a “real network”.

The individual field strength, at any test point, produced by each transmitter of a real network should be determined using the field strength prediction method specified in Section 2 of Annex 2.

In the case of potential interference to the aeronautical mobile service, the free space propagation model is to be used, subject to a line of sight condition between transmitter and test point and also subject to a maximum distance of 500 km. The value of the determined individual field strength should be modified, where relevant, by taking account of any receiving antenna discrimination. The cumulative interfering field strength is calculated by the power sum method, with the result rounded to one decimal place as explained below.

Only the interference from that allotment being converted into assignments will be taken into account.

The individual field strengths obtained at any test points from all transmitting stations of the T-DAB allotment are processed in decreasing order. The power sum is obtained as follows:

- starting from the highest, the power values equivalent to the interfering field strengths are added, one after the other;
- at each summation, the result is compared to the previous one;
- if the increase in power is greater than or equal to 0.5 dB, the summation process continues;
- if the increase in power would be less than 0.5 dB, the summation process is stopped and 0.5 dB is added, giving the result of the power sum.

In order to provide flexibility for the development of T-DAB services, it is necessary to provide an overall limit for the interference which could be created by a set of T-DAB assignments. In order to do this, a limited number of calculation test points are introduced (see Appendix 1).

To avoid ambiguity, the Plan Management Body will determine the position of the calculation test points for each allotment and distribute them to all administrations, after resolution of potential anomalies in the position of the test points with the relevant administration.

Agreed coastlines are needed for the calculation of the mixed paths and agreed country borders are needed to identify any affected country or countries. The coastline shall be the current ITU versions. Country boundary data to be used are those agreed by the CEPT administrations following the Chester Meeting.

In addition to any constraints arising from the protection requirements detailed in sections 2.2 and 2.3, if the cumulative field strength from the transmitters of the real network exceeds 41.0 dB(μ V/m) at any of the calculation test points (see Appendix 1), co-ordination is required with those countries:

- touched by a calculation test point at which the cumulative field strength value exceeds 41.0 dB(μ V/m); or
- lying along the extension of the line which defines the calculation test point location, to a point at which a field strength value of 41.0 dB(μ V/m) is reached.

If, with regard to Section 3 in the procedure for the addition or modification of an allotment, values of the maximum permissible cumulative field strengths at the calculation test points lower than 41.0 dB(μ V/m) were notified, then co-ordination is required in the same way as if these values were exceeded.

If an assignment requested to be converted from an allotment exceeds the relevant limits, administrations may seek agreement between each other. If this is not possible, Section 3 can be applied.

2.2 Compatibility of T-DAB with T-DAB

2.2.1 Protection of co-block allotments

At the boundary test points describing any other co-block allotment, the interfering field strength level of 41.0 dB(μ V/m) must not be exceeded by a real network, unless there are special agreements between the administrations concerned. Such agreements are to be reached by bi-lateral or multi-lateral co-ordination. This value implies that the field strength to be protected becomes 69.0 dB(μ V/m) on the basis of a protection ratio of 10 dB and a margin of 18 dB (to allow for protection at 99 % of locations). In the case of Reference Network Two and Reference Network Three the field strength values should be increased by 2 and 4 dB, respectively.

In the case of allotments or assignments which are co-ordinated after the Maastricht Planning Meeting and where the calculation test points of the affected or co-ordinated co-block allotment are located inside the area of the other allotment, there should be notified a record of the maximum interfering field strength levels at individual test points of the affected and co-ordinated co-block allotments accepted when allotments are converted into assignments.

2.2.2 Protection of adjacent blocks in nearby areas

Co-ordination is needed if the cumulative interfering field strength of the real network is greater than 81 dB(μ V/m) at the boundary of any allotment with a frequency block adjacent to that of the allotment being converted to assignments. If the interfering field strength contour of the proposed station crosses the boundary of a nearby adjacent block allotment, it may be necessary to make a visual inspection of the relevant maps and undertake calculations to specify additional test points, taking account of topography.

2.3 Compatibility of T-DAB with Other Services

The cumulative interfering field strength resulting from the real network is to be checked at each boundary test point of the Other Service lying inside a circle with a radius of 500 km, around each boundary test point of the allotment being converted into assignments.

If there is no special agreement on the conditions of use of a T-DAB allotment with regard to the Other Services, the maximum permissible field strength (calculated as stated in Section 4.2.2. of Annex 2) to protect the relevant Other Service is to be observed.

The calculation of the maximum permissible field strength must take into account the field strength value to be protected which is specified in the data used at the planning meeting where this is higher than the default value given in Annex 2 for this Other Service.

Co-ordination is needed if the maximum permissible field strength value is exceeded by the cumulative interfering field strength of the real network at any boundary test point for a given Other Service requirement as described in Section 4.2.2 of Annex 2.

However, a T-DAB allotment in Annex 1 with no asterisk and no other conditions for use can be converted into T-DAB assignments without restrictions provided the cumulative interfering field strength of the real network does not exceed the worst case interfering field strength from a reference network situated at any of the boundary test points of the T-DAB allotment.

If there is a special agreement on the conditions of use of a T-DAB allotment with regard to the Other Services, co-ordination must be undertaken:

- if the agreement specifies that co-ordination is required before conversion of the allotment; or
- if the cumulative interfering field strength from the real network exceeds the agreed value, where such a value is specified in the agreement; or
- in the case where the agreement includes neither requirement for co-ordination nor specific field strength limit for T-DAB,
 - if the cumulative interfering field strength of the real network exceeds the worst case interference from a reference network situated at any boundary test point of the T-DAB allotment at any of the boundary test points of the Other Service area, except,
 - for those boundary test points of the Other Service area at which the cumulative interfering field strength does not exceed the maximum permissible field strength value (calculated as stated in Section 4.2.2 of Annex 2);
 - those which lie within a distance of 10 km from the T-DAB allotment, initially approximated by using the boundary test points;
- and also if the cumulative interfering field strength exceeds the value 38 dB(μ V/m) at any special calculation test point lying within the Other Service area; these special calculation test points shall be constructed in accordance with Appendix 1 to this Annex.

In this last case, at any of these test points, a cumulative interference field strength of the real network shall be accepted if it does not exceed the worst case interfering field strength from a reference network situated at any of the boundary test points of the T-DAB allotment, as this is the implication of an agreement without explicit restrictions.

Furthermore, when considering requests for co-ordination, administrations should note that it is difficult, when planning real networks, to avoid exceeding the field strength from a reference network by small amounts (1 to 2 dB), at a small number of test points. Such cases should be considered in a spirit of co-operation during the co-ordination process.

3. PROCEDURES FOR THE ADDITION OR MODIFICATION OF AN ALLOTMENT

In the application of the procedures given in Article 4, the methods and criteria given in Annex 2 have to be used to determine whether any other administration is affected by a proposal for a new or modified allotment.

Co-ordination is necessary if the allotment would, using one of the reference networks defined in Annex 2:

- cause field strengths greater than or equal to 38 dB(μ V/m) at the boundary of any other administration; or,
- with regard to any other services, cause field strengths greater than or equal to the maximum allowable interfering field strengths at the boundary of any other administration.

Co-ordination requests will be dealt with by the Plan Management Body in the order in which they are received, the date of reception of each request being recorded and published with the request.

Where a co-ordination request is submitted before the Plan Management Body publishes a co-ordination request from another administration, and where these two requests are mutually incompatible, they shall have an equivalent status in bilateral negotiations between the administrations concerned.

It is admissible for a requesting administration to include, as given in Annex 3B, the full technical characteristics of the assignments which are intended to be used to serve the allotment area. In such a case, the requesting administration should declare in the co-ordination pro-forma based on Annex 3A, that these assignments are to be used in interference calculations for the co-ordination process, instead of one of the reference networks defined in Annex 2.

The construction of calculation test points is the same procedure as given in Appendix 1 of this Annex. However, in the case described in the previous paragraph, the calculation test points are situated where the transmitting stations of these assignments create a cumulative field strength of 38 dB(μ V/m). If a subsequent conversion of the allotment involves assignments which differ in any respect from those included in the co-ordination of the allotment, then the procedure of Section 2.1 of this Annex shall be applied.

An administration receiving a request for co-ordination of an allotment which is co-block with one of its existing allotments may make agreement to this request conditional on the maintenance of its existing rights of implementation for this existing allotment. The effect of such a condition is that the new allotment would then not have a right of protection from the existing allotment within the contour described by the latter's calculation test points.

The introduction of frequency offsets for T-DAB blocks contained in the Plan is considered as a modification which must be co-ordinated. The relevant co-ordination criteria for T-DAB against T-DAB would have to be agreed upon among the administrations concerned.

The use of frequency offsets for T-DAB blocks relative to the frequencies adopted in the Plan may be considered, for example, for the purpose of reducing adjacent block interference.

Such changes involve design implications for T-DAB receivers and the effect of the offsets needs to be co-ordinated between the administrations concerned within the procedures for addition or modification of an allotment. In any event, the number of offset values should be kept to a minimum.

4. GENERAL

The principle of an equitable distribution of frequency resources shall be taken into account, in particular, if co-ordination requests are made for allotments which may have major effects on the T-DAB development plans of other administrations. In this case, the requesting administration should inform the countries affected prior to sending out the co-ordination request. However, in requesting an addition or modification of an allotment, the requesting administration should have a real intention to convert its allotment into one or more assignments within a suitable time period. In addition, it should be recognized that the requirements may vary in nature and detail from country to country. If necessary, administrations may apply the procedures given in paragraph 2.4 of Article 2.

In cases of bi-lateral or multi-lateral agreements, administrations may agree to use different field strength prediction models, e.g. considering topographic elements. Similarly, they may also agree on a programme of measurements to confirm predicted results.

APPENDIX 1

CONSTRUCTION OF CALCULATION TEST POINTS

1 The locations of the calculation test points are to be determined using the following procedure.

2 Perpendicular bisectors:

calculation test points are located outside the allotment area, along the perpendicular bisector of each of the lines joining adjacent boundary test points, where the field strength from the reference network would be 38.0 dB(μ V/m). Examples are point P in Figures 1, 3 and 5, points 2, 4, 6, 8, and 14 in Figure 7 and points 1b and 1c in Figure 8.

3 Angular bisectors:

further calculation test points are located outside the allotment area, along the bisector of the angle formed by the lines joining each boundary test point with its two adjacent boundary test points, where the field strength from the reference network would be 38.0 dB(μ V/m). Examples are point P in Figures 2, 4 and 6, points 1, 3, 5, 7, 10 and 13 in Figure 7, points 1a, 2a and 3a in Figure 8 and point 2e in Figure 9.

Taking account of the allotment boundary geometry shown in Figures 8 and 9, the following procedures are to be applied:

3.1 In the case where $\alpha < 180^\circ$ (see Figure 8):

- additional calculation test points are located outside the allotment area, along the perpendiculars to the lines joining point A to B, and point C to B, where the field strength from the reference network situated at point B would be 38.0 dB(μ V/m). Test points 1e and 1d are the result.
- If the distance between the constructed additional calculation test points 1e and 1d to calculation test point 1a is larger than 45 km additional test points are constructed by subdividing, equally, the sectors from test point 1a to test point 1e and/or test point 1a to test point 1d, to produce additional test points until:

$$\beta < 2 \arcsin(d/2D)$$

where: d is 45 km, and

D is either the larger of the distances from point B to test point 1e and point B to test point 1a in the case of the sector from test points 1e to 1a or, the larger of the distances from point B to test point 1d and point B to test point 1a in the case of the sector from test points 1a to 1d.

- The calculation test point on each of these additional lines is at the location where a field strength of 38.0 dB(μ V/m), is produced from a reference network situated at point B. This leads to calculation test points 1f and 1g in the case of the geometry of Figure 8.

3.2 In the case where $\alpha \geq 180^\circ$ (see Figure 9):

- additional calculation test points are located along the bisector of the angle formed by the lines joining the allotment test points A, B and C outside the allotment area, where the field strength from the reference network would be 38.0 dB(μ V/m).
- If the field strength of a reference network at any of the other test points of the allotment produces a higher field strength than that given above, the calculation test point must be moved further outside the allotment area, along the bisector of the angle, until the field strength from a reference network at all test points of the allotment is equal to or less than 38.0 dB(μ V/m); this gives calculation test point 2e in Figure 9.

4 All calculation test points that lie within the allotment area are to be disregarded, for example point 12 in Figure 7.

5 Calculation test points that lie too close to the boundary of the allotment area, such that the field strength from the reference network would be greater than 38.0 dB(μ V/m), are to be disregarded, for example points 9 and 11 in Figure 7.

- 6 If the length of a line drawn between adjacent calculation test points is more than 45 km additional calculation test points are to be constructed by subdividing the line in equal parts until the distance between adjacent calculation test points is less than the value given above.
- 7 Except where there is a co-block T-DAB allotment at a shorter distance; the distance between the allotment boundary and the relevant calculation test point will be approximately as shown in the table below:

	Reference Network 1	Reference Network 2	Reference Network 3
All land path	61 km	48 km	29 km
All cold sea path	354 km	380 km	326 km
All warm sea path	500 km	534 km	450 km

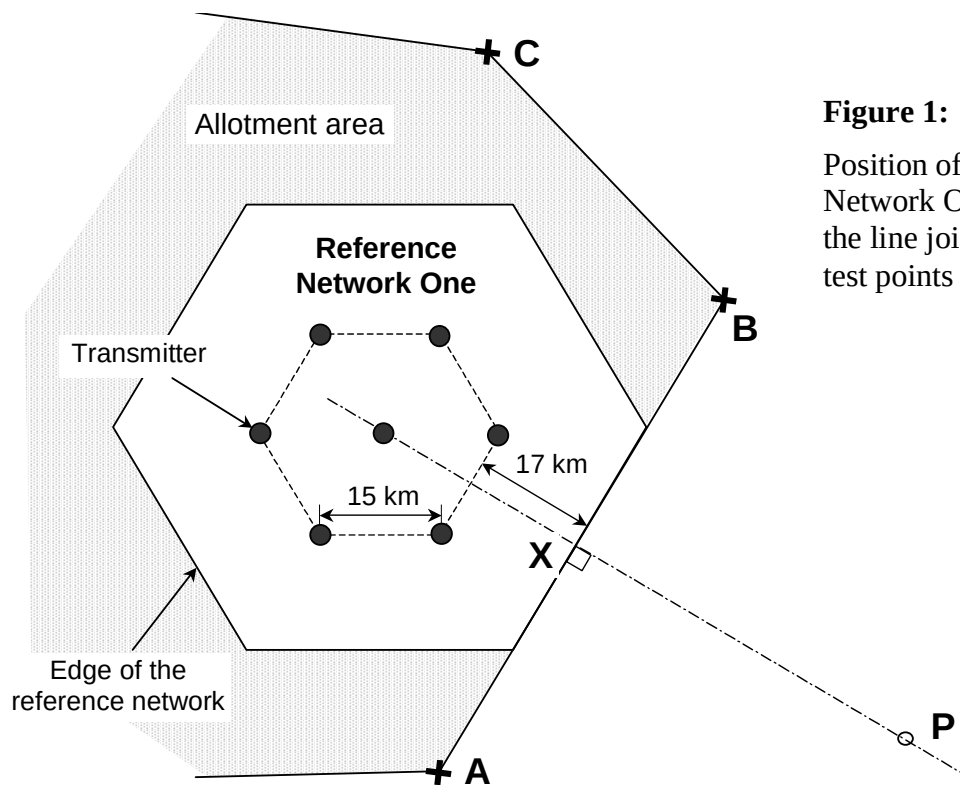


Figure 1:

Position of the Reference Network One relative to the line joining boundary test points A and B

Note:

- Points A, B and C are boundary points of the allotment area.
- The point X is the midpoint of the line A-B and is also the reference point of the reference network.
- The line defined by the points X and P is the perpendicular bisector of the line A-B and is also the line along which the interfering field strength is calculated.

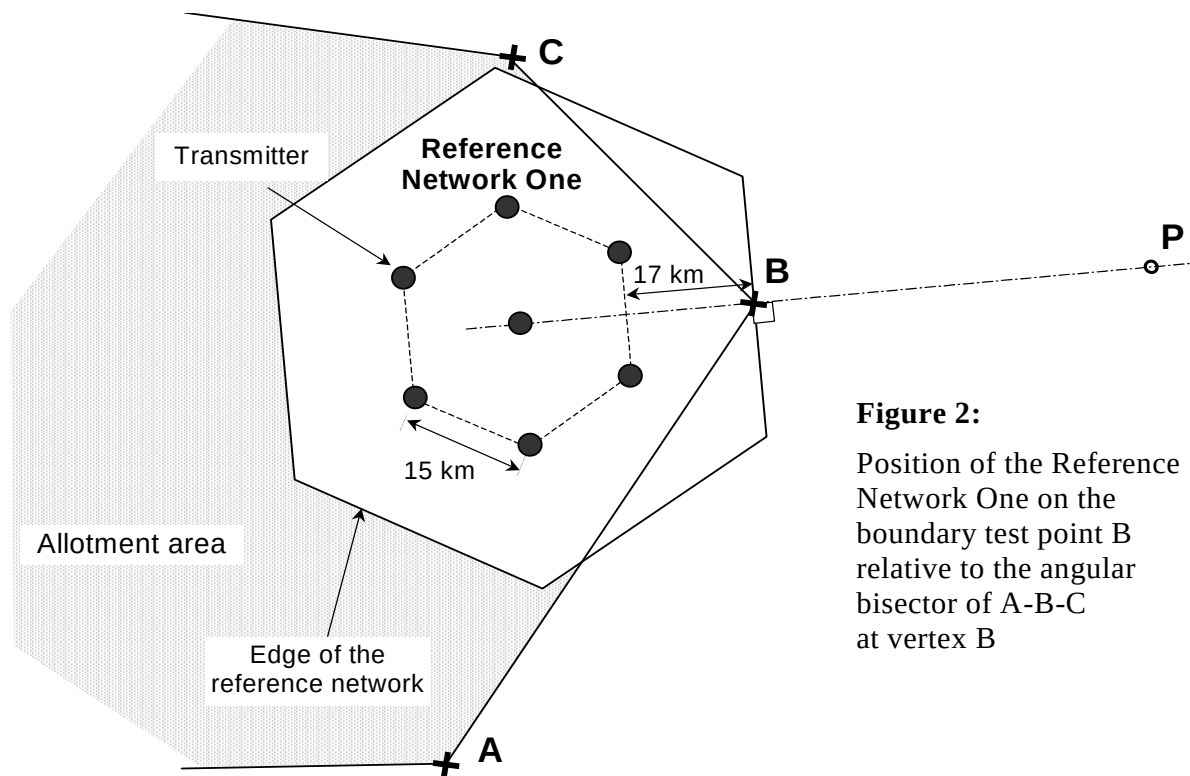


Figure 2:

Position of the Reference Network One on the boundary test point B relative to the angular bisector of A-B-C at vertex B

Note:

- Points A, B and C are boundary points of the allotment area.
- The point B is the vertex of the angle A-B-C and is also the reference point of the reference network.
- The line defined by the points B and P is the angle bisector of angle A-B-C and is also the line along which the interfering field strength is calculated.

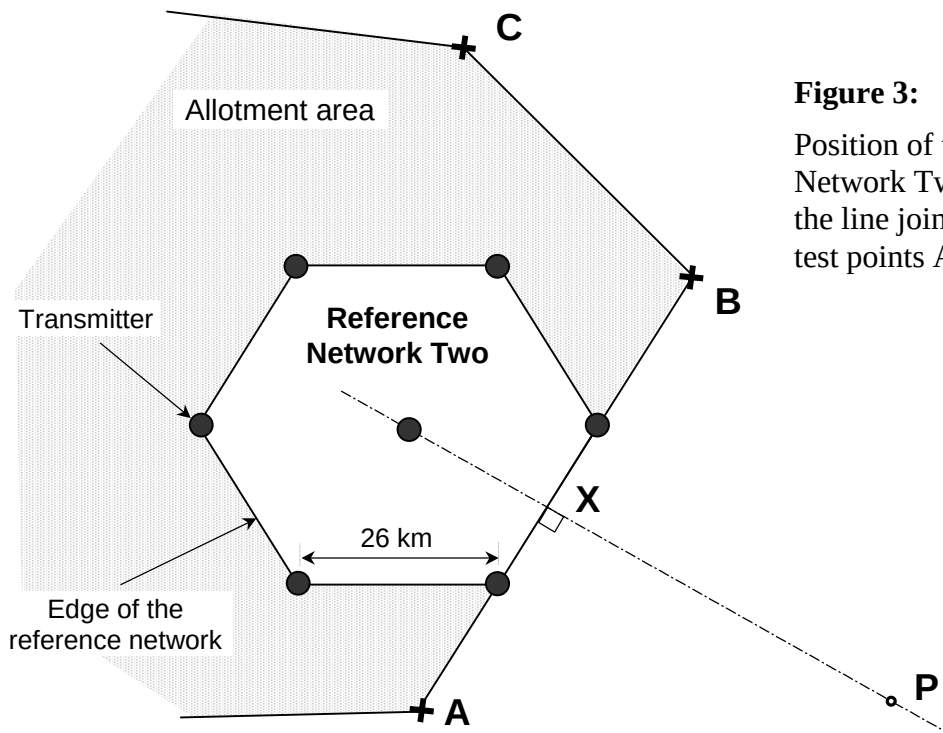


Figure 3:

Position of the Reference Network Two relative to the line joining boundary test points A and B

Note:

- Points A, B and C are boundary points of the allotment area.
- The point X is the midpoint of the line A-B and is also the reference point of the reference network.
- The line defined by the points X and P is the perpendicular bisector of the line A-B and is also the line along which the interfering field strength is calculated.

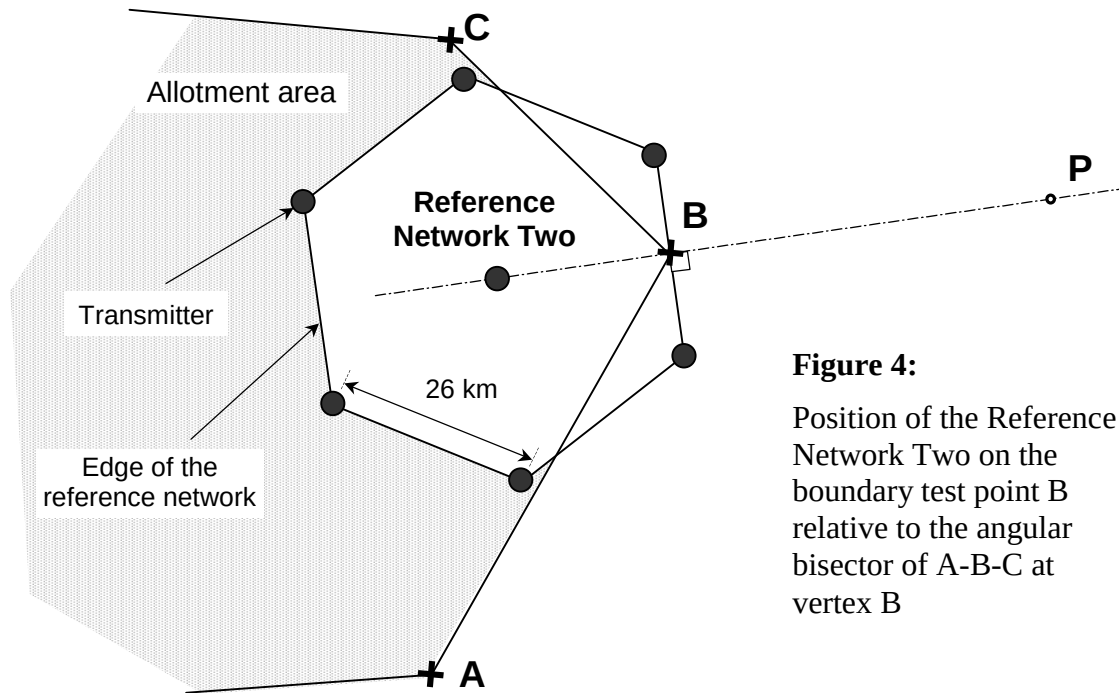


Figure 4:

Position of the Reference Network Two on the boundary test point B relative to the angular bisector of A-B-C at vertex B

Note:

- Points A, B and C are boundary points of the allotment area.
- The point B is the vertex of the angle A-B-C and is also the reference point of the reference network.
- The line defined by the points B and P is the angle bisector of angle A-B-C and is also the line along which the interfering field strength is calculated.

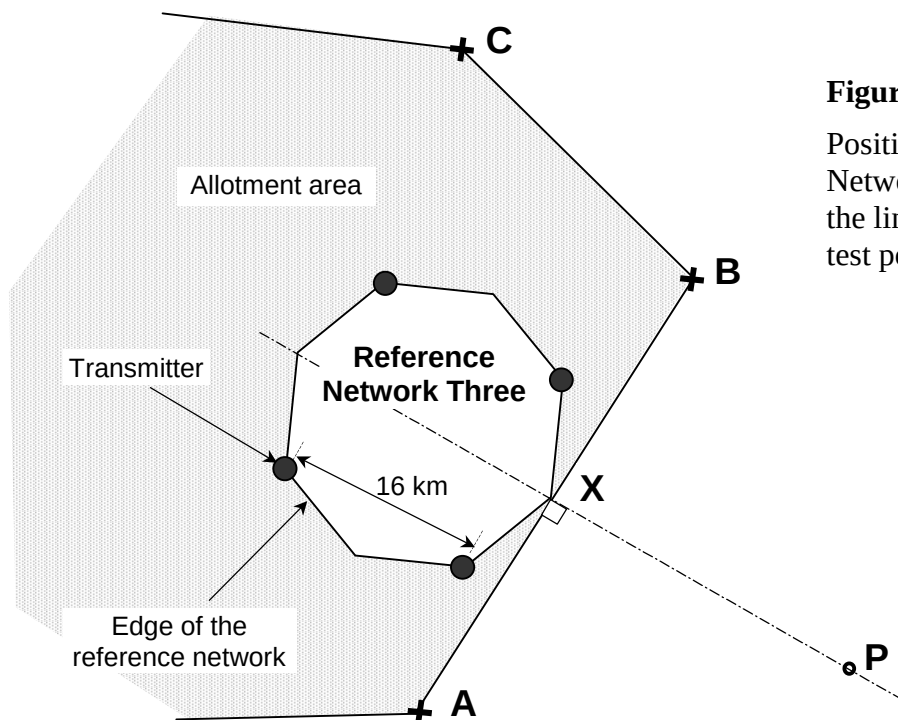


Figure 5:

Position of the Reference Network Three relative to the line joining boundary test points A and B

Note:

- Points A, B and C are boundary points of the allotment area.
- The point X is the midpoint of the line A-B and is also the reference point of the reference network.
- The line defined by the points X and P is the perpendicular bisector of the line A-B and is also the line along which the interfering field strength is calculated.

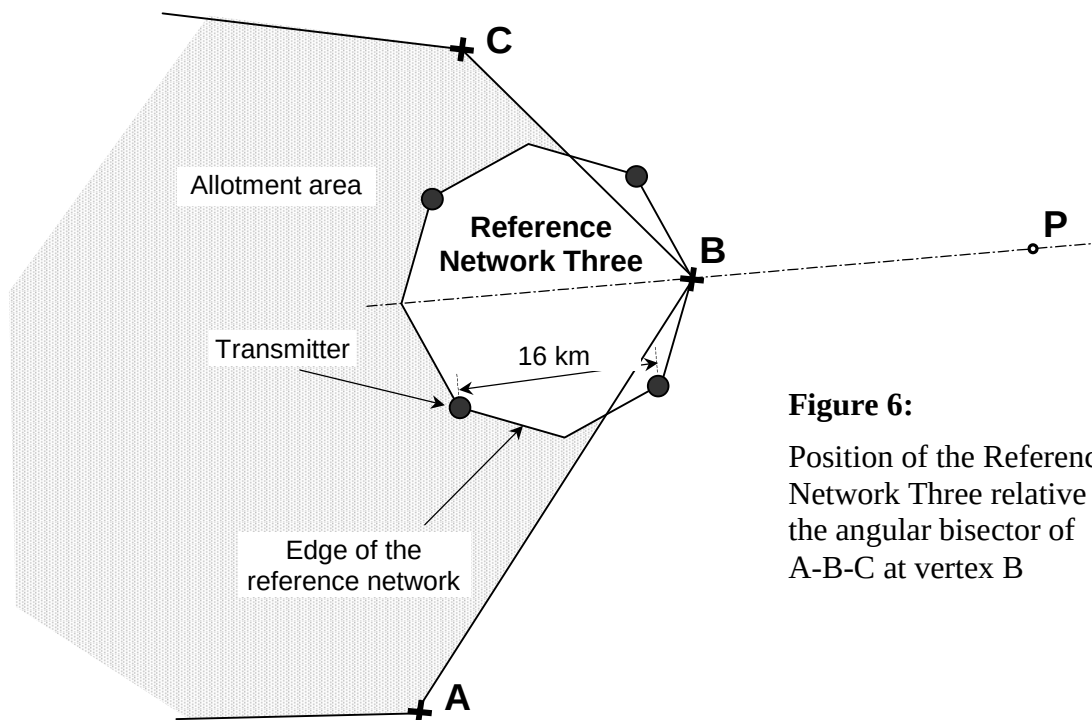


Figure 6:
Position of the Reference
Network Three relative to
the angular bisector of
A-B-C at vertex B

Note:

- Points A, B and C are boundary points of the allotment area.
- The point B is the vertex of the angle A-B-C and is also the reference point of the reference network.
- The line defined by the points B and P is the angle bisector of the line A-B and is also the line along which the interfering field strength is calculated.

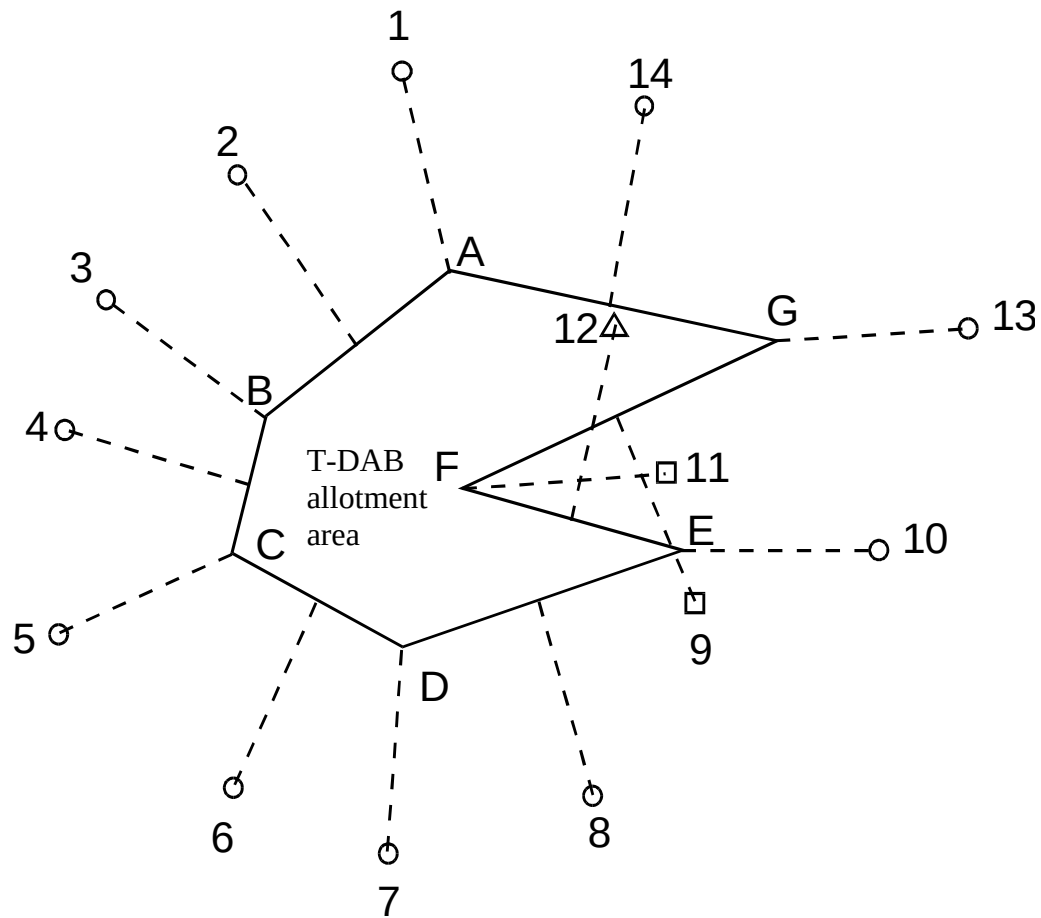


Figure 7

Location of the calculation test points

Note 1: Points A to G are the boundary test points of the allotment

Note 2: Points 1 to 14, excluding points 9, 11 and 12, are calculation test points

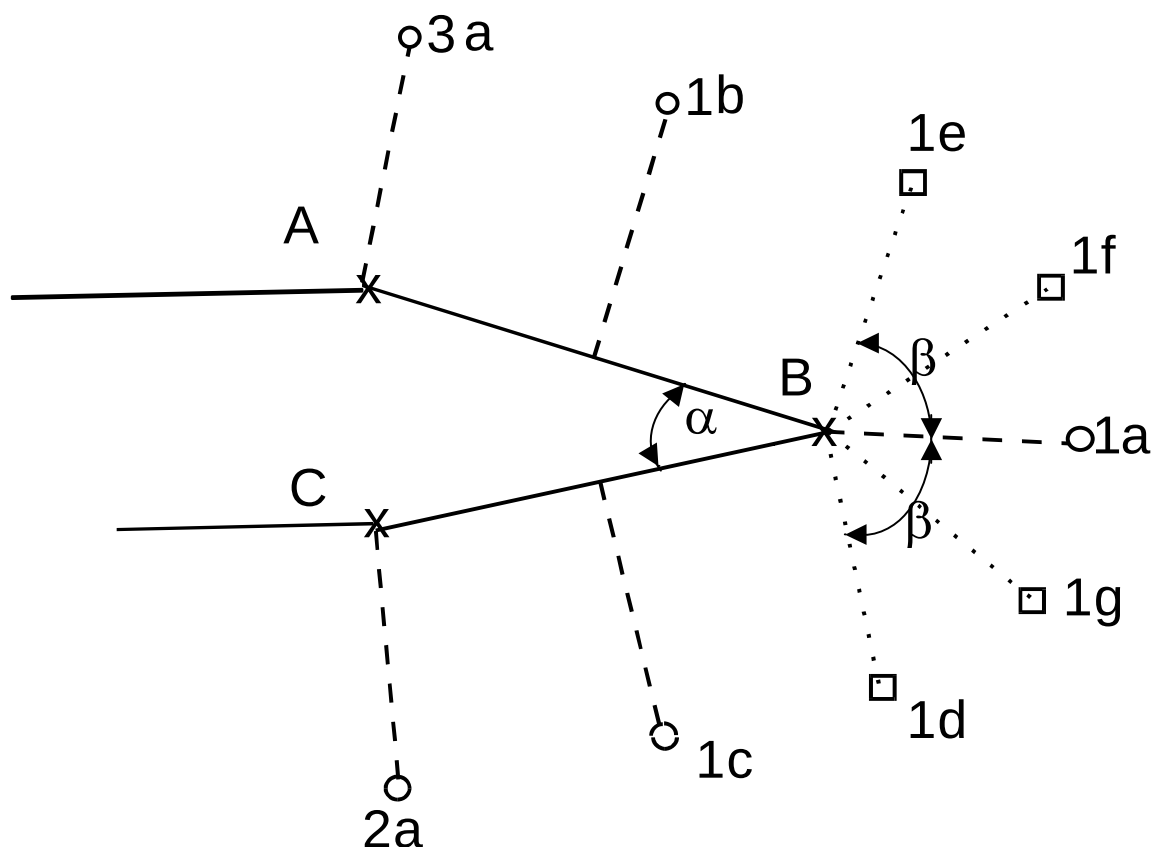


Figure 8

Construction of additional calculation test points if $\alpha < 180^\circ$ (see Note below)

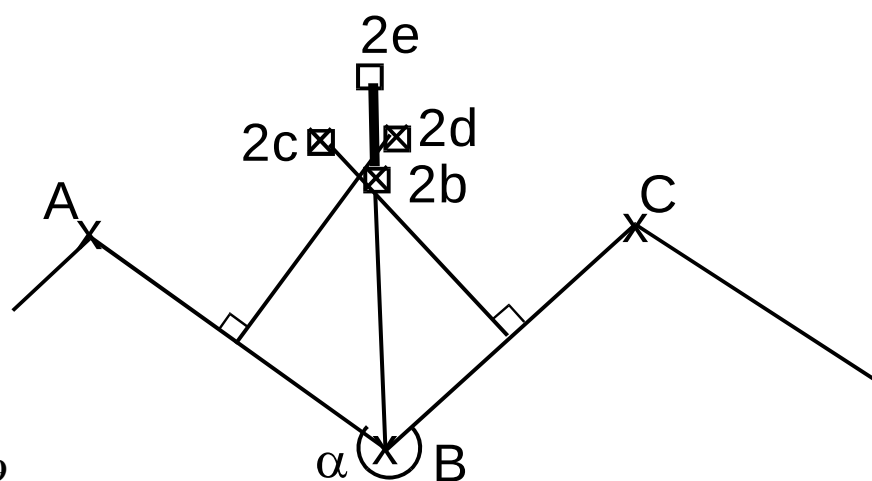


Figure 9

Construction of additional calculation test points if $\alpha \geq 180^\circ$ (see Note below)

Note: A, B, C Boundary test points of allotment
 ○ 1a, 1b, 1c, 2a, 3a Calculation test points
 □ 1d, 1e, 1f, 1g, 2e Additional calculation test points
 ⊠ 2b, 2c, 2d Calculation test points disregarded because the field strength exceeds the specified threshold

This diagram is for information purposes only and does not form part of the Special Arrangement.


Art. 4.3.1
Art. 4.3.2
Art. 4.3.3



Art. 4.3.3
Art. 4.5.1

Appendix 3 to Annex 4

Article 6 procedure

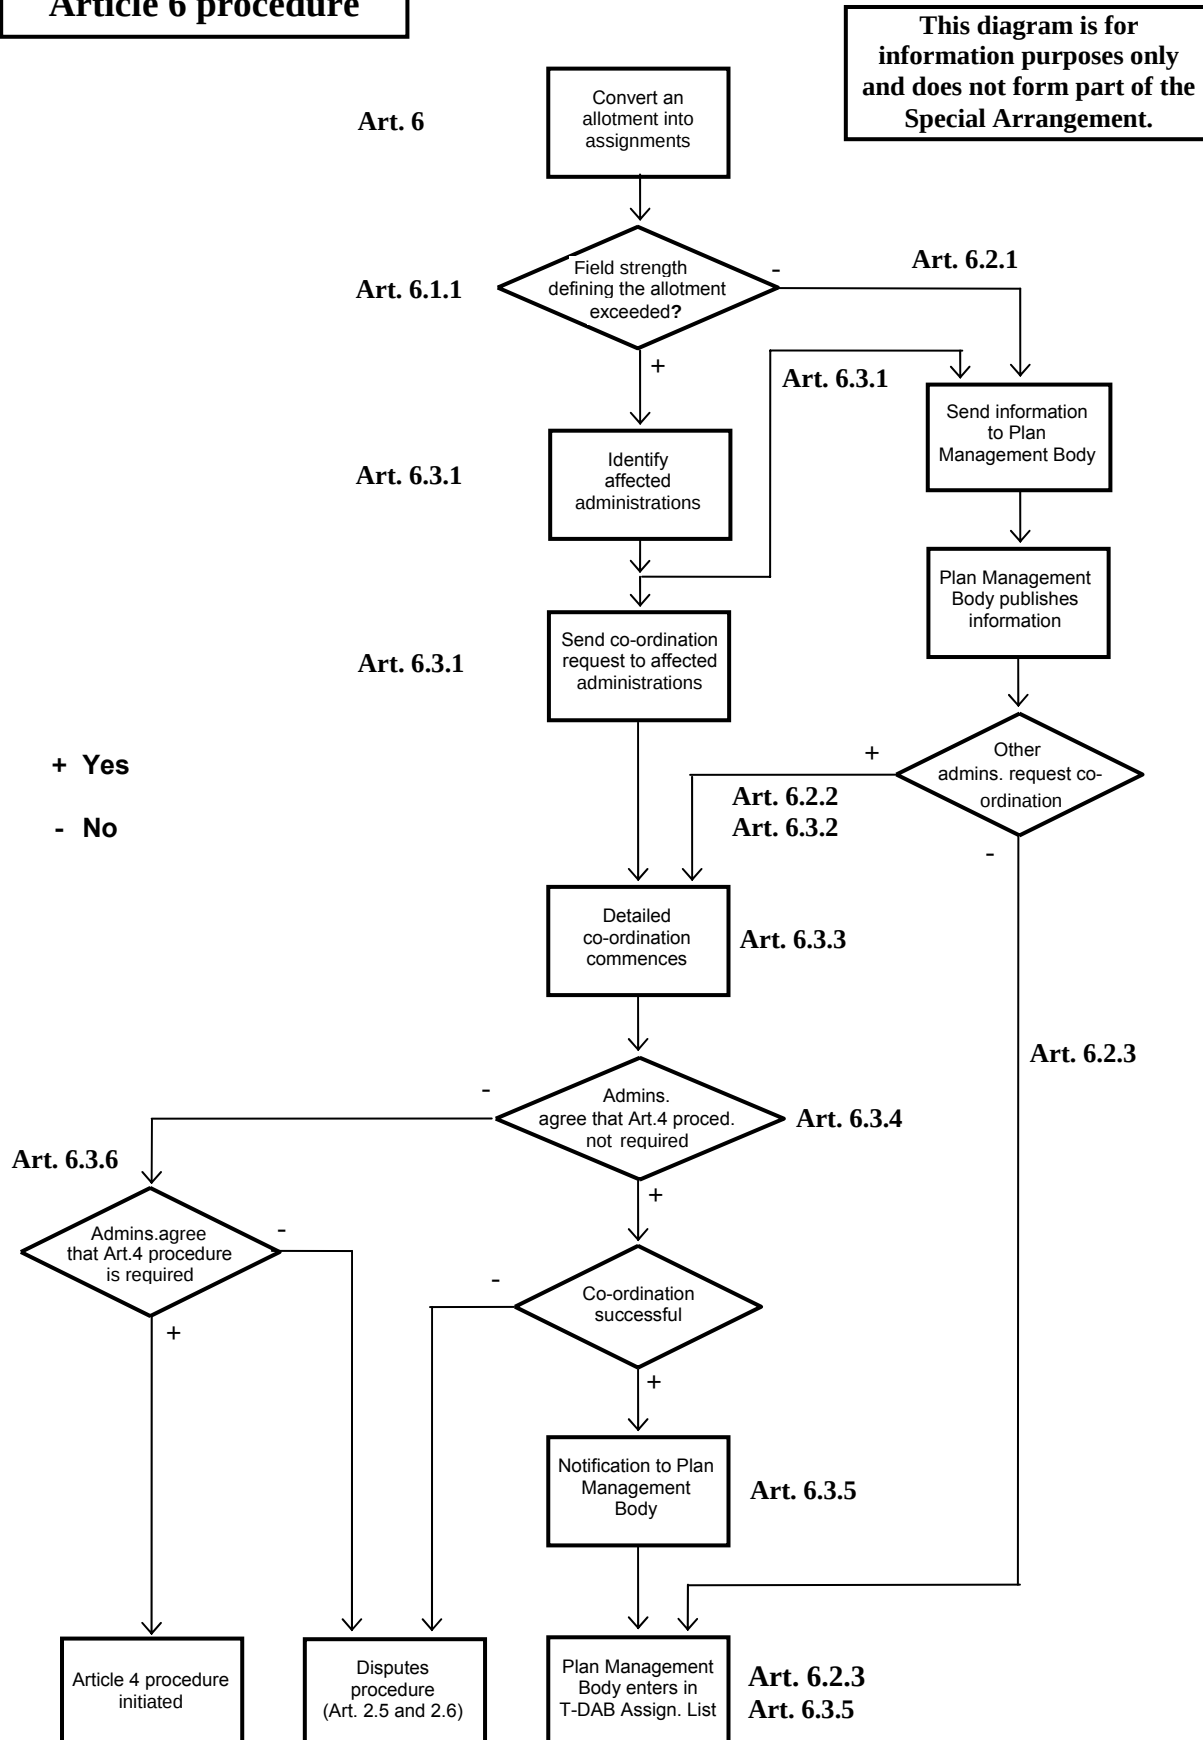

Supplementary Information A

to the

Special Arrangement
of the European Conference of Postal and Telecommunications Administrations (CEPT)
relating to the use of the band 1452 – 1479.5 MHz for
Terrestrial Digital Audio Broadcasting (T-DAB)

Complete List of Agreements for the Maastricht Special
Arrangement 2002 (including those transferred from the plan adopted at Wiesbaden, 1995)

Part A1: List of Agreements transferred from the Wiesbaden Arrangement, 2002

314	OS	HRV88011	SVN	LA LB LC LD LE LF LG LH LI
316	OS	HRV88013	SVN	LA LB LC LD LE LF LG LH LI
320	OS	SVN00167	HRV	LA LB LC LD LE LF LG LH LI
321	OS	SVN00168	HRV	LA LB LC LD LE LF LG LH LI
327	OS	HRV00564	HRV	12D LA LB LC LD LE LF LG LH LI
329	OS	HRV00566	HRV	12D LA LB LC LD LE LF LG LH LI
332	OS	HRV88011	HRV	12D LA LB LC LD LE LF LG LH LI
334	OS	HRV88013	HRV	12D LA LB LC LD LE LF LG LH LI
335	OS	HRV88014	HRV	12D LA LB LC LD LE LF LG LH LI
336	OS	HRV88015	HRV	12D LA LB LC LD LE LF LG LH LI
337	OS	HRV88016	HRV	12D LA LB LC LD LE LF LG LH LI
387	OS	F__03163	E	LC LD LE LF LG If French T-DAB implementation after 1.1.98
388	OS	F__03239	E	LC LD LE LF LG If French T-DAB implementation after 1.1.98
390	OS	F__03161	E	LC LD LE LF LG If French T-DAB implementation after 1.1.98
392	OS	F__03141	E	LC LD LE LF LG If French T-DAB implementation after 1.1.98
397	OS	F__03262	E	LC LD LE LF LG If French T-DAB implementation after 1.1.98
398	OS	F__03139	E	LC LD LE LF LG If French T-DAB implementation after 1.1.98
1508	OS	D__00053	F	LA LB LE
1509	OS	D__00059	F	LA LB LC LD LE
1512	OS	D__00084	F	LA LC LD
1517	OS	AUT01009	AUT	12A LA LB LC LD LE LF LG LH LI
1518	OS	AUT01008	AUT	12A LA LB LC LD LE LF LG LH LI
1519	OS	AUT01007	AUT	12A LA LB LC LD LE LF LG LH LI
1520	OS	AUT01006	AUT	LA LB LC LD LE LF LG LH LI
1521	OS	AUT01005	AUT	12A LA LB LC LD LE LF LG LH LI
1522	OS	AUT01001	AUT	LA LB LC LD LE LF LG LH LI
1523	OS	AUT01002	AUT	12A LA LB LC LD LE LF LG LH LI
1524	OS	AUT01003	AUT	12A LA LB LC LD LE LF LG LH LI
1525	OS	AUT01004	AUT	12A LA LB LC LD LE LF LG LH LI
1731	OS	LUX00002	F	12C LB LE Subject to coordination before bringing 12C in service. LB and LE also to be coordinated.

2120	OS	HNG00008	HNG	12A 12B 12C 12D 13A 13B LC LD LE LF
2121	OS	HNG00009	HNG	12A 12B 12C 12D 13A 13B LC LD LE LF
2817	OS	BEL30001	F	LB LE LF LG LH LI For LB minimum field strength shall be protected on link F__02054 (RX 04"E45'28" 49N49'31"
2868	OS	E__00102	E	LA LB LC LD LE LF LG LH LI
2869	OS	E__00103	E	LA LB LC LD LE LF LG LH LI
2871	OS	E__00104	E	LA LB LC LD LE LF LG LH LI
2878	OS	E__00111	E	LA LB LC LD LE LF LG LH LI
2879	OS	E__00114	E	LA LB LC LD LE LF LG LH LI
2899	OS	SVN00168	SVN	12B 12C 12D LA LB LC LD LE LF
3076	OS	F__03104	BEL	LD
3209	OS	LIE00001	SUI	LB LC LD LE
3247	OS	I__00332	I	2A 2B 2C 2D 3A 3B 3C 3D 4A 4B 4C 4D 5A 5B 5C 5D 6A 6B 6C 6D 7A 7B 7C 7D 8A 8B 8C 8D 9A 9B 9C 9D 10A 10B 10C 10D 11A 11B 11C 11D 12A 12B 12C 12D 13A 13B 13C 13D 13E 13F LA LB LC LD LE LF LG LH LI
3249	OS	I__00334	I	2A 2B 2C 2D 3A 3B 3C 3D 4A 4B 4C 4D 5A 5B 5C 5D 6A 6B 6C 6D 7A 7B 7C 7D 8A 8B 8C 8D 9A 9B 9C 9D 10A 10B 10C 10D 11A 11B 11C 11D 12A 12B 12C 12D 13A 13B 13C 13D 13E 13F LA LB LC LD LE LF LG LH LI
3251	OS	I__00336	I	2A 2B 2C 2D 3A 3B 3C 3D 4A 4B 4C 4D 5A 5B 5C 5D 6A 6B 6C 6D 7A 7B 7C 7D 8A 8B 8C 8D 9A 9B 9C 9D 10A 10B 10C 10D 11A 11B 11C 11D 12A 12B 12C 12D 13A 13B 13C 13D 13E 13F LA LB LC LD LE LF LG LH LI
3266	OS	SUI00013	F	LA LB LC LD
3275	OS	F__03116	SUI	LH LI
3278	OS	F__03127	SUI	LH LI
3281	OS	F__03129	SUI	LI
3284	OS	F__03124	SUI	LA LC LD
3285	OS	F__03224	SUI	LA LC LD
3375	OS	LIE00001	AUT	LB LE LF LE applicable after 2005
3376	OS	LIE00002	AUT	LB LE LF LE applicable after 2005
3417	OS	D__00094	F	LA LC LD
3419	OS	F__03123	SUI	LA
3424	OS	SUI00012	F	LB
3427	OS	HNG00007	AUT	LB LC LD LE applicable after 2005
3444	OS	E__00107	I	LA LB LC LD LE LF LG LH LI Subject to coordination before implementation.
3460	OS	E__00116	E	LA LB LC LD LE LF LG LH LI
3462	OS	E__00117	E	LA LB LC LD LE LF LG LH LI
3493	OS	AUT00001	HRV	LA LB LC LD LE LF LG LH LI
3494	OS	AUT01001	HRV	LA LB LC LD LE LF LG LH LI
3495	OS	AUT01002	HRV	LA LB LC LD LE LF LG LH LI
3496	OS	AUT01003	HRV	12D LA LB LC LD LE LF LG LH LI
3497	OS	AUT01006	HRV	12D LA LB LC LD LE LF LG LH LI
3498	OS	AUT01007	HRV	12D LA LB LC LD LE LF LG LH LI
3500	OS	AUT01001	SVN	12A 12B 12C 12D LC LD F2 F3
3504	OS	AUT01005	I	12A 12B 12C 12D LA LB LC LD LE LF LG LH LI 12A, 12B, 12C, 12D in Italy , MT will operate until 1997

3505	OS	AUT01007	I	12A 12B 12C 12D LA LB LC LD LE LF LG LH LI 12A, 12B, 12C, 12D in Italy , MT will operate until 1997
3517	OS	D__00032	G	LA D__00032 (Niedersachsen) interferes with G__00044 Amethyst A1 and G__00156 49-54-JP only by small margins, -1,6 dB and -0,3 dB
3519	OS	AUT01007	SUI	12A 12B 12C 12D LA LB LC LD LE LH LI F3 SB SC SD
3546	OS	D__00041	RUS	LA LB LC LD LE LF LG LH LI The German T-DAB Requirement D__00041 is compatible with the service XR/RUS00501 AMS_1 to RUS00504 AMS_4
3547	OS	D__00030	RUS	LA LB LC LD LE LF LG LH LI The German T-DAB Requirement D__00030 is compatible with the service XR/RUS00501 AMS_1 to RUS00504 AMS_4
3552	OS	HRV00560	HNG	12A 12B 12C 12D LA LB LC LD LE LF LG LH LI Not before 2002, if earlier then coordination case by case is obligatory.
3655	OS	HRV00560	I	12A 12B 12C 12D LA LB LC LD LE LF LG LH LI For 1.5 GHz case by case coordination is obligatory.
3716	OS	D__00023	G	LG D__00023//G__00356 Camelot B margin on Block LG -1,6 dB
3717	OS	MCO00001	I	LA LB LC LD LE LF LG LH LI Subject to coordination before implementation
3718	OS	MCO00002	I	LA LB LC LD LE LF LG LH LI Subject to coordination before implementation
3734	OS	HOL05006	G	LA
3736	OS	BUL10003	GRC	LA LB LC LD LE LF LH Subject to coordination before implementation.
3737	OS	BUL10004	GRC	LA LB LC LD LE LF LH Subject to coordination before implementation.
3738	OS	BUL10005	GRC	LA LB LC LD LE LF LH Subject to coordination before implementation.
3746	OS	AUT00001	AUT	11A 11B 11C 11D LE LF LG LH LI
3808	OS	F__03102	F	11A 11B 11C 11D LE LF LG LH LI
3810	OS	F__03104	F	11A 11B 11C 11D LE LF LG LH LI
3812	OS	F__03106	F	11A 11B 11C 11D LE LF LG LH LI
3813	OS	F__03107	F	11A 11B 11C 11D LE LF LG LH LI
3814	OS	F__03108	F	11A 11B 11C 11D LE LF LG LH LI
3816	OS	F__03110	F	11A 11B 11C 11D LE LF LG LH LI
3818	OS	F__03112	F	11A 11B 11C 11D LE LF LG LH LI
3819	OS	F__03113	F	11A 11B 11C 11D LE LF LG LH LI
3820	OS	F__03114	F	11A 11B 11C 11D LE LF LG LH LI
3822	OS	F__03116	F	11A 11B 11C 11D LE LF LG LH LI
3823	OS	F__03117	F	11A 11B 11C 11D LE LF LG LH LI
3825	OS	F__03119	F	11A 11B 11C 11D LE LF LG LH LI
3827	OS	F__03121	F	11A 11B 11C 11D LE LF LG LH LI
3829	OS	F__03123	F	11A 11B 11C 11D LE LF LG LH LI
3830	OS	F__03124	F	11A 11B 11C 11D LE LF LG LH LI
3831	OS	F__03125	F	11A 11B 11C 11D LE LF LG LH LI
3832	OS	F__03126	F	11A 11B 11C 11D LE LF LG LH LI
3834	OS	F__03128	F	11A 11B 11C 11D LE LF LG LH LI
3836	OS	F__03130	F	11A 11B 11C 11D LE LF LG LH LI
3837	OS	F__03131	F	11A 11B 11C 11D LE LF LG LH LI

3838	OS	F__03132	F	11A 11B 11C 11D LE LF LG LH LI
3839	OS	F__03133	F	11A 11B 11C 11D LE LF LG LH LI
3840	OS	F__03134	F	11A 11B 11C 11D LE LF LG LH LI
3841	OS	F__03135	F	11A 11B 11C 11D LE LF LG LH LI
3842	OS	F__03136	F	11A 11B 11C 11D LE LF LG LH LI
3843	OS	F__03137	F	11A 11B 11C 11D LE LF LG LH LI
3844	OS	F__03138	F	11A 11B 11C 11D LE LF LG LH LI
3846	OS	F__03140	F	11A 11B 11C 11D LE LF LG LH LI
3847	OS	F__03141	F	11A 11B 11C 11D LE LF LG LH LI
3854	OS	F__03148	F	11A 11B 11C 11D LE LF LG LH LI
3857	OS	F__03151	F	11A 11B 11C 11D LE LF LG LH LI
3860	OS	F__03154	F	11A 11B 11C 11D LE LF LG LH LI
3862	OS	F__03156	F	11A 11B 11C 11D LE LF LG LH LI
3865	OS	F__03159	F	11A 11B 11C 11D LE LF LG LH LI
3866	OS	F__03160	F	11A 11B 11C 11D LE LF LG LH LI
3867	OS	F__03161	F	11A 11B 11C 11D LE LF LG LH LI
3870	OS	F__03164	F	11A 11B 11C 11D LE LF LG LH LI
3871	OS	F__03201	F	11A 11B 11C 11D LE LF LG LH LI
3872	OS	F__03202	F	11A 11B 11C 11D LE LF LG LH LI
3875	OS	F__03205	F	11A 11B 11C 11D LE LF LG LH LI
3877	OS	F__03207	F	11A 11B 11C 11D LE LF LG LH LI
3880	OS	F__03210	F	11A 11B 11C 11D LE LF LG LH LI
3881	OS	F__03211	F	11A 11B 11C 11D LE LF LG LH LI
3883	OS	F__03213	F	11A 11B 11C 11D LE LF LG LH LI
3886	OS	F__03216	F	11A 11B 11C 11D LE LF LG LH LI
3887	OS	F__03217	F	11A 11B 11C 11D LE LF LG LH LI
3888	OS	F__03218	F	11A 11B 11C 11D LE LF LG LH LI
3890	OS	F__03220	F	11A 11B 11C 11D LE LF LG LH LI
3891	OS	F__03221	F	11A 11B 11C 11D LE LF LG LH LI
3894	OS	F__03224	F	11A 11B 11C 11D LE LF LG LH LI
3896	OS	F__03226	F	11A 11B 11C 11D LE LF LG LH LI
3900	OS	F__03230	F	11A 11B 11C 11D LE LF LG LH LI
3901	OS	F__03231	F	11A 11B 11C 11D LE LF LG LH LI
3903	OS	F__03233	F	11A 11B 11C 11D LE LF LG LH LI
3906	OS	F__03236	F	11A 11B 11C 11D LE LF LG LH LI
3917	OS	F__03247	F	11A 11B 11C 11D LE LF LG LH LI
3918	OS	F__03248	F	11A 11B 11C 11D LE LF LG LH LI
3923	OS	F__03253	F	11A 11B 11C 11D LE LF LG LH LI
3935	OS	MCO00001	F	11A 11B 11C 11D LE LF LG LH LI MCO must coordinate with France for the use of LA LB LC LD and not use these blocks before 1998.
3942	OS	GRC00002	GRC	12A 12B 12C 12D LA LB LC LD LE LF LG LH LI Internal interferences not to be taken into account.
3947	OS	GRC00007	GRC	12A 12B 12C 12D LA LB LC LD LE LF LG LH LI Internal interferences not to be taken into account.
3948	OS	GRC00008	GRC	12A 12B 12C 12D LA LB LC LD LE LF LG LH LI Internal interferences not to be taken into account.

3949	OS	GRC00009	GRC	12A 12B 12C 12D LA LB LC LD LE LF LG LH LI Internal interferences not to be taken into account.
4119	OS	SUI00006	SUI	LA LB LC LD LE LF LG LH LI
4120	OS	SUI00007	SUI	LA LB LC LD LE LF LG LH LI
4122	OS	SUI00009	SUI	LA LB LC LD LE LF LG LH LI
4123	OS	SUI00010	SUI	LA LB LC LD LE LF LG LH LI
4124	OS	SUI00011	SUI	LA LB LC LD LE LF LG LH LI
4125	OS	SUI00012	SUI	LA LB LC LD LE LF LG LH LI
4126	OS	SUI00013	SUI	LA LB LC LD LE LF LG LH LI
4128	OS	SUI00015	SUI	LA LB LC LD LE LF LG LH LI
4129	OS	SUI00016	SUI	LA LB LC LD LE LF LG LH LI
4130	OS	SUI00017	SUI	LA LB LC LD LE LF LG LH LI
4131	OS	SUI00018	SUI	LA LB LC LD LE LF LG LH LI
4132	OS	SUI00019	SUI	LA LB LC LD LE LF LG LH LI
4133	OS	SUI00020	SUI	LA LB LC LD LE LF LG LH LI
4134	OS	SUI00021	SUI	LA LB LC LD LE LF LG LH LI
4137	OS	SUI00024	SUI	LA LB LC LD LE LF LG LH LI
4139	OS	SUI00026	SUI	LA LB LC LD LE LF LG LH LI
4140	OS	SUI00027	SUI	LA LB LC LD LE LF LG LH LI
4141	OS	SUI00028	SUI	LA LB LC LD LE LF LG LH LI
4142	OS	SUI00029	SUI	LA LB LC LD LE LF LG LH LI
4143	OS	SUI00030	SUI	LA LB LC LD LE LF LG LH LI
4144	OS	SUI00031	SUI	LA LB LC LD LE LF LG LH LI
4145	OS	SUI00032	SUI	LA LB LC LD LE LF LG LH LI
4146	OS	SUI00033	SUI	LA LB LC LD LE LF LG LH LI
4147	OS	SUI00034	SUI	LA LB LC LD LE LF LG LH LI
4148	OS	SUI00035	SUI	LA LB LC LD LE LF LG LH LI
4149	OS	SUI00036	SUI	LA LB LC LD LE LF LG LH LI
4150	OS	SUI00037	SUI	LA LB LC LD LE LF LG LH LI
4151	OS	SUI00038	SUI	LA LB LC LD LE LF LG LH LI
4426	OS	F__03251	I	LE LF LG LH LI Subject to coordination prior to implementation
4467	OS	I__00325	F	LA LB LC LD LE LF LG LH LI
4469	OS	I__00328	F	LA LB LC LD LE LF LG LH LI
4470	OS	I__00329	F	LA LB LC LD LE LF LG LH LI
4479	OS	I__00335	GRC	LA LB LC LD LE LF LG LH LI
4490	OS	D__00094	SUI	LA LE BW13 /SUI30305 -2,9 , 30306 -2,9 , 30315 -3,5 , 30316 -3,5
4493	OS	D__00092	SUI	LI BW11/SUI500058 FIX41 -0,4 dB ,SUI50060 FIX -1,3 dB
4523	OS	D__00116	SUI	LI SUI50058 FIX 41 -7,2 dB
4574	OS	I__00319	HRV	12A 12B 12C 12D LA LB LC LD LE LF LG LI (1.5 GHz) Case by case coordination is obligatory.
4575	OS	I__00320	HRV	12A 12B 12C 12D LA LB LC LD LE LF LG LI (1,5 GHz) Case by case coordination is obligatory.
4576	OS	I__00321	HRV	12A 12B 12C 12D LA LB LC LD LE LF LG LH LI (1.5 GHz) Case by case coordination is obligatory.

4577	OS	I__00322	HRV	12A 12B 12C 12D LA LB LC LD LE LF LG LH LI (1.5 GHz) Case by case coordination is obligatory.
4578	OS	I__00323	HRV	12A 12B 12C 12D LA LB LC LD LE LF LG LH LI (1.5 GHz) Case by case coordination is obligatory.
4579	OS	I__00324	HRV	12A 12B 12C 12D LA LB LC LD LE LF LG LH LI (1.5 GHz) Case by case coordination is obligatory.
4580	OS	I__00325	HRV	12A 12B 12C 12D LA LB LC LD LE LF LG LH LI (1.5 GHz) Case by case coordination is obligatory.
4581	OS	I__00326	HRV	12A 12B 12C 12D LA LB LC LD LE LF LG LH LI (1.5 GHz) Case by case coordination is obligatory.
4582	OS	I__00327	HRV	12A 12B 12C 12D LA LB LC LD LE LF LG LH LI (1.5 GHz) Case by case coordination is obligatory.
4583	OS	I__00328	HRV	12A 12B 12C 12D LA LB LC LD LE LF LG LH LI (1.5 GHz) Case by case coordination is obligatory.
4584	OS	I__00329	HRV	12A 12B 12C 12D LA LB LC LD LE LF LG LH LI (1.5 GHz) Case by case coordination is obligatory.
4585	OS	I__00330	HRV	12A 12B 12C 12D LA LB LC LD LE LF LG LH LI (1.5 GHz) Case by case coordination is obligatory.
4586	OS	I__00331	HRV	12A 12B 12C 12D LA LB LC LD LE LF LG LH LI (1.5 GHz) Case by case coordination is obligatory.
4587	OS	I__00332	HRV	12A 12B 12C 12D LA LB LC LD LE LF LG LH LI (1.5 GHz) Case by case coordination is obligatory.
4588	OS	I__00333	HRV	12A 12B 12C 12D LA LB LC LD LE LF LG LH LI (1.5 GHz) Case by case coordination is obligatory.
4589	OS	I__00334	HRV	12A 12B 12C 12D LA LB LC LD LE LF LG LH LI (1.5 GHz) Case by case coordination is obligatory.
4590	OS	I__00335	HRV	12A 12B 12C 12D LA LB LC LD LE LF LG LH LI (1.5 GHz) Case by case coordination is obligatory.
4674	OS	SMR00002	HRV	LA LB LC LD LE LF LG LH LI LG* only after 2005
4917	OS	BEL20006	G	LF LH LI
4918	OS	BEL20004	G	LC LF LH LI
4919	OS	BEL10005	G	LB 6 dB attenuation in the direction of the affected UK-links from Belgium T-DAB service.
4920	OS	I__00327	F	LA LB LC LD LE LF LG LH LI Subject to coordination before implementation
4921	OS	I__00337	F	LA LB LC LD LE LF LG LH LI Subject to coordination before implementation
4927	OS	SUI00024	F	LA LC LD
4928	OS	SUI00027	F	LA LC LD
4939	OS	F__03113	SUI	LC LD On condition that French T-DAB does not interfere in the Swiss Fixed links.
4942	OS	F__03211	SUI	LC LD On condition that French T-DAB does not interfere in the Swiss Fixed links.
4956	OS	D__00124	G	LI D__00124 Niedersachsen 2S interferes with G__00371 49-26-BH, margin -11,5 dB on LI. United Kingdom agrees under condition of a further analysis and later confirmation.
4957	OS	F__03202	G	LA Subject to the France -UK coordination agreement.
4989	OS	BEL20005	G	LI

Part A2: List of Agreements originated from the Planning Meeting Maastricht, 2002

T-DAB and T-DAB

T-DAB_0001	The Administration of AUSTRIA agrees that the T-DAB requirements AUT01010 and AUT01042 may share a single DAB block.
T-DAB_0002	The Administration of AUSTRIA agrees that the T-DAB requirements AUT01020 and AUT01019 may share a single DAB block.
T-DAB_0003	The Administration of AUSTRIA agrees that the T-DAB requirements AUT01020 and AUT01034 may share a single DAB block.
T-DAB_0004	The Administration of AUSTRIA agrees that the T-DAB requirements AUT01020 and AUT01036 may share a single DAB block.
T-DAB_0005	The Administrations of AUSTRIA and SLOVENIA agreed between them that the T-DAB requirements AUT01021 and SVN10003 may share a single T-DAB block. The implementation (conversion into assignments) of both allotments will be such that the calculated field strengths of one allotment at any boundary test point of the other, will not accede the quoted permissible co-block interfering field strength of the victim allotment taking into account terrain data.
T-DAB_0006	The Administration of AUSTRIA agrees that the T-DAB requirements AUT01024 and AUT01046 may share a single DAB block.
T-DAB_0007	The Administration of AUSTRIA agrees that the T-DAB requirements AUT01030 and AUT01039 may share a single DAB block.
T-DAB_0008	The Administration of AUSTRIA agrees that the T-DAB requirements AUT01034 and AUT01036 may share a single DAB block.
T-DAB_0009	The Administration of AUSTRIA agrees that the T-DAB requirements AUT01039 and AUT01030 may share a single DAB block.
T-DAB_0010	The Administrations of AUSTRIA and CZECH REPUBLIC agreed between them that the T-DAB requirements AUT01040 and CZE00005 may share a single T-DAB block. The implementation (conversion into assignments) of both allotments will be such that the calculated field strengths of one allotment at any boundary test point of the other, will not accede the quoted permissible co-block interfering field strength of the victim allotment taking into account terrain data.
T-DAB_0011	The Administration of CZECH REPUBLIC agrees that the T-DAB requirements CZE00012 and CZE00010 may share a single DAB block.
T-DAB_0012	The Administration of CZECH REPUBLIC agrees that the T-DAB requirements CZE00018 and CZE00006 may share a single DAB block.
T-DAB_0013	The Administration of CZECH REPUBLIC agrees that the T-DAB requirements CZE00028 and CZE00015 may share a single DAB block.
T-DAB_0014	The Administration of DENMARK agrees that the T-DAB requirements DNK20013 and DNK20038 may share a single DAB block.
T-DAB_0015	The Administration of DENMARK agrees that the T-DAB requirements DNK20014 and DNK20021 may share a single DAB block.
T-DAB_0016	The Administration of DENMARK agrees that the T-DAB requirements DNK20015 and DNK20029 may share a single DAB block.
T-DAB_0017	The Administrations of DENMARK and GERMANY agreed between them that the T-DAB requirements DNK20016 and D__30004 may share a single T-DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0018	The Administration of DENMARK agrees that the T-DAB requirements DNK20022 and DNK20032 may share a single DAB block.
T-DAB_0019	The Administration of DENMARK agrees that the T-DAB requirements DNK20024 and DNK20012 may share a single DAB block.
T-DAB_0020	The Administrations of DENMARK and GERMANY agreed between them that the T-DAB requirements DNK20024 and D__30007 may share a single T-DAB block. Allotment DNK20024, using block LM, may not produce more than 43 dB(μV/m) at the requirement test points of allotment D__30007, calculated as PSM for 1% of the time. If this value is exceeded co-ordination must be undertaken.
T-DAB_0021	The Administration of DENMARK agrees that the T-DAB requirements DNK20025 and DNK20033 may share a single DAB block.
T-DAB_0022	The Administrations of DENMARK and GERMANY agreed between them that the T-DAB requirements DNK20026 and D__30097 may share a single T-DAB block.
T-DAB_0023	The Administration of DENMARK agrees that the T-DAB requirements DNK20029 and DNK20015 may share a single DAB block.
T-DAB_0024	The Administration of DENMARK agrees that the T-DAB requirements DNK20032 and DNK20051 may share a single DAB block.
T-DAB_0025	The Administration of DENMARK agrees that the T-DAB requirements DNK20033 and DNK20025 may share a single DAB block.
T-DAB_0026	The Administration of DENMARK agrees that the T-DAB requirements DNK20034 and DNK20052 may share a single DAB block.
T-DAB_0027	The Administration of DENMARK agrees that the T-DAB requirements DNK20035 and DNK21718 may share a single DAB block.

T-DAB_0028	The Administration of DENMARK agrees that the T-DAB requirements DNK20038 and DNK20040 may share a single DAB block.
T-DAB_0029	The Administration of DENMARK agrees that the T-DAB requirements DNK20040 and DNK20038 may share a single DAB block.
T-DAB_0030	The Administration of DENMARK agrees that the T-DAB requirements DNK20050 and DNK20035 may share a single DAB block.
T-DAB_0031	The Administration of DENMARK agrees that the T-DAB requirements DNK20051 and DNK20032 may share a single DAB block.
T-DAB_0032	The Administrations of DENMARK and NORWAY agreed between them that the T-DAB requirements DNK20052 and NOR00015 may share a single T-DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0033	The Administrations of DENMARK and GERMANY agreed between them that the T-DAB requirements DNK21718 and D__30096 may share a single T-DAB block. Allotment DNK21718, using block LN, may not produce more than 43 dB(μ V/m) at the requirement test points of allotment D__30096, calculated as PSM for 1% of the time. If this value is exceeded co-ordination must be undertaken.
T-DAB_0034	The Administrations of DENMARK and POLAND agreed between them that the T-DAB requirements DNK21718 and POL30016 may share a single T-DAB block. Allotment DNK21718 can use block LN on the condition that the total amount of outgoing interference (PSM value for 1% of the time) from DNK21718 in direction of the Polish allotment POL30016 is reduced by 10 dB compared to the PSM value resulting from a standard calculation of the outgoing interference using Reference Network 2.
T-DAB_0035	The Administrations of GERMANY and DENMARK agreed between them that the T-DAB requirements D__30004 and DNK20016 may share a single T-DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0036	The Administration of GERMANY agrees that the T-DAB requirements D__30027 and D__30030 may share a single DAB block.
T-DAB_0037	The Administration of GERMANY agrees that the T-DAB requirements D__30030 and D__30027 may share a single DAB block.
T-DAB_0038	The Administration of GERMANY agrees that the T-DAB requirements D__30037 and D__30104 may share a single DAB block.
T-DAB_0039	The Administration of GERMANY agrees that the T-DAB requirements D__30097 and D__30005 may share a single DAB block.
T-DAB_0040	The Administrations of GERMANY and SWEDEN agreed between them that the T-DAB requirements D__30097 and S__00016 may share a single T-DAB block. The cumulative interfering strength from the transmitters of the real network of the converted allotment D__30097 into assignments must not exceed a value of 41 dB(μ V/m) at the boundary test points describing the allotment S__00016, calculated for 1% time probability for the interfering field strength. If this value is intended to exceed then co-ordination is required.
T-DAB_0041	The Administrations of GERMANY and DENMARK agreed between them that the T-DAB requirements D__30098 and DNK20027 may share a single T-DAB block. Allotment D__30098, using block LO, may not produce more than 41 dB(μ V/m) at the requirement test points of allotment DNK20027, calculated as PSM for 1% of the time. If this value is exceeded co-ordination must be undertaken.
T-DAB_0042	The Administrations of GERMANY and DENMARK agreed between them that the T-DAB requirements D__30098 and DNK20016 may share a single T-DAB block. Allotment DNK20016, using block LO, may not produce more than 41 dB(μ V/m) at the requirement test points of allotment D__30098, calculated as PSM value for 1% of the time. If this value is exceeded co-ordination must be undertaken. Allotment D__30098, using block LO, may not produce more than 43 dB(μ V/m) at the requirement test points of allotment DNK20016, calculated as PSM value for 1% of the time. If this value is exceeded co-ordination must be undertaken.
T-DAB_0043	The Administrations of GERMANY and SWEDEN agreed between them that the T-DAB requirements D__30098 and S__00010 may share a single T-DAB block and can share the T-DAB frequency block LO on the condition that Germany has to co-ordinate all assignments within a distance of 35 km from the German coastline on a case basis with Sweden.
T-DAB_0044	The Administration of GERMANY agrees that the T-DAB requirements D__30104 and D__30037 may share a single DAB block.
T-DAB_0045	The Administration of GERMANY agrees that the T-DAB requirements D__30104 and D__30053 may share a single DAB block.
T-DAB_0046	The Administration of GERMANY agrees that the T-DAB requirements D__30106 and D__30108 may share a single DAB block.
T-DAB_0047	The Administration of GERMANY agrees that the T-DAB requirements D__30108 and D__30106 may share a single DAB block.
T-DAB_0048	The Administration of SPAIN agrees that the T-DAB requirements E__70148 and E__70239 may share a single DAB block.
T-DAB_0049	The Administration of SPAIN agrees that the T-DAB requirements E__70239 and E__70148 may share a single DAB block.

T-DAB_0050	The Administrations of SPAIN and FRANCE agreed between them that the T-DAB requirements E__70339 and F__03366 may share a single T-DAB block. The implementation (conversion into assignments) of both allotments will be such that the calculated field strength at any boundary test point of either allotment will not exceed a value of 41 dB(μ V/m).
T-DAB_0051	The Administrations of SPAIN and FRANCE agreed between them that the T-DAB requirements E__70348 and F__03367 may share a single T-DAB block. The implementation (conversion into assignments) of both allotments will be such that the calculated field strength at any boundary test point of either allotment will not exceed a value of 41 dB(μ V/m).
T-DAB_0052	The Administrations of SPAIN and FRANCE agreed between them that the T-DAB requirements E__70420 and F__03366 may share a single T-DAB block. The implementation (conversion into assignments) of both allotments will be such that the calculated field strength at any boundary test point of either allotment will not exceed a value of 41 dB(μ V/m).
T-DAB_0053	The Administration of SPAIN agrees that the T-DAB requirements E__70443 and E__70808 may share a single DAB block.
T-DAB_0054	The Administrations of SPAIN and FRANCE agreed between them that the T-DAB requirements E__70631 and F__03368 may share a single T-DAB block. The implementation (conversion into assignments) of both allotments will be such that the calculated field strength at any boundary test point of either allotment will not exceed a value of 41 dB(μ V/m).
T-DAB_0055	The Administrations of SPAIN and FRANCE agreed between them that the T-DAB requirements E__70648 and F__03161 may share a single T-DAB block. The implementation (conversion into assignments) of both allotments will be such that the calculated field strengths of one allotment at any boundary test point of the other, will not accede the quoted permissible co-block interfering field strength of the victim allotment.
T-DAB_0056	The Administrations of SPAIN and FRANCE agreed between them that the T-DAB requirements E__70707 and F__03365 may share a single T-DAB block. The implementation (conversion into assignments) of both allotments will be such that the calculated field strength at any boundary test point of either allotment will not exceed a value of 41 dB(μ V/m).
T-DAB_0057	The Administration of SPAIN agrees that the T-DAB requirements E__70807 and E__70843 may share a single DAB block.
T-DAB_0058	The Administration of SPAIN agrees that the T-DAB requirements E__71407 and E__70212 may share a single DAB block.
T-DAB_0059	The Administration of SPAIN agrees that the T-DAB requirements E__71607 and E__70117 may share a single DAB block.
T-DAB_0060	The Administrations of FINLAND and LATVIA agreed between them that the T-DAB requirements FIN40002 and LVA30006 may share a single T-DAB block. The implementation (conversion into assignments) of both allotments will be such that the calculated field strength at any boundary test point of either allotment will not exceed a value of 41 dB(μ V/m).
T-DAB_0061	The Administration of FRANCE agrees that the T-DAB requirements F__03334 and F__03332 may share a single DAB block.
T-DAB_0062	The Administrations of FRANCE and ITALY agreed between them that the T-DAB requirements F__03334 and I__09042 may share a single T-DAB block. The implementation (conversion into assignments) of both allotments will be such that the calculated field strength at any boundary test point of either allotment will not exceed a value of 45 dB(μ V/m).
T-DAB_0063	The Administrations of FRANCE and ITALY agreed between them that the T-DAB requirements F__03335 and I__09042 may share a single T-DAB block. The implementation (conversion into assignments) of both allotments will be such that the calculated field strength at any boundary test point of either allotment will not exceed a value of 45 dB(μ V/m).
T-DAB_0064	The Administration of FRANCE agrees that the T-DAB requirements F__03335 and F__03365 may share a single DAB block.
T-DAB_0065	The Administration of FRANCE agrees that the T-DAB requirements F__03335 and F__03334 may share a single DAB block.
T-DAB_0066	The Administrations of FRANCE and THE NETHERLANDS agreed between them that the T-DAB requirements F__03350 and HOL30713 may share a single T-DAB block. The implementation (conversion into assignments) of both allotments will be such that the calculated field strength at any boundary test point of either allotment will not exceed a value of 41 dB(μ V/m).
T-DAB_0067	The Administrations of FRANCE and THE NETHERLANDS agreed between them that the T-DAB requirements F__03350 and HOL30807 may share a single T-DAB block. The implementation (conversion into assignments) of both allotments will be such that the calculated field strength at any boundary test point of either allotment will not exceed a value of 41 dB(μ V/m).
T-DAB_0068	The Administrations of FRANCE and THE NETHERLANDS agreed between them that the T-DAB requirements F__03350 and HOL30904 may share a single T-DAB block. The implementation (conversion into assignments) of both allotments will be such that the calculated field strength at any boundary test point of either allotment will not exceed a value of 41 dB(μ V/m).
T-DAB_0069	The Administrations of FRANCE and SPAIN agreed between them that the T-DAB requirements F__03336 and E__71307 may share a single T-DAB block. The implementation (conversion into assignments) of both allotments will be such that the calculated field strength at any boundary test point of either allotment will not exceed a value of 41 dB(μ V/m).
T-DAB_0070	The Administrations of FRANCE and SPAIN agreed between them that the T-DAB requirements F__03340 and E__70333 may share a single T-DAB block. The implementation (conversion into assignments) of both allotments will be such that the calculated field strength at any boundary test point of either allotment will not exceed a value of 41 dB(μ V/m).
T-DAB_0071	The Administrations of FRANCE and UNITED KINGDOM agreed between them that the T-DAB requirements F__03344 and G__00001 may share a single T-DAB block. The implementation (conversion into assignments) of both allotments will be such that the calculated field strength at any boundary test point of either allotment will not exceed a value of 41 dB(μ V/m).
T-DAB_0072	The Administration of FRANCE agrees that the T-DAB requirements F__03347 and F__03302 may share a single DAB block.
T-DAB_0073	The Administration of FRANCE agrees that the T-DAB requirements F__03349 and F__03306 may share a single DAB block.
T-DAB_0074	The Administration of FRANCE agrees that the T-DAB requirements F__03349 and F__03346 may share a single DAB block.

T-DAB_0075	The Administration of GREECE agrees that the T-DAB requirements GRC30009 and GRC30007 may share a single DAB block.
T-DAB_0076	The Administration of GREECE agrees that the T-DAB requirements GRC30009 and GRC30036 may share a single DAB block.
T-DAB_0077	The Administration of GREECE agrees that the T-DAB requirements GRC30011 and GRC30003 may share a single DAB block.
T-DAB_0078	The Administration of GREECE agrees that the T-DAB requirements GRC30011 and GRC30033 may share a single DAB block.
T-DAB_0079	The Administration of GREECE agrees that the T-DAB requirements GRC30011 and GRC30037 may share a single DAB block.
T-DAB_0080	The Administration of GREECE agrees that the T-DAB requirements GRC30011 and GRC30059 may share a single DAB block.
T-DAB_0081	The Administration of GREECE agrees that the T-DAB requirements GRC30014 and GRC30025 may share a single DAB block.
T-DAB_0082	The Administration of GREECE agrees that the T-DAB requirements GRC30014 and GRC30045 may share a single DAB block.
T-DAB_0083	The Administration of GREECE agrees that the T-DAB requirements GRC30014 and GRC30056 may share a single DAB block.
T-DAB_0084	The Administration of GREECE agrees that the T-DAB requirements GRC30029 and GRC30006 may share a single DAB block.
T-DAB_0085	The Administration of GREECE agrees that the T-DAB requirements GRC30029 and GRC30015 may share a single DAB block.
T-DAB_0086	The Administration of GREECE agrees that the T-DAB requirements GRC30038 and GRC30008 may share a single DAB block.
T-DAB_0087	The Administration of GREECE agrees that the T-DAB requirements GRC30051 and GRC30050 may share a single DAB block.
T-DAB_0088	The Administrations of UNITED KINGDOM and FRANCE agreed between them that the T-DAB requirements G__00001 and F__03344 may share a single T-DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0089	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00005 and G__00094 may share a single DAB block.
T-DAB_0090	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00006 and G__00081 may share a single DAB block.
T-DAB_0091	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00007 and G__00041 may share a single DAB block.
T-DAB_0092	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00019 and G__00123 may share a single DAB block.
T-DAB_0093	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00021 and G__00080 may share a single DAB block.
T-DAB_0094	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00021 and G__00083 may share a single DAB block.
T-DAB_0095	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00029 and G__00199 may share a single DAB block.
T-DAB_0096	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00030 and G__00052 may share a single DAB block.
T-DAB_0097	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00030 and G__00066 may share a single DAB block.
T-DAB_0098	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00030 and G__00111 may share a single DAB block.
T-DAB_0099	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00030 and G__00045 may share a single DAB block.
T-DAB_0100	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00031 and G__00081 may share a single DAB block.
T-DAB_0101	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00032 and G__00036 may share a single DAB block.
T-DAB_0102	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00032 and G__00082 may share a single DAB block.
T-DAB_0103	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00033 and G__00083 may share a single DAB block.
T-DAB_0104	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00033 and G__00021 may share a single DAB block.
T-DAB_0105	The Administrations of UNITED KINGDOM and THE NETHERLANDS agreed between them that the T-DAB requirements G__00034 and HOL30704 may share a single T-DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0106	The Administrations of UNITED KINGDOM and THE NETHERLANDS agreed between them that the T-DAB requirements G__00034 and HOL30807 may share a single T-DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments

T-DAB_0107	The Administrations of UNITED KINGDOM and THE NETHERLANDS agreed between them that the T-DAB requirements G__00034 and HOL30809 may share a single T-DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0108	The Administrations of UNITED KINGDOM and THE NETHERLANDS agreed between them that the T-DAB requirements G__00034 and HOL30708 may share a single T-DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0109	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00035 and G__00044 may share a single DAB block.
T-DAB_0110	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00036 and G__00082 may share a single DAB block.
T-DAB_0111	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00036 and G__00032 may share a single DAB block.
T-DAB_0112	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00037 and G__00085 may share a single DAB block.
T-DAB_0113	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00037 and G__00006 may share a single DAB block.
T-DAB_0114	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00038 and G__00068 may share a single DAB block.
T-DAB_0115	The Administrations of UNITED KINGDOM and THE NETHERLANDS agreed between them that the T-DAB requirements G__00042 and HOL30806 may share a single T-DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0116	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00045 and G__00066 may share a single DAB block.
T-DAB_0117	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00045 and G__00052 may share a single DAB block.
T-DAB_0118	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00046 and G__00044 may share a single DAB block.
T-DAB_0119	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00046 and G__00050 may share a single DAB block.
T-DAB_0120	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00048 and G__00007 may share a single DAB block.
T-DAB_0121	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00052 and G__00030 may share a single DAB block.
T-DAB_0122	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00055 and G__00048 may share a single DAB block.
T-DAB_0123	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00059 and G__00195 may share a single DAB block.
T-DAB_0124	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00062 and G__00126 may share a single DAB block.
T-DAB_0125	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00063 and G__00014 may share a single DAB block.
T-DAB_0126	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00065 and G__00273 may share a single DAB block.
T-DAB_0127	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00065 and G__00060 may share a single DAB block.
T-DAB_0128	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00066 and G__00070 may share a single DAB block.
T-DAB_0129	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00066 and G__00030 may share a single DAB block.
T-DAB_0130	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00067 and G__00063 may share a single DAB block.
T-DAB_0131	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00067 and G__00014 may share a single DAB block.
T-DAB_0132	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00067 and G__00075 may share a single DAB block.
T-DAB_0133	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00068 and G__00038 may share a single DAB block.

T-DAB_0134	The Administrations of UNITED KINGDOM and IRELAND agreed between them that the T-DAB requirements G__00069 and IRL80029 may share a single T-DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0135	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00073 and G__00273 may share a single DAB block.
T-DAB_0136	The Administrations of UNITED KINGDOM and THE NETHERLANDS agreed between them that the T-DAB requirements G__00081 and HOL30808 may share a single T-DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0137	The Administrations of UNITED KINGDOM and THE NETHERLANDS agreed between them that the T-DAB requirements G__00081 and HOL31011 may share a single T-DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0138	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00083 and G__00021 may share a single DAB block.
T-DAB_0139	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00083 and G__00052 may share a single DAB block.
T-DAB_0140	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00083 and G__00087 may share a single DAB block.
T-DAB_0141	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00085 and G__00037 may share a single DAB block.
T-DAB_0142	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00100 and G__00264 may share a single DAB block.
T-DAB_0143	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00104 and G__00260 may share a single DAB block.
T-DAB_0144	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00105 and G__00240 may share a single DAB block.
T-DAB_0145	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00111 and G__00017 may share a single DAB block.
T-DAB_0146	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00114 and G__00064 may share a single DAB block.
T-DAB_0147	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00119 and G__00122 may share a single DAB block.
T-DAB_0148	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00121 and G__00265 may share a single DAB block.
T-DAB_0149	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00122 and G__00119 may share a single DAB block.
T-DAB_0150	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00123 and G__00019 may share a single DAB block.
T-DAB_0151	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00124 and G__00127 may share a single DAB block.
T-DAB_0152	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00126 and G__00062 may share a single DAB block.
T-DAB_0153	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00127 and G__00124 may share a single DAB block.
T-DAB_0154	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00143 and G__00139 may share a single DAB block.
T-DAB_0155	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00147 and G__00160 may share a single DAB block.
T-DAB_0156	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00163 and G__00219 may share a single DAB block.
T-DAB_0157	The Administrations of UNITED KINGDOM and IRELAND agreed between them that the T-DAB requirements G__00163 and IRL80023 may share a single T-DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0158	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00165 and G__00267 may share a single DAB block.
T-DAB_0159	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00178 and G__00263 may share a single DAB block.

T-DAB_0160	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00195 and G__00059 may share a single DAB block.
T-DAB_0161	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00195 and G__00062 may share a single DAB block.
T-DAB_0162	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00199 and G__00029 may share a single DAB block.
T-DAB_0163	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00217 and G__00223 may share a single DAB block.
T-DAB_0164	The Administrations of UNITED KINGDOM and IRELAND agreed between them that the T-DAB requirements G__00219 and IRL80023 may share a single T-DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0165	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00220 and G__00061 may share a single DAB block.
T-DAB_0166	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00223 and G__00217 may share a single DAB block.
T-DAB_0167	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00228 and G__00270 may share a single DAB block.
T-DAB_0168	The Administrations of UNITED KINGDOM and THE NETHERLANDS agreed between them that the T-DAB requirements G__00232 and HOL30202 may share a single T-DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0169	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00236 and G__00251 may share a single DAB block.
T-DAB_0170	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00240 and G__00105 may share a single DAB block.
T-DAB_0171	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00258 and G__00261 may share a single DAB block.
T-DAB_0172	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00260 and G__00104 may share a single DAB block.
T-DAB_0173	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00261 and G__00258 may share a single DAB block.
T-DAB_0174	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00263 and G__00178 may share a single DAB block.
T-DAB_0175	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00264 and G__00100 may share a single DAB block.
T-DAB_0176	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00265 and G__00121 may share a single DAB block.
T-DAB_0177	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00265 and G__00269 may share a single DAB block.
T-DAB_0178	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00269 and G__00265 may share a single DAB block.
T-DAB_0179	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00270 and G__00228 may share a single DAB block.
T-DAB_0180	The Administrations of UNITED KINGDOM and IRELAND agreed between them that the T-DAB requirements G__00271 and IRL80028 may share a single T-DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0181	The Administration of HUNGARY agrees that the T-DAB requirements HNG30026 and HNG30032 may share a single DAB block.
T-DAB_0182	The Administration of HUNGARY agrees that the T-DAB requirements HNG30032 and HNG30026 may share a single DAB block.
T-DAB_0183	The Administrations of THE NETHERLANDS and UNITED KINGDOM agreed between them that the T-DAB requirements HOL30202 and G__00232 may share a single T-DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0184	The Administration of THE NETHERLANDS agrees that the T-DAB requirements HOL30401 and HOL30703 may share a single DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0185	The Administration of THE NETHERLANDS agrees that the T-DAB requirements HOL30408 and HOL30507 may share a single DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments

[illegible]

T-DAB_0210	The Administrations of CROATIA and ITALY agreed between them that the T-DAB requirements HRV31108 and I__14011 may share a single T-DAB block.
T-DAB_0211	The Administrations of CROATIA and SLOVENIA agreed between them that the T-DAB requirements HRV31108 and SVN10005 may share a single T-DAB block. The implementation (conversion into assignments) of both allotments will be such that the calculated field strengths of one allotment at any boundary test point of the other, will not exceed the quoted permissible co-block interfering field strength of the victim allotment.
T-DAB_0212	The Administration of CROATIA agrees that the T-DAB requirements HRV31310 and HRV31109 may share a single DAB block.
T-DAB_0213	The Administration of CROATIA agrees that the T-DAB requirements HRV31310 and HRV31110 may share a single DAB block.
T-DAB_0214	The Administration of CROATIA agrees that the T-DAB requirements HRV31408 and HRV31208 may share a single DAB block.
T-DAB_0215	The Administration of CROATIA agrees that the T-DAB requirements HRV31408 and HRV31409 may share a single DAB block.
T-DAB_0216	The Administrations of IRELAND and UNITED KINGDOM agreed between them that the T-DAB requirements IRL80009 and G__00238 may share a single T-DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0217	The Administrations of IRELAND and UNITED KINGDOM agreed between them that the T-DAB requirements IRL80011 and G__00222 may share a single T-DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0218	The Administrations of IRELAND and UNITED KINGDOM agreed between them that the T-DAB requirements IRL80023 and G__00219 may share a single T-DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0219	The Administrations of IRELAND and UNITED KINGDOM agreed between them that the T-DAB requirements IRL80023 and G__00163 may share a single T-DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0220	The Administrations of IRELAND and UNITED KINGDOM agreed between them that the T-DAB requirements IRL80028 and G__00271 may share a single T-DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0221	The Administrations of IRELAND and UNITED KINGDOM agreed between them that the T-DAB requirements IRL80029 and G__00069 may share a single T-DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0222	The Administration of ITALY agrees that the T-DAB requirements I__03022 and I__03041 may share a single DAB block. The implementation (conversion into assignments) of both allotments will be such that the calculated field strength at any boundary test point of either allotment will not exceed a value of 45 dB(μ V/m).
T-DAB_0223	The Administration of ITALY agrees that the T-DAB requirements I__03022 and I__03103 may share a single DAB block. The implementation (conversion into assignments) of both allotments will be such that the calculated field strength at any boundary test point of either allotment will not exceed a value of 45 dB(μ V/m).
T-DAB_0224	The Administration of ITALY agrees that the T-DAB requirements I__03041 and I__03022 may share a single DAB block. The implementation (conversion into assignments) of both allotments will be such that the calculated field strength at any boundary test point of either allotment will not exceed a value of 45 dB(μ V/m).
T-DAB_0225	The Administration of ITALY agrees that the T-DAB requirements I__03103 and I__03022 may share a single DAB block. The implementation (conversion into assignments) of both allotments will be such that the calculated field strength at any boundary test point of either allotment will not exceed a value of 45 dB(μ V/m).
T-DAB_0226	The Administration of ITALY agrees that the T-DAB requirements I__04023 and I__05051 may share a single DAB block. The implementation (conversion into assignments) of both allotments will be such that the calculated field strength at any boundary test point of either allotment will not exceed a value of 45 dB(μ V/m).
T-DAB_0227	The Administrations of ITALY and CROATIA agreed between them that the T-DAB requirements I__05012 and HRV31108 may share a single T-DAB block.
T-DAB_0228	The Administrations of ITALY and SLOVENIA agreed between them that the T-DAB requirements I__05041 and SVN10010 may share a single T-DAB block. The implementation (conversion into assignments) of both allotments will be such that the calculated field strength at any boundary test point of either allotment will not exceed a value of 45 dB(μ V/m).
T-DAB_0229	The Administration of ITALY agrees that the T-DAB requirements I__05051 and I__04023 may share a single DAB block. The implementation (conversion into assignments) of both allotments will be such that the calculated field strength at any boundary test point of either allotment will not exceed a value of 45 dB(μ V/m).
T-DAB_0230	The Administration of ITALY agrees that the T-DAB requirements I__07011 and I__09052 may share a single DAB block. The implementation (conversion into assignments) of both allotments will be such that the calculated field strength at any boundary test point of either allotment will not exceed a value of 45 dB(μ V/m).
T-DAB_0231	The Administration of ITALY agrees that the T-DAB requirements I__07012 and I__09061 may share a single DAB block. The implementation (conversion into assignments) of both allotments will be such that the calculated field strength at any boundary test point of either allotment will not exceed a value of 45 dB(μ V/m).

- [illegible]

- [illegible]

[illegible]

T-DAB_0291	The Administrations of MOLDOVA and UKRAINE agreed between them that the T-DAB requirements MDA15010 and UKR00067 may share a single T-DAB block .The implementation (conversion into assignments) of both allotments will be such that the calculated field strengths of one allotment at any boundary test point of the other, will not accede the quoted permissible co-block interfering field strength of the victim allotment.			
T-DAB_0292	The Administration of MOLDOVA agrees that the T-DAB requirements MDA15011 and MDA15008 may share a single DAB block.			
T-DAB_0293	The Administrations of NORWAY and SWEDEN agreed between them that the T-DAB requirements NOR00011 and S__00002 may share a single T-DAB block. This agreement requires that Sweden uses reference network 2 for their allotment. Regarding the assignments of the Swedish transmitters, the following technical characteristics should be met. Uddevalla, position: 11E5552, 58N2126 antenna height: 100 m erp: 1000W Munkedal, position: 11E4042, 58N2801 antenna height: 50 m erp: 300W Kungshamn, position: 11E1535, 58N2141 antenna height: 50 m erp: 300W In the case of the transmitters Munkedal and Kungshamn, the e.r.p. should exceed 50 W in the sector 330 degrees - 360 degrees.			
T-DAB_0294	The Administrations of NORWAY and DENMARK agreed between them that the T-DAB requirements NOR00013 and DNK20039 may share a single T-DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments			
T-DAB_0295	The Administration of NORWAY agrees that the T-DAB requirements NOR00013 and NOR00026 may share a single DAB block.			
T-DAB_0296	The Administrations of NORWAY and DENMARK agreed between them that the T-DAB requirements NOR00014 and DNK20051 may share a single T-DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments			
T-DAB_0297	The Administration of NORWAY agrees that the T-DAB requirements NOR00014 and NOR00034 may share a single DAB block.			
T-DAB_0298	The Administrations of NORWAY and DENMARK agreed between them that the T-DAB requirements NOR00015 and DNK20052 may share a single T-DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments			
T-DAB_0299	The Administrations of NORWAY and DENMARK agreed between them that the T-DAB requirements NOR00016 and DNK20038 may share a single T-DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments			
T-DAB_0300	The Administration of NORWAY agrees that the T-DAB requirements NOR00016 and NOR00021 may share a single DAB block.			
T-DAB_0301	The Administration of NORWAY agrees that the T-DAB requirements NOR00017 and NOR00040 may share a single DAB block.			
T-DAB_0302	The Administration of NORWAY agrees that the T-DAB requirements NOR00020 and NOR00038 may share a single DAB block.			
T-DAB_0303	The Administration of NORWAY agrees that the T-DAB requirements NOR00021 and NOR00016 may share a single DAB block.			
T-DAB_0304	The Administration of NORWAY agrees that the T-DAB requirements NOR00026 and NOR00013 may share a single DAB block.			
T-DAB_0305	The Administration of NORWAY agrees that the T-DAB requirements NOR00027 and NOR00029 may share a single DAB block.			
T-DAB_0306	The Administration of NORWAY agrees that the T-DAB requirements NOR00029 and NOR00027 may share a single DAB block.			
T-DAB_0307	The Administration of NORWAY agrees that the T-DAB requirements NOR00034 and NOR00014 may share a single DAB block.			
T-DAB_0308	The Administrations of NORWAY and SWEDEN agreed between them that the T-DAB requirements NOR00035 and S__00001 may share a single T-DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments			
T-DAB_0309	The Administration of NORWAY agrees that the T-DAB requirements NOR00038 and NOR00020 may share a single DAB block.			
T-DAB_0310	The Administrations of NORWAY and DENMARK agreed between them that the T-DAB requirements NOR00039 and DNK20037 may share a single T-DAB block Each allotment will accept the interference generated by the quoted reference network of the other allotments. This agreement requires that Norway uses reference network 2 for their allotment.			
T-DAB_0311	The Administration of NORWAY agrees that the T-DAB requirements NOR00039 and NOR00019 may share a single DAB block.			
T-DAB_0312	The Administration of NORWAY agrees that the T-DAB requirements NOR00039 and NOR00045 may share a single DAB block.			

T-DAB_0313	The Administration of NORWAY agrees that the T-DAB requirements NOR00039 and NOR00049 may share a single DAB block.
T-DAB_0314	The Administration of NORWAY agrees that the T-DAB requirements NOR00040 and NOR00017 may share a single DAB block.
T-DAB_0315	The Administrations of NORWAY and SWEDEN agreed between them that the T-DAB requirements NOR00041 and S__00006 may share a single T-DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0316	The Administrations of NORWAY and SWEDEN agreed between them that the T-DAB requirements NOR00044 and S__00002 may share a single T-DAB block. This agreement requires that Sweden uses reference network 2 for their allotment.
T-DAB_0317	The Administrations of NORWAY and DENMARK agreed between them that the T-DAB requirements NOR00054 and DNK20043 may share a single T-DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0318	The Administration of NORWAY agrees that the T-DAB requirements NOR00064 and NOR00072 may share a single DAB block.
T-DAB_0319	The Administration of NORWAY agrees that the T-DAB requirements NOR00072 and NOR00064 may share a single DAB block.
T-DAB_0320	The Administration of NORWAY agrees that the T-DAB requirements NOR00072 and NOR00079 may share a single DAB block.
T-DAB_0321	The Administration of NORWAY agrees that the T-DAB requirements NOR00079 and NOR00072 may share a single DAB block.
T-DAB_0322	The Administration of NORWAY agrees that the T-DAB requirements NOR00079 and NOR00087 may share a single DAB block.
T-DAB_0323	The Administrations of NORWAY and SWEDEN agreed between them that the T-DAB requirements NOR00080 and S__00046 may share a single T-DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0324	The Administration of NORWAY agrees that the T-DAB requirements NOR00087 and NOR00079 may share a single DAB block.
T-DAB_0325	The Administrations of POLAND and SWEDEN agreed between them that the T-DAB requirements POL30013 and S__00020 may share a single T-DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0326	The Administrations of POLAND and SWEDEN agreed between them that the T-DAB requirements POL30016 and S__00020 may share a single T-DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0327	The Administration of SWITZERLAND agrees that the T-DAB requirements SUI00106 and SUI00113 may share a single DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0328	The Administration of SWITZERLAND agrees that the T-DAB requirements SUI00108 and SUI00114 may share a single DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0329	The Administration of SWITZERLAND agrees that the T-DAB requirements SUI00110 and SUI00111 may share a single DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0330	The Administration of SWITZERLAND agrees that the T-DAB requirements SUI00110 and SUI00102 may share a single DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0331	The Administrations of SWITZERLAND and FRANCE agreed between them that the T-DAB requirements SUI00110 and F__03316 may share a single T-DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0332	The Administration of SWITZERLAND agrees that the T-DAB requirements SUI00113 and SUI00106 may share a single DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0333	The Administration of SWITZERLAND agrees that the T-DAB requirements SUI00114 and SUI00108 may share a single DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0334	The Administrations of SLOVENIA and AUSTRIA agreed between them that the T-DAB requirements SVN10003 and AUT01021 may share a single T-DAB block The implementation (conversion into assignments) of both allotments will be such that the calculated field strengths of one allotment at any boundary test point of the other, will not accede the quoted permissible co-block interfering field strength of the victim allotment taking into account terrain data.
T-DAB_0335	The Administrations of SLOVENIA and CROATIA agreed between them that the T-DAB requirements SVN10005 and HRV31108 may share a single T-DAB block. The implementation (conversion into assignments) of both allotments will be such that the calculated field strengths of one allotment at any boundary test point of the other, will not accede the quoted permissible co-block interfering field strength of the victim allotment.

T-DAB_0336	The Administrations of SLOVENIA and ITALY agreed between them that the T-DAB requirements SVN10010 and I__05041 may share a single T-DAB block. The implementation (conversion into assignments) of both allotments will be such that the calculated field strength at any boundary test point of either allotment will not exceed a value of 45 dB(μ V/m).
T-DAB_0337	The Administrations of SWEDEN and DENMARK agreed between them that the T-DAB requirements S__00001 and DNK20047 may share a single T-DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0338	The Administrations of SWEDEN and NORWAY agreed between them that the T-DAB requirements S__00001 and NOR00035 may share a single T-DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0339	The Administration of SWEDEN agrees that the T-DAB requirements S__00001 and S__00056 may share a single DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0340	The Administrations of SWEDEN and DENMARK agreed between them that the T-DAB requirements S__00002 and DNK20011 may share a single T-DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0341	The Administrations of SWEDEN and DENMARK agreed between them that the T-DAB requirements S__00003 and DNK20045 may share a single T-DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0342	The Administration of SWEDEN agrees that the T-DAB requirements S__00004 and S__00069 may share a single DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0343	The Administrations of SWEDEN and DENMARK agreed between them that the T-DAB requirements S__00005 and DNK20033 may share a single T-DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0344	The Administrations of SWEDEN and NORWAY agreed between them that the T-DAB requirements S__00006 and NOR00041 may share a single T-DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0345	The Administrations of SWEDEN and DENMARK agreed between them that the T-DAB requirements S__00008 and DNK20025 may share a single T-DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0347	The Administration of SWEDEN agrees that the T-DAB requirements S__00012 and S__00025 may share a single DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0348	The Administration of SWEDEN agrees that the T-DAB requirements S__00013 and S__00026 may share a single DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0349	The Administrations of SWEDEN and LITHUANIA agreed between them that the T-DAB requirements S__00013 and LTU30032 may share a single T-DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0350	The Administration of SWEDEN agrees that the T-DAB requirements S__00014 and S__00062 may share a single DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0351	The Administrations of SWEDEN and GERMANY agreed between them that the T-DAB requirements S__00016 and D__30005 may share a single T-DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0352	The Administrations of SWEDEN and DENMARK agreed between them that the T-DAB requirements S__00017 and DNK20037 may share a single T-DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0353	The Administrations of SWEDEN and POLAND agreed between them that the T-DAB requirements S__00020 and POL30013 may share a single T-DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0354	The Administrations of SWEDEN and POLAND agreed between them that the T-DAB requirements S__00020 and POL30016 may share a single T-DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0355	The Administration of SWEDEN agrees that the T-DAB requirements S__00025 and S__00012 may share a single DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0356	The Administration of SWEDEN agrees that the T-DAB requirements S__00026 and S__00013 may share a single DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0357	The Administrations of SWEDEN and NORWAY agreed between them that the T-DAB requirements S__00046 and NOR00080 may share a single T-DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments

T-DAB_0358	The Administrations of SWEDEN and DENMARK agreed between them that the T-DAB requirements S__00056 and DNK20047 may share a single T-DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0359	The Administration of SWEDEN agrees that the T-DAB requirements S__00056 and S__00001 may share a single DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0360	The Administration of SWEDEN agrees that the T-DAB requirements S__00062 and S__00014 may share a single DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0361	The Administration of SWEDEN agrees that the T-DAB requirements S__00069 and S__00004 may share a single DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0362	The Administrations of TURKEY and ROMANIA agreed between them that the T-DAB requirements TUR00002 and ROU00014 may share a single T-DAB block.
T-DAB_0363	The Administration of TURKEY agrees that the T-DAB requirements TUR00003 and TUR00002 may share a single DAB block.
T-DAB_0364	The Administration of TURKEY agrees that the T-DAB requirements TUR00003 and TUR70008 may share a single DAB block.
T-DAB_0365	The Administrations of FRANCE and SPAIN agreed between them that the T-DAB requirements F__03366 and E__70420 may share a single T-DAB block. The implementation (conversion into assignments) of both allotments will be such that the calculated field strength at any boundary test point of either allotment will not exceed a value of 41 dB(μ V/m).
T-DAB_0366	The Administrations of FRANCE and SPAIN agreed between them that the T-DAB requirements F__03366 and E__70339 may share a single T-DAB block. The implementation (conversion into assignments) of both allotments will be such that the calculated field strength at any boundary test point of either allotment will not exceed a value of 41 dB(μ V/m).
T-DAB_0367	The Administrations of FRANCE and THE NETHERLANDS agreed between them that the T-DAB requirements F__03301 and HOL30714 may share a single T-DAB block. The implementation (conversion into assignments) of both allotments will be such that the calculated field strength at any boundary test point of either allotment will not exceed a value of 41 dB(μ V/m).
T-DAB_0368	The Administrations of FRANCE and UNITED KINGDOM agreed between them that the T-DAB requirements F__03245 and G__00053 may share a single T-DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0369	The Administrations of UNITED KINGDOM and IRELAND agreed between them that the T-DAB requirements G__00238 and IRL80009 may share a single T-DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0370	The Administrations of UNITED KINGDOM and IRELAND agreed between them that the T-DAB requirements G__00222 and IRL80011 may share a single T-DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0371	The Administrations of UNITED KINGDOM and FRANCE agreed between them that the T-DAB requirements G__00053 and F__03245 may share a single T-DAB block. Each allotment will accept the interference generated by the quoted reference network of the other allotments
T-DAB_0372	The Administrations of BELGIUM and FRANCE agreed between them that the T-DAB requirements BEL00008 and F__03350 may share a single T-DAB block. Allotment F__03350 will accept interference corresponding to the reference network of allotment BEL00008 in the area defined by the following testpoints: 002E06/51N00;002E30/50N38;001E55/50N15. The allotment F__03350 will be constrained in its implementation such that the calculated field strength at any boundary test point of allotment BEL00008 will not exceed a value of 41 dB(μ V/m).
T-DAB_0373	The Administrations of BELGIUM and THE NETHERLANDS agreed between them that the T-DAB requirements BEL10005 and HOL30709 may share a single T-DAB block. Allotment BEL10005 will accept interference corresponding to the reference network of allotment HOL30709, and will be constrained in its implementation such that the calculated field strength at any boundary test point of allotment HOL30709 will not exceed a value of 45 dB(μ V/m)
T-DAB_0401	The Administrations of UNITED KINGDOM and IRELAND agreed between them that the T-DAB requirements G__00148 and may share a single T-DAB block LI
T-DAB_0402	The Administrations of UNITED KINGDOM and IRELAND agreed between them that the T-DAB requirements G__00143 and may share a single T-DAB block LP
T-DAB_0403	The Administrations of IRELAND and UNITED KINGDOM agreed between them that the T-DAB requirements IRL80023 and may share a single T-DAB block LH
T-DAB_0404	The Administration of UNITED KINGDOM agrees that the T-DAB requirements G__00006 and G__00085 may share a DAB block LN.
T-DAB_0405	The Administration of SPAIN agrees that the T-DAB requirement E__70246 can use the DAB block LO
T-DAB_0406	The Administration of SPAIN agrees that the T-DAB requirement E__70120 can use the DAB block LJ
T-DAB_0407	The Administration of SPAIN agrees that the T-DAB requirement E__70420 can use the DAB block LN
T-DAB_0408	The Administration of SPAIN agrees that the T-DAB requirement E__70139 can use the DAB block LJ
T-DAB_0409	The Administration of SPAIN agrees that the T-DAB requirement E__70339 can use the DAB block LN

T-DAB_0410	The Administration of SPAIN agrees that the T-DAB requirement E__70148 can use the DAB block LL
T-DAB_0411	The Administration of SPAIN agrees that the T-DAB requirement E__70648 can use the DAB block LD
T-DAB_0412	The Administration of ROMANIA agrees that the T-DAB requirement ROU30115 can use the DAB block LB
T-DAB_0413	The Administration of SLOVAK REPUBLIC agrees that the T-DAB requirement SVK0307 can use the DAB block LH
T-DAB_0414	The Administrations of AUSTRIA and GERMANY agreed between them that the T-DAB requirement AUT01038 may use a single T-DAB block LK The administration of Germany and Austria agree, that for the Austrian Allotment AUT01038 Salzburg the frequency block LK instead of the frequency block LO may be used.
T-DAB_0415	The Administrations of GERMANY and DENMARK agreed between them that the T-DAB requirements D__30097 and may share a single T-DAB block LK Allotment D__30097, using block LK, produces no negative margins at any requirements test points of Danish allotment areas.
T-DAB_0416	The Administrations of THE NETHERLANDS and GERMANY agreed between them that the T-DAB requirements: HOL30806 may use a T-DAB block LA HOL30810 may use a T-DAB block LC HOL30811 may use a T-DAB block LC HOL30901 may use a T-DAB block LD HOL30903 may use a T-DAB block LD HOL30201 may use a T-DAB block LG HOL30202 may use a T-DAB block LI It is assumed that for co-block protection, the cumulative interfering field strength from the transmitters of the real network of the converted allotments HOL30806; HOL30810; HOL30811; HOL30901; HOL30903; HOL30201; HOL30202 into assignments will not exceed a value of 41dBμV/m at the boundary test points describing any potential concerned German co-block allotment of the updated plan WI95, calculated for 1% time probability for the interfering field strength.
T-DAB_0417	The Administrations of THE NETHERLANDS and DENMARK agreed between them that the T-DAB requirements HOL30806 may use a T-DAB block LA HOL30810 may use a T-DAB block LC HOL30811 may use a T-DAB block LC HOL30901 may use a T-DAB block LD HOL30903 may use a T-DAB block LD HOL30201 may use a T-DAB block LG HOL30201 and DNK20029 may share a single T-DAB block. HOL30202 may use a T-DAB block LI HOL30202 and DNK20028 may share a single T-DAB block.
T-DAB_0418	The Administrations of THE NETHERLANDS and FRANCE agreed between them that the T-DAB requirements HOL30806 may use a T-DAB block LA HOL30810 may use a T-DAB block LC HOL30811 may use a T-DAB block LC HOL30901 may use a T-DAB block LD HOL30903 may use a T-DAB block LD HOL30201 may use a T-DAB block LG HOL30202 may use a T-DAB block LI
T-DAB_0419	The Administrations of THE NETHERLANDS and BELGIUM agreed between them that the T-DAB requirements HOL30806 may use a T-DAB block LA HOL30810 may use a T-DAB block LC HOL30811 may use a T-DAB block LC HOL30901 may use a T-DAB block LD HOL30903 may use a T-DAB block LD HOL30201 may use a T-DAB block LG HOL30202 may use a T-DAB block LI Ok for this proposal. Definitive agreement after full analysis.
T-DAB_0420	The Administrations of THE NETHERLANDS and UNITED KINGDOM agreed between them that the T-DAB requirements HOL30806 may use a T-DAB block LA HOL30810 may use a T-DAB block LC HOL30811 may use a T-DAB block LC HOL30901 may use a T-DAB block LD HOL30903 may use a T-DAB block LD HOL30201 may use a T-DAB block LG HOL30202 may use a T-DAB block LI HOL30202 and G__00232 may share a single T-DAB block.

T-DAB and Other Services

- OS_0501** The Administrations of DENMARK and GERMANY agreed between them that the T-DAB requirement DNK20016 may use T-DAB block LO. D__WF4 is affected by a margin of -1.0 dB. If this value is exceeded before 31 December 2005 then co-ordination is required.
- OS_0502** The Administrations of DENMARK and GERMANY agreed between them that the T-DAB requirement DNK20027 may use T-DAB block LO. The margin of -0.1 dB is accepted by Germany.
- OS_0503** The Administrations of DENMARK and GERMANY agreed between them that the T-DAB requirement DNK21718 may use T-DAB block LN. D__WF4 is affected by a margin of -1.8 dB. If this value is exceeded fore 31 December 2005 then co-ordination is required.
- OS_0505** The Administrations of SLOVAK REPUBLIC and HUNGARY agreed the following concerning SVK_DAB_BB3 and the other service HNG F3. They agree that in the co-ordination process concerning the implementation (conversion into assignments) of the SVK T-DAB allotment the calculated field strength of the assignments will be based on terrain data.
- OS_0506** The Administrations of SLOVAK REPUBLIC and HUNGARY agreed the following concerning SVK_DAB_BA3 and the other service HNG F3. They agree that in the co-ordination process concerning the implementation (conversion into assignments) of the SVK T-DAB allotment the calculated field strength of the assignments will be based on terrain data.
- OS_0507** The Administrations of SLOVAK REPUBLIC and HUNGARY agreed the following concerning SVK_DAB_NI3 and the other service HNG F3. They agree that in the co-ordination process concerning the implementation (conversion into assignments) of the SVK T-DAB allotment the calculated field strength of the assignments will be based on terrain data.
- OS_0511** The Administrations of CZECH REPUBLIC and UKRAINE agreed the following concerning CZE00015 and the other service UKR WXR. They agree between them that the implementation (conversion into assignments) of the CZE T-DAB allotment will be such that the calculated field strength of the assignment at any boundary test point will take into account the terrain data.
- OS_0512** The Administrations of SLOVAK REPUBLIC and UKRAINE agreed the following concerning SVK00301 and the other service UKR XR. They agree between them that the implementation (conversion into assignments) of the SVK T-DAB allotment will be such that the calculated field strength of the assignments at the border of Ukraine will take into account the terrain data.
- OS_0513** The Administrations of SLOVAK REPUBLIC and UKRAINE agreed the following concerning SVK00302 and the other service UKR XR. They agree between them that the implementation (conversion into assignments) of the SVK T-DAB allotment will be such that the calculated field strength of the assignments at the border of Ukraine will take into account the terrain data.
- OS_0514** The Administrations of SLOVAK REPUBLIC and UKRAINE agreed the following concerning SVK00305 and the other service UKR XR. They agree between them that the implementation (conversion into assignments) of the SVK T-DAB allotment will be such that the calculated field strength of the assignments at the border of Ukraine will take into account the terrain data.
- OS_0515** The Administrations of ITALY and FRANCE agreed the following concerning I__01011 and the other service F__FB. They agree between them that co-ordination of Italy is required with France (Other Service FB, digital point-to-point telephone system, IRT 1500) if T-DAB are implemented before 2008 for the following allotments:
- I__01011, TORINO_1 (LB);
I__01012, TORINO_2 (LE);
I__01022, ALESSANDRIA_2 (LA);
I__01031, ASTI_1 (LD);
I__01051, CUNEO_1 (LD);
I__02011, AOSTA_1 (LA);
I__02011, AOSTA_2 (LB);
- Remark: If only digital point-to-point telephone system is concerned, then no co-ordination is required. France shall notify to Italy any cessation of any of its other service (FB), and communicate information on existing ones.
-

SKLEPNE LISTINE
zasedanja
konference CEPT o T-DAB (4)
Maastricht 2002

Posebni dogovor Evropske konference uprav za pošto in telekomunikacije (CEPT) o uporabi radiofrekvenčnega pasu 1452–1479,5 MHz za prizemno digitalno zvokovno radiodifuzijo (T-DAB)

UVOD

Delegati uprav konference CEPT, ki predstavljajo te države članice Mednarodne telekomunikacijske zveze (ITU):

Republiko Avstrijo, Kraljevino Belgijo, Republiko Bolgarijo, Republiko Ciper, Češko republiko, Republiko Hrvaško, Kraljevino Dansko, Republiko Estonijo, Republiko Finsko, Francosko republiko, Helensko republiko, Republiko Madžarsko, Irsko, Italijansko republiko, Republiko Latvijo, Kneževino Lihtenštajn, Republiko Litvo, Veliko vojvodstvo Luksemburg, Republiko Malto, Republiko Moldovo, Zvezno republiko Nemčijo, Kraljevino Nizozemsko, Kraljevino Norveško, Republiko Poljsko, Portugalsko republiko, Romunijo, Republiko San Marino, Slovaško republiko, Republiko Slovenijo, Kraljevino Španijo, Kraljevino Švedsko, Švicarsko konfederacijo, Republiko Turčijo, Ukrajino, Združeno kraljestvo Velika Britanija in Severna Irska ter Vatikansko mestno državo,

ki so se junija 2002 v Maastrichtu udeležili zasedanja o načrtovanju T-DAB, sklicanega v skladu s 6. členom Pravilnika o radiokomunikacijah zveze ITU in na podlagi odločitve odbora za elektronske komunikacije konference CEPT, da skliče to zasedanje,

so se s podpisom teh sklepnih listin na tem zasedanju ali z uporabo določb člena 2.2 dogovorili:

1. člen

Sprejme se besedilo posebnega dogovora iz priloge k tem sklepnim listinam, imenovano Posebni dogovor, Maastricht 2002.

2. člen

2.1 Posebni dogovor iz priloge začne veljati ob 0001^h po UTC 1. septembra 2002 in je zavezujoč samo za pogodbene uprave, ki so podpisale te sklepne listine ali pristopile k posebnemu dogovoru po tem, ko je začel veljati v skladu z določbami svojega 7. člena.

2.2 Vsaka uprava članica konference CEPT, ki ni mogla podpisati teh sklepnih listin med sedanjim zasedanjem ali jih je podpisala pod pogojem, da jih podpiše, potrdi, jih lahko podpiše ali pisno potrdi svoj podpis najpozneje do 2400^h po UTC dne 31. avgusta 2002. Podpis mora biti brez pridržkov, razen če ga je treba ratificirati. Agencija za radiokomunikacije Kraljevine Nizozemske bo o tej možnosti uradno obvestila vse uprave članice konference CEPT, ki niso sodelovale na tem zasedanju o načrtovanju. Vsaka uprava članica konference CEPT, ki želi uporabiti ta postopek, mora ustrezno obvestiti Agencijo za radiokomunikacije Kraljevine Nizozemske, ki bo ustrezno ukrepala za dopisno izvedbo podpisa.

3. člen

Predsedujoči odbora ECC v skladu s točko 6.5 Pravilnika o radiokomunikacijah prek svoje uprave obvesti generalnega sekretarja zveze ITU o sprejetju in vsebini posebnega dogovora, vključno z imeni uprav, ki so podpisale te sklepne listine, ki vsebujejo priloženi dogovor, ali ki so pristopile k Posebnemu dogovoru, Maastricht 2002.

V DOKAZ NAVEDENEGA so pravilno pooblaščen predstavniki uprav članic konference CEPT podpisali izvirmike teh sklepnih listin v angleškem, francoskem in nemškem jeziku, ki se hranijo v arhivih Agencije za radiokomunikacije Kraljevine Nizozemske, ta pa pošlje izvod vsaki upravi pogodbenici.

V Maastrichtu, 18. junija 2002

PRILOGA

Posebni dogovor
Evropske konference uprav za pošto in telekomunikacije (CEPT)
o uporabi radiofrekvenčnega pasu 1452–1479,5 MHz
za prizemno digitalno zvokovno radiodifuzijo (T-DAB)

Maastricht 2002

ZASEDANJE KONFERENCE CEPT O NAČRTOVANJU T-DAB (4)

MAASTRICHT 2002

Posebni dogovor
Evropske konference uprav za pošto in telekomunikacije (CEPT) o
uporabi radiofrekvenčnega pasu 1452–1479,5 MHz za prizemno digitalno zvokovno radiodifuzijo (T-DAB)

UVOD

Delegati uprav konference CEPT, ki predstavljajo te države članice Mednarodne telekomunikacijske zveze (ITU):

Republiko Avstrijo, Kraljevino Belgijo, Republiko Bolgarijo, Republiko Ciper, Češko republiko, Republiko Hrvaško, Kraljevino Dansko, Republiko Estonijo, Republiko Finsko, Francosko republiko, Helensko republiko, Republiko Madžarsko, Irsko, Italijansko republiko, Republiko Latvijo, Kneževino Lihtenštajn, Republiko Litvo, Veliko vojvodstvo Luksemburg, Republiko Malto, Republiko Moldovo, Zvezno republiko Nemčijo, Kraljevino Nizozemsko, Kraljevino Norveško, Republiko Poljsko, Portugalsko republiko, Romunijo, Republiko San Marino, Slovaško republiko, Republiko Slovenijo, Kraljevino Španijo, Kraljevino Švedsko, Švicarsko konfederacijo, Republiko Turčijo, Ukrajino, Združeno kraljestvo Velika Britanija in Severna Irska ter Vatikansko mestno državo,

so sprejeli naslednje določbe o radiodifuzni storitvi (T-DAB) v radiofrekvenčnem pasu 1452–1479,5 MHz z območja načrtovanja, določenega v 1. členu tega posebnega dogovora in v načrtu razdelitve za T-DAB.

1. ČLEN

Pomen izrazov

V tem posebnem dogovoru imajo izrazi naslednji pomen:

- 1.1 ITU:** Mednarodna telekomunikacijska zveza;
- 1.2 Urad za radiokomunikacije:** Urad za radiokomunikacije zveze ITU (ITU-BR);
- 1.3 Pravilnik o radiokomunikacijah:** radiokomunikacijski predpisi (izdaja 2001);
- 1.4 CEPT:** Evropska konferenca uprav za pošto in telekomunikacije;
- 1.5 ECC:** Odbor za elektronske komunikacije konference CEPT;
- 1.6 ERO:** Evropski urad za radiokomunikacije;
- 1.7 posebni dogovor:** ta posebni dogovor in njegove priloge;

- 1.8** *uprava pogodbenica*: vsaka uprava države članice zveze ITU, ki je potrdila ta posebni dogovor ali pristopila k njemu;
- 1.9** *uprava*: če ni drugače navedeno, izraz *uprava* označuje upravo, kot je opredeljena v Ustavi zveze ITU;
- 1.10** *načrt*: načrt v Prilogi 1 tega posebnega dogovora skupaj s poznejšimi spremembami;
- 1.11** *območje načrtovanja*: ozemlja uprav pogodbenic;
- 1.12** *razdelitev*: vnos v načrt frekvenčnega bloka, ki je namenjen upravi, da ga uporablja za T-DAB na območju razdelitve po pogojih, podrobno določenih v ustreznih prilogah. Vsaka razdelitev se lahko ob upoštevanju tehničnih meril iz Priloge 4 uporabi za eno ali več dodelitev;
- 1.13** *območje razdelitve*: območje pokrivanja razdelitve z mejami, določenimi z geografskimi koordinatami, ki se vežejo na to razdelitev;
- 1.14** *dodelitev*: vsaka dodelitev, uspešno izvedena po postopku iz 6. člena;
- 1.15** *seznam dodelitev T-DAB*: seznam dodelitev T-DAB, usklajenih in priglašениh v skladu s tem posebnim dogovorom;
- 1.16** *organ za upravljanje načrta*: ERO, ki mu je ECC naložil opravljanje postopkov iz tega posebnega dogovora;
- 1.17** *zasedanje CEPT T-DAB o načrtovanju, Wiesbaden 1995*: zasedanje konference CEPT, na katerem so bile sprejete sklepne listine s posebnim dogovorom Evropske konference uprav za pošto in telekomunikacije (CEPT) o uporabi radiofrekvenčnih pasov 47–68 MHz, 87,5–108 MHz, 174–230 MHz, 230–240 MHz in 1452–1492 MHz za uvedbo prizemne digitalne zvokovne radiodifuzije (T-DAB);
- 1.18** *zasedanje CEPT T-DAB o načrtovanju (2), Bonn 1996*: zasedanje konference CEPT, na katerem so bile sprejete sklepne listine z revizijo nekaterih delov Posebnega dogovora, Wiesbaden 1995;
- 1.19** *zasedanje CEPT T-DAB o načrtovanju (3), Maastricht 2002*: zasedanje konference CEPT, na katerem so bile sprejete sklepne listine z revizijo nekaterih delov Posebnega dogovora, Wiesbaden 1995, revidiranih v Bonnu 1996;
- 1.20** *Chestrsko zasedanje*: zasedanje, na katerem je bil sprejet Chesterski večstranski usklajevalni sporazum iz leta 1997 o tehničnih merilih, načelih usklajevanja in postopkih za uvajanje prizemne digitalne videoradiodifuzije (DVB-T), Chester, 25. julij 1997.

2. ČLEN

Izvajanje posebnega dogovora

- 2.1** Uprave pogodbenice za svoje postaje T-DAB v pasu 1452–1479,5 MHz uporabljajo tehnične podlage, podrobno določene v Prilogi 2 tega posebnega dogovora.
- 2.2** Uprave pogodbenice ne spreminjajo svojih razdelitev, razen če to storijo po pogojih iz 4. člena tega posebnega dogovora.
- 2.3** Uprave pogodbenice lahko dajo v uporabo dodelitve v pasu 1452–479,5 MHz v skladu s svojim načrtom razdelitev in samo pod pogoji iz 6. člena tega posebnega dogovora.
- 2.4** Uprave pogodbenice se zavezujejo, da bodo preučile in v medsebojnem soglasju uveljavile ukrepe, potrebne za odpravo težav, ki bi lahko nastale ob uporabi tega posebnega dogovora.

3. ČLEN

Priloge k posebnemu dogovoru

Posebni dogovor ima te priloge:

3.1 *Priloga 1:* načrt razdelitve frekvenčnega bloka T-DAB

Načrt razdelitve frekvenc za postaje T-DAB uprav pogodbenic v pasu 1452–1479,5 MHz s frekvenčnimi razdelitvami in pripadajočimi karakteristikami postaj T-DAB, usklajenih

- na zasedanju o načrtovanju CEPT T-DAB, Wiesbaden 1995, ali
- z uporabo določb iz Posebnega dogovora, Wiesbaden 1995, ali
- na zasedanju o načrtovanju CEPT T-DAB (4), ali
- z uporabo določb iz Posebnega dogovora, Maastricht 2002.

3.2 *Druge priloge*

Priloga 2: Tehnične podlage za načrtovanje T-DAB

Priloga 3 A: Osnovne karakteristike razdelitev T-DAB, ki se navedejo ob spremembi Načrta razdelitev

Priloga 3 B: Osnovne karakteristike dodelitev T-DAB, ki se navedejo pri prevedbi razdelitev v eno ali več dodelitev

Priloga 4: Tehnični postopki za usklajevanje

4. ČLEN

Postopek za spreminjanje načrta

4.1 Načrt razdelitev za T-DAB, usklajen

- na zasedanju o načrtovanju CEPT T-DAB, Wiesbaden 1995, ali
- z uporabo določb iz Posebnega dogovora, Wiesbaden 1995, ali
- na zasedanju o načrtovanju CEPT T-DAB (4),

se lahko spreminja v skladu s postopkom iz tega člena. Organ za upravljanje načrta v imenu odbora ECC v ta namen vzdržuje glavni načrt z vsemi njegovimi spremembami.

4.2 Če želi uprava spremeniti načrt, uporabi naslednji postopek.

4.3 Predlagana sprememba načrta lahko vsebuje:

4.3.1 spremembo karakteristik razdelitev v načrtu;

4.3.2 vključitev nove razdelitve v načrt;

4.3.3 izbris razdelitve iz načrta.

4.4 Za spremembe v načrtu mora zadevna uprava:

4.4.1 ugotoviti, katere uprave bodo prizadete, ob upoštevanju ustreznih določb v zvezi z načrtom;

4.4.2 poslati zadevnim upravam zaprosilo za soglasje, v katerem navede podatke, naštete v Prilogi 3 A;

4.4.3 poslati izvod tega zaprosila organu za upravljanje načrta ob upoštevanju določb iz 4.6.

4.4.4 Ukrepi v skladu s točkami 4.4.1, 4.4.2 in 4.4.3 se izvedejo ne prej kot štiri leta pred datumom, na katerega se načrtuje, da se predlagana sprememba prevede v dodelitev, in ne pozneje kot 20 tednov pred tem datumom.

- 4.5 Soglasje iz 4.4 ni potrebno, če predlagana sprememba pomeni:
- 4.5.1 izbris razdelitve iz načrta;
 - 4.5.2 spremembo, ki zmanjšuje območje razdelitev.
- 4.6 Uprava, ki predlaga spremembo načrta, pošlje podatke iz Priloge 3 A organu za upravljanje načrta in v njej odvisno od primera navede:
- 4.6.1 imena uprav, s katerimi se je posvetovala v skladu s točko 4.4;
 - 4.6.2 da ni treba pridobiti soglasja o uskladitvi z nobeno upravo v skladu s točko 4.5.
- 4.7 Organ za upravljanje načrta objavi celotno informacijo po prejemu izvoda zaprosila v skladu s točko 4.4.
- 4.8 Po prejemu objavljene informacije uprava, ki meni, da bi morala biti vključena v zaprosilo za soglasje, v šestih mesecih po datumu objave sporoči upravi prosilki svojo utemeljitev glede tega in o tem obvesti organ za upravljanje načrta z zahtevo, da se vključi tudi njeno ime.
- 4.9 Uprava, ki prosi za soglasje, in uprave, ki naj bi soglasje izdale, lahko zahtevajo dodatne podatke, za katere menijo, da so pomembni.
- 4.10 Na prošnjo za usklajevanje (4.4) je treba odgovoriti v dvanajstih tednih po datumu objave ali neposredne prošnje.
- 4.10.1 Če v tem obdobju ni bilo nobenega odgovora, se pošlje nujni opomin.
 - 4.10.2 Če tudi v dveh tednih po tem opominu ni nobenega odgovora, se šteje, da se uprava, ki je bila zaprosena za usklajevanje, strinja s predlagano spremembo. Zaprosilo se zavrne z obrazložitvijo.
- 4.11 Ko organ za upravljanje načrta dobi od uprave, ki je prosila za usklajevanje, uradno obvestilo o izidu usklajevanja in ugotovi, da se je ta postopek uspešno končal s pridobitvijo soglasja zadevnih uprav ali z uporabo točke 4.10, tedaj posodobi glavni izvod načrta. Nova ali spremenjena razdelitev v načrtu ima nato enak status kot druge v načrtu in se šteje za skladno z načrtom.
- 4.12 Organ za upravljanje načrta na zahtevo pošilja izvod popravljenega načrta skupaj s posodobljenim seznamom dodelitev v šestmesečnih presledkih vsem upravam pogodbenicam in predsedujočemu odbora ECC, ki pošlje izvod generalnemu sekretarju zveze ITU.
- 4.13 Če sprememba razdelitve po prevedbi v dodelitev, čeprav izvedena v skladu z določbami tega člena, povzroči storitvam drugih uprav škodljivo motenje, sprejme uprava, ki je začela uporabljati dodelitev, v sodelovanju s prizadeto upravo potrebne ukrepe za odpravo takega motenja v skladu z ustreznimi določbami Pravilnika o radiokomunikacijah.
- 4.14 Uprave pošiljajo informacije organu za upravljanje načrta v elektronski obliki. Za sporočanje osnovnih karakteristik razdelitev T-DAB se uporablja oblika zapisa, določena v Prilogi 3.

5. ČLEN

Združljivost radiokomunikacijskih storitev in njihovo medsebojno vplivanje

Oddelek 1: Storitve T-DAB moti druge radiokomunikacijske storitve

- 5.1 Vsaka uprava, ki namerava prevesti razdelitev v eno ali več dodelitev v skladu s 6. členom tega posebnega dogovora v pasu 1452–1479,5 MHz, pridobi soglasje uprav pogodbenic, katerih druge radiokomunikacijske storitve bi utegnile biti prizadete. Vendar pa tako soglasje ni potrebno, če je dodelitev T-DAB v okviru ustrezne razdelitve in mejne vrednosti iz nadaljnjih pododdelkov niso presežene.

- 5.1.1** Predlagana dodelitev frekvenčnega bloka T-DAB bo verjetno prizadela sprejem *postaj v mobilni storitvi, razen postaj v letalski mobilni storitvi*, ki obratujejo v pasu 1452–1492 MHz v skladu s Pravilnikom o radiokomunikacijah na primarni bazi, če so presežene ustrezne mejne vrednosti iz Priloge 2.
- 5.1.2** Predlagana dodelitev frekvenčnega bloka T-DAB bo verjetno prizadela sprejem *postaj v fiksni storitvi*, ki obratujejo v pasu 1452–1492 MHz v skladu s Pravilnikom o radiokomunikacijah na primarni bazi, če so presežene ustrezne mejne vrednosti iz Priloge 2.
- 5.1.3** Predlagana dodelitev frekvenčnega bloka T-DAB bo verjetno prizadela sprejem *postaj v letalski mobilni storitvi*, ki obratujejo izključno za potrebe telemetrije v pasu 1452–1492 MHz v skladu s št. 5.342 Pravilnika o radiokomunikacijah, če so presežene ustrezne mejne vrednosti iz Priloge 2.
- 5.1.4** Predlagana dodelitev frekvenčnega bloka T-DAB bo verjetno prizadela sprejem *postaj v radiodifuzni satelitski storitvi*, ki obratujejo v pasu 1452–1492 MHz v skladu z resolucijo 528 (WARC 92), če so presežene ustrezne mejne vrednosti iz Priloge 2.

Oddelek 2: Druge radiokomunikacijske storitve motijo storitev T-DAB

- 5.2** Vsaka uprava, ki namerava vključiti v obratovanje postajo z drugo radiokomunikacijsko storitvijo v skladu s tem posebnim dogovorom, mora pridobiti soglasje drugih uprav pogodbenic, katerih razdelitve T-DAB bi utegnile biti prizadete.
- 5.2.1** Predlagana dodelitev postaji v mobilni storitvi bo verjetno prizadela razdelitve T-DAB v pasu 1452–1479,5 MHz, ki so v skladu s tem posebnim dogovorom, če so presežene ustrezne mejne vrednosti iz Priloge 2.
- 5.2.2** Predlagana dodelitev postaji v fiksni storitvi bo verjetno prizadela razdelitve T-DAB v pasu 1452–1479,5 MHz, ki so v skladu s tem posebnim dogovorom, če so presežene ustrezne mejne vrednosti iz Priloge 2.
- 5.2.3** Predlagana dodelitev postaji v letalski mobilni storitvi, ki obratuje v skladu s št. 5.342 Pravilnika o radiokomunikacijah, bo verjetno prizadela razdelitve T-DAB v pasu 1452–1479,5 MHz, ki so v skladu s tem posebnim dogovorom, če so presežene ustrezne mejne vrednosti iz Priloge 2.

6. ČLEN

Prevedba razdelitve v eno ali več dodelitev ter pripadajoči usklajevalni in priglasitveni postopki

Oddelek 1: Temeljna načela za prevedbo razdelitve v eno ali več dodelitev

- 6.1.1** Če namerava uprava prevesti razdelitev, ki je v skladu s tem posebnim dogovorom, v eno ali več dodelitev ali spremeniti dodelitev storitve T-DAB, mora z uporabo postopkov iz Priloge 4 ugotoviti, ali ta dodelitev presega mejne vrednosti poljske jakosti ustrezne razdelitve v načrtu. Če mejne vrednosti niso presežene, usklajevanje ni potrebno in se uporabi postopek iz oddelka 2 tega člena. Sicer je potrebno usklajevanje po postopku iz oddelka 3.
- 6.1.2** Če namerava uprava izbrisati določeno dodelitev s seznama dodelitev, se uporabi isti postopek kot za izbris razdelitve (glej 4. člen).

Oddelek 2: Primeri, ko se usklajevanje ne zahteva

- 6.2.1** Uprava pošlje podrobne podatke o predlagani novi ali spremenjeni dodelitvi organu za upravljanje načrta, ki jih objavi.
- 6.2.2** Uprava, ki meni, da bi bilo usklajevanje potrebno, o tem v šestih tednih po datumu objave s primerno obrazložitvijo obvesti upravo prosilko in pošlje izvod tega obvestila tudi organu za upravljanje načrta.
- 6.2.3** Če v šestih mesecih po datumu objave ni nobenih zahtev za usklajevanje, organ za upravljanje načrta na podlagi zahteve uprave vključi to dodelitev na seznam dodelitev T-DAB.

Oddelek 3: Primeri, ko se usklajevanje zahteva

- 6.3.1** Uprava z uporabo postopkov iz Priloge 4 ugotovi, katere uprave bi utegnile biti prizadete, in jim nato pošlje zaprosilo za usklajevanje. Podrobni podatki iz Priloge 3 B o predlagani novi ali spremenjeni dodelitvi se skupaj z imeni uprav, s katerimi se je poskušalo usklajevati, pošljejo tudi organu za upravljanje načrta, ki jih objavi.
- 6.3.2** Po prejemu te objave lahko uprava, ki meni, da je tudi prizadeta, o tem v šestih tednih z ustrezno obrazložitvijo obvesti upravo prosilko in organ za upravljanje načrta.
- 6.3.3** Odgovori na zahtevo za usklajevanje se pošljejo v dvanajstih tednih. Če v tem obdobju ni odgovora, se pošlje nujni opomin. Če v dveh tednih po tem opominu ni odgovora, se šteje, da se uprava, s katero se je poskušalo usklajevati, strinja s predlagano dodelitvijo.
- 6.3.4** Uprava prosilka in prizadete uprave sporazumno odločijo o potrebnosti uporabe postopka iz 4. člena za spremembo načrta.
- 6.3.5** Če se zadevne uprave odločijo, da ni treba uporabiti postopka iz 4. člena, ker je bilo soglasje o tehničnih karakteristikah dodelitve doseženo med posvetovanji, uprava prosilka o teh tehničnih karakteristikah obvesti organ za upravljanje načrta. Za to dodelitev se šteje, da je v skladu z načrtom, in organ za upravljanje načrta jo vključi na seznam dodelitev T-DAB.
- 6.3.6** Če se zadevne uprave odločijo, da je treba uporabiti postopek iz 4. člena, uprava prosilka uporabi postopek iz 4. člena in o tem primerno obvesti organ za upravljanje načrta.

Oddelek 4: Usklajevanje novih dodelitev in izbris dodelitev postajam drugih radiokomunikacijskih storitev

- 6.4.1** Uprava lahko kadarkoli dodeli frekvence postajam drugih radiokomunikacijskih storitev v pasu 1452–1479,5 MHz pod pogojem, da ne presegajo ustreznih mejnih vrednosti iz Priloge 2. Če jih presegajo, morajo za to pridobiti soglasje vsake prizadete uprave z dvostranskimi ali večstranskimi sporazumi.
- 6.4.2** Če namerava uprava izbrisati dodelitev postaji, ali kjer je primerno, storitvenemu območju drugih radiokomunikacijskih storitev v pasu 1452–1479,5 MHz, o tem obvesti uprave, s katerimi je izvedla usklajevanje te postaje ali storitvenega območja. Uprava o tem obvesti tudi organ za upravljanje načrta.

Oddelek 5: Priglasitev dodelitev T-DAB Uradu za radiokomunikacije

- 6.5.1** Ko uprava pogodbenica predlaga začetek uporabe dodelitve T-DAB v skladu s tem posebnim dogovorom, poskusi pridobiti soglasje uprav, ki niso pogodbenice in katerih storitve utegnejo biti prizadete. Izid usklajevanja se ob priglasitvi dodelitve T-DAB pošlje v skladu z določbami 11. člena Pravilnika o radiokomunikacijah Uradu za radiokomunikacije. Uprava pogodbenica tudi izjavi, da je dodelitev v skladu s tem posebnim dogovorom.
- 6.5.2** Urad za radiokomunikacije ne obravnava obvestil o dodelitvah T-DAB, ki so v skladu s tem posebnim dogovorom, glede škodljivega motenja, ki prizadeva dodelitve ali ki ga povzročajo dodelitve, ki so zapisane v Glavni register zveze ITU v imenu uprav pogodbenic.
- 6.5.3** Obvestila o dodelitvah T-DAB, ki so v skladu s tem posebnim dogovorom v pasu 1452–1479,5 MHz, vsebujejo posebno sklicevanje na to, da bo postaja obratovala v skladu z določbami Resolucije 528 (WARC-92) o odnosih z upravami, ki niso pogodbenice.

Oddelek 6: Status dodelitev T-DAB na seznamu dodelitev

- 6.6.1** Pri odnosih med upravami pogodbenicami imajo dodelitve T-DAB, ki so del načrta in vključene na seznam dodelitev T-DAB, isti status in tako stopnjo zaščite, kot je opredeljena v tehničnih prilogah k temu posebnemu dogovoru, ne glede na datum, ko so začele delovati.
- 6.6.2** Pri odnosih med upravami pogodbenicami se status in zaščita dodelitev T-DAB v pasu 1452–1479,5 MHz, kot sta opisana v točki 6.6.1, ne bosta spremenila, ko bodo začeli veljati določbe prihodnjega načrta za radiodifuzno satelitsko storitev (zvokovno) in postopki za usklajeno uporabo komplementarne prizemne radiodifuzije, kot to predvideva Resolucija 528 (WARC-92). Vseeno pa se uporabljajo določbe sedanjega Pravilnika o radiokomunikacijah pri odnosih z upravami, ki niso pogodbenice.

Oddelek 7: Izmenjava podatkov

- 6.7** Uprave pošiljajo podatke organu za upravljanje načrta v elektronski obliki. Za predložitev osnovnih karakteristik dodelitev T-DAB se uporabi oblika zapisa, določena v Dodatku 2 k Prilogi 3.

7. ČLEN

Pristop k posebnemu dogovoru

- 7.1** Vsaka uprava konference CEPT, ki ni podpisala posebnega dogovora, lahko kadarkoli deponira listino o pristopu pri predsedujočem odbora ECC, ki o tem takoj obvesti druge uprave. Pristop k posebnemu dogovoru je brez pridržkov in velja za načrt, kakršen je ob pristopu.
- 7.2** Pristop k posebnemu dogovoru začne veljati na dan, ko predsedujoči odbora ECC prejme listino o pristopu.

8. ČLEN

Področje uporabe posebnega dogovora

- 8.1** Posebni dogovor obvezuje uprave pogodbenice pri njihovih medsebojnih odnosih, ne obvezuje pa jih v njihovih odnosih z upravami, ki niso pogodbenice.
- 8.2** Če uprava pogodbenica da pridržke glede katerekoli določbe tega posebnega dogovora, drugim upravam pogodbenicam ni treba upoštevati teh določb v svojih odnosih z upravo, ki je dala take pridržke.

9. ČLEN

Uradno obvestilo zvezi ITU o sklenitvi posebnega dogovora

- 9** Predsedujoči odbora ECC prek svoje uprave v skladu s točko 6.5 Pravilnika o radiokomunikacijah uradno obvesti generalnega sekretarja zveze ITU o sklenitev tega posebnega dogovora in navede podrobne podatke o:
- vsaki upravi, ki odpoveduje ta posebni dogovor;
 - prenehanju veljavnosti tega posebnega dogovora;
 - vsaki upravi, ki pristopa k temu posebnemu dogovoru.

10. ČLEN

Odpoved posebnega dogovora

- 10.1** Vsaka uprava pogodbenica lahko kadarkoli odpove ta posebni dogovor z uradnim obvestilom, poslanim predsedujočemu odbora ECC, ki o tem obvesti druge uprave pogodbenice.
- 10.2** Odpoved začne veljati eno leto po datumu, na katerega prejme predsedujoči odbora ECC uradno obvesti o odpovedi.
- 10.3** Organ za upravljanje načrta na dan, ko začne odpoved veljati, izbriše iz načrta razdelitve tiste razdelitve, ki so bile vnesene vanj v imenu uprave, ki odpoveduje ta posebni dogovor.

11. ČLEN

Revizija posebnega dogovora

- 11** O reviziji tega posebnega dogovora, razen o spremembah načrta v skladu s 4. členom, odločajo samo uprave pogodbenice na zasedanju konference CEPT, ki ga v skladu s svojimi postopki skliče odbor ECC in nanj povabi vsaj vse uprave pogodbenice.

12. ČLEN

Začetek veljavnosti in trajanje posebnega dogovora ter drugih določb

- 12.1** Ta posebni dogovor začne veljati ob 0001^h po UTC 1. septembra 2002.
- 12.2** Ta posebni dogovor in priloženi načrt sta sestavljena tako, da izpolnujeta zahteve za T-DAB.
- 12.3** Ta posebni dogovor velja, dokler ga uprave pogodbenice ne razveljavijo na zasedanju konference CEPT, ki ga v skladu s svojimi postopki skliče odbor ECC in nanj povabi vse uprave pogodbenice.
- 12.4** To besedilo je v angleščini, francoščini in nemščini, pri čemer so vse različice enako verodostojne.

13. ČLEN

Primeri, ko se zahteva ratifikacija

- 13.1** Za nekatere uprave postane ta posebni dogovor zavezujoč šele, ko ga ratificirajo zadevne države v skladu s svojo veljavno zakonodajo.
- 13.2** Listina o ratifikaciji se čim prej deponira pri Agenciji za radiokomunikacije Kraljevine Nizozemske, ki o vsakem takem deponiranju obvesti uprave pogodbenice.

PRILOGA 1

Načrt razdelitev frekvenčnega bloka T-DAB

Razdelitve, ki izvirajo z zasedanja o načrtovanju, Wiesbaden 1995, ali iz uporabe določb iz Posebnega dogovora, Wiesbaden 1995, so v 1. delu te priloge.

Razdelitve, ki izvirajo z zasedanja o načrtovanju, Maastricht 2002, so v 2. delu te priloge.

1. V 1. delu zvezdici v 1. in 2. stolpcu, ki imata naslov Usklajevanje, potrebno pred uvedbo zahtev za T-DAB, pomenita naslednje:

1. stolpec:	potrebno usklajevanje s službo za letalsko telemetrijo (XR) Ruske federacije (glej tč. 5.342 Pravilnika o radiokomunikacijah);
2. stolpec:	drugi splošni pogoji za usklajevanje.

Stolpec z naslovom Opombe navaja uprave, s katerimi je potrebno usklajevanje.

V 2. delu zvezdice v 1. do 9. stolpcu, ki imajo naslov Usklajevanje, potrebno pred uvedbo zahtev za T-DAB, pomenijo naslednje:

1. stolpec:	potrebno usklajevanje s službo za letalsko telemetrijo (XR) Ruske federacije (glej tč. 5.342 Pravilnika o radiokomunikacijah);
2. stolpec:	potrebno usklajevanje s službo za letalsko telemetrijo (XU) Ukrajine v skladu s št. 5.342 Pravilnika o radiokomunikacijah. V pasu 1452–1479,5 MHz bo Ukrajina po fazah ukinjala storitev letalske telemetrije do leta 2020;
3. stolpec:	potrebno usklajevanje z Nemčijo (F4), če se uvedejo pred letom 2006;
4. stolpec:	potrebno usklajevanje s Portugalsko (FA), če se uvedejo pred letom 2007;
5. stolpec:	potrebno usklajevanje z Madžarsko (F3), če se uvedejo pred letom 2008;
6. stolpec:	potrebno usklajevanje s Švico (SD), če se uvedejo pred letom 2008;
7. stolpec:	potrebno usklajevanje s Turčijo (F1), če se uvedejo pred letom 2008;
8. stolpec:	potrebno usklajevanje z Združenim kraljestvom (F2), če se uvedejo pred letom 2008;
9. stolpec:	potrebno usklajevanje z Grčijo (F3), če se uvedejo pred letom 2020.

2. Sporazumi med posameznimi upravami, navedeni v stolpcu z naslovom Številka sporazuma, so v Dopolnilni informaciji A tega posebnega dogovora.
3. Preskusne točke za območja razdelitve T-DAB, določene v stolpcu z naslovom Identifikator T-DAB, so tudi v Dopolnilni informaciji B tega posebnega dogovora.
4. Podatki iz 2. in 3. točke te priloge so na voljo tudi pri organu za upravljanje načrta.

Priloga 1, 1. del: Razdelitve, prenesene iz načrta, sprejete v Wiesbadnu 1995

Identifikator T-DAB	Ime	Identifik. bloka	Številka soglasja	Usklajevanje, potrebno pred uvvedbo zahtev T-DAB		Opombe
				1	2	
AUT00001	BURGENLAND	LA	3746 3493			
AUT00009	WIEN	LF	0419			
AUT01001	BURGENLAND	LC	1522 3500 3494			
AUT01002	KAERNTEN	LB	1523 3495			
AUT01003	NIEDEROESTERREICH	LH	1524 3496			
AUT01004	OBEROESTERREICH	LB	1525			
AUT01005	SALZBURG	LG	1521 3504			
AUT01006	STEIERMARK	LI	1520 3497			
AUT01007	TIROL	LI	3498 3519 1519 3505			
AUT01008	VORARLBERG	LG	1518			
AUT01009	WIEN	LB	1517			
BEL10005	OOSTENDE	LB	4919			
BEL20004	DAB-NAMUR	LH	4918			
BEL20005	DAB-LUXEMBOURG	LI	4989			
BEL20006	DAB-LIEGE	LF	4917			
BEL30001	DAB-DEUTSCHSPR GEM	LB	2817			
BEL30002	DAB-DEUTSCHSPR GEM	LG				
BUL10001	SOFIA	LF				
BUL10002	VARNA	LH	3973			
BUL10003	PLOVDIV	LE	3736 3974		*	GRC
BUL10004	STARA ZAGORA	LF	3737 3975		*	GRC
BUL10005	BLAGOEVGRAD	LA	3738		*	GRC
BUL10006	RUSE	LG				
BUL10007	MONTANA	LG				
BUL10008	PLEVEN	LH				
CVA00006	CVA - VATICAN RADIO	LI				
CZE00001	CZE PRIORITY 2	LC				
D__00020	SH-NORDWEST	LC				
D__00021	SH-WEST	LE				
D__00022	SH-MITTE	LI				

Identifikator T-DAB	Ime	Identifik. bloka	Številka soglasja	Usklajevanje, potrebno pred uvodbo zahtev T-DAB		Opombe
				1	2	
D__00023	SH-SUED	LG	3716			
D__00024	SH-OST	LA				
D__00025	NEUWERK ZU HAMBURG	LH				
D__00026	HAMBURG	LB				
D__00027	MECKLENBURG A	LE				
D__00028	MECKLENBURG B	LD				
D__00029	MECKLENBURG C	LI				
D__00030	MECKLENBURG D	LB	3547			
D__00031	NIEDERSACHSEN 1	LD				
D__00032	NIEDERSACHSEN 2 N	LA	3517			
D__00033	NIEDERSACHSEN 3	LB				
D__00034	NIEDERSACHSEN 4	LC				
D__00035	NIEDERSACHSEN 5	LE				
D__00036	NIEDERSACHSEN 6	LC				
D__00037	BREMEN	LF				
D__00038	BREMERHAVEN	LB				
D__00039	BRANDENBURG A	LE				
D__00040	BRANDENBURG B	LB				
D__00041	BRANDENBURG C	LA	3546			
D__00042	BRANDENBURG D	LC				
D__00043	BRANDENBURG E	LA				
D__00044	BERLIN	LD				
D__00045	NORDRHEIN-WESTFALEN	LH				
D__00046	NORDRHEIN-WESTFALEN	LD				
D__00047	NORDRHEIN-WESTFALEN	LB				
D__00048	NORDRHEIN-WESTFALEN	LA				
D__00049	NORDRHEIN-WESTFALEN	LD				
D__00050	NORDRHEIN-WESTFALEN	LF				
D__00051	NORDRHEIN-WESTFALEN	LC				
D__00052	NORDRHEIN-WESTFALEN	LG				
D__00053	NORDRHEIN-WESTFALEN	LA	1508			

Identifikator T-DAB	Ime	Identifik. bloka	Številka soglasja	Usklajevanje, potrebno pred uvodbo zahtev T-DAB		Opombe
				1	2	
D__00054	NORDRHEIN-WESTFALEN	LI				
D__00055	NORDRHEIN-WESTFALEN	LH				
D__00056	NORDRHEIN-WESTFALEN	LB				
D__00057	NORDRHEIN-WESTFALEN	LA				
D__00058	NORDRHEIN-WESTFALEN	LE				
D__00059	NORDRHEIN-WESTFALEN	LC	1509			
D__00060	HE 1	LH				
D__00061	HE 2	LI				
D__00062	HE 3	LD				
D__00063	HE 4	LA				
D__00064	HE 5	LG				
D__00065	HE 6	LA				
D__00066	HE 7	LC				
D__00067	SACHSEN 1	LB				
D__00068	SACHSEN 2	LE				
D__00069	SACHSEN 3	LI				
D__00070	SACHSEN 4	LF				
D__00071	SACHSEN 5	LB				
D__00072	SACHSEN-ANHALT NORD	LA				
D__00073	SACHSEN-ANHALT MITTE	LB				
D__00074	SACHSEN-ANHALT WEST	LD				
D__00075	SACHSEN-ANHALT OST	LC				
D__00076	SACHSEN-ANHALT HALLE	LG				
D__00077	SACHSEN-ANHALT SUED	LF				
D__00078	TH NORD	LB				
D__00079	TH WEST	LC				
D__00080	TH OST	LA				
D__00081	TH SUED	LG				
D__00082	BW 1	LI				
D__00083	BW 2	LD				
D__00084	BW 3	LA	1512			

Identifikator T-DAB	Ime	Identifik. bloka	Številka soglasja	Usklajevanje, potrebno pred uvodbo zahtev T-DAB		Opombe
				1	2	
D__00085	BW 4	LE				
D__00086	BW 5	LB				
D__00087	BW 6	LG				
D__00088	BW 7	LG				
D__00089	BW 8	LF				
D__00090	BW 9	LD				
D__00091	BW 10	LC				
D__00092	BW 11	LI	4493			
D__00093	BW 12	LG				
D__00094	BW 13	LA	3417 0449			
D__00095	BW 14	LG				
D__00096	RP 1	LE				
D__00097	RP 2	LH				
D__00098	RP 3	LF				
D__00099	RP 4	LB				
D__00100	SAARLAND	LG				
D__00101	BY1	LE				
D__00102	BY2	LH				
D__00103	BY3	LB				
D__00104	BY4	LE				
D__00105	BY5 1	LF				
D__00106	BY5 2	LD				
D__00107	BY6	LH				
D__00108	BY7	LC				
D__00109	BY8	LA				
D__00110	BY9	LH				
D__00111	BY10	LD				
D__00112	BY11	LB				
D__00113	BY12	LA				
D__00114	BY13	LI				
D__00115	BY14	LG				

Identifikator T-DAB	Ime	Identifik. bloka	Številka soglasja	Usklajevanje, potrebno pred uvvedbo zahtev T-DAB		Opombe
				1	2	
D__00116	BY15	LI	4523			
D__00117	BY16	LF				
D__00118	BY17	LB				
D__00119	BY18	LH				
D__00123	SH-NORDOST	LB				
D__00124	NIEDERSACHSEN 2 S	LI	4956			
D__00125	SL2/RP5/HE8-9	LD				
D__00130	NIEDERSACHSEN 7	LF				
D__00131	BERLIN II	LI				
D__00132	NORDRHEIN-WESTFALEN	LD				
D__00133	NIEDERSACHSEN 8	LI				
EST00002	EESTI POHJAREGIOON	LE		*		
EST00003	EESTI LOUNAREGIOON	LC		*		
EST00004	EESTI LAANEREGIOON	LF		*		
EST00005	EESTI IDAREGIOON	LA		*		
E__00101	ASTURIAS	LB				
E__00102	CANTABRIA	LH	2868			
E__00103	PAIS VASCO	LE	2869			
E__00104	NAVARRA	LI	2871			
E__00105	LA RIOJA	LA				
E__00106	ARAGON	LH				
E__00107	CATALUNA	LI	3444		*	I
E__00108	VALENCIA	LC				
E__00109	CASTILLA LA MANCHA	LA				
E__00110	MURCIA	LB				
E__00111	ANDALUCIA	LI	2878			
E__00112	EXTREMADURA	LD				
E__00113	MADRID	LB				
E__00114	CASTILLA LEON	LF	2879			
E__00115	GALICIA	LI				
E__00116	CEUTA	LB	3460			

Identifikator T-DAB	Ime	Identifik. bloka	Številka soglasja	Usklajevanje, potrebno pred uvredbo zahtev T-DAB		Opombe
				1	2	
E__00117	MELILLA	LA	3462			
E__00118	BALEARES	LE				
E__00119	CANARIAS	LA				
F__03101	FRANCE-101	LF				Odvisno od posebnega sporazuma med F in G
F__03102	FRANCE-102	LC	3808			Odvisno od posebnega sporazuma med F in G
F__03103	FRANCE-103	LG				Odvisno od posebnega sporazuma med F in G
F__03104	FRANCE-104	LD	3076 0381			Odvisno od posebnega sporazuma med F in G
F__03105	FRANCE-105	LF				Odvisno od posebnega sporazuma med F in G
F__03106	FRANCE-106	LA	3812			Odvisno od posebnega sporazuma med F in G
F__03107	FRANCE-107	LB	3813			Odvisno od posebnega sporazuma med F in G
F__03108	FRANCE-108	LD	3814			
F__03109	FRANCE-109	LF				
F__03110	FRANCE-110	LC	3816			
F__03111	FRANCE-111	LG				
F__03112	FRANCE-112	LA	3818			
F__03113	FRANCE-113	LC	3819 4939			
F__03114	FRANCE-114	LC	3820			
F__03115	FRANCE-115	LF				
F__03116	FRANCE-116	LC	3822 3275			
F__03117	FRANCE-117	LE	3823			
F__03118	FRANCE-118	LH				
F__03119	FRANCE-119	LA	3825			
F__03120	FRANCE-120	LG				
F__03121	FRANCE-121	LE	3827			
F__03122	FRANCE-122	LF				
F__03123	FRANCE-123	LA	3829 3419			
F__03124	FRANCE-124	LC	3820 3284			
F__03125	FRANCE-125	LB	3831			
F__03126	FRANCE-126	LC	3832			
F__03127	FRANCE-127	LI	3278			
F__03128	FRANCE-128	LA	3834			

Identifikator T-DAB	Ime	Identifik. bloka	Številka soglasja	Usklajevanje, potrebno pred uvedbo zahtev T-DAB		Opombe
				1	2	
F__03129	FRANCE-129	LI	3281			
F__03130	FRANCE-130	LC	3836			
F__03131	FRANCE-131	LB	3837			
F__03132	FRANCE-132	LA	3838			
F__03133	FRANCE-133	LC	3839			
F__03134	FRANCE-134	LB	3840			
F__03135	FRANCE-135	LA	3841			
F__03136	FRANCE-136	LC	3842			
F__03137	FRANCE-137	LB	3843			
F__03138	FRANCE-138	LA	3844			
F__03139	FRANCE-139	LF	0398			
F__03140	FRANCE-140	LA	3846			
F__03141	FRANCE-141	LC	0392 3847			
F__03142	FRANCE-142	LA				Odvisno od posebnega sporazuma med F in G
F__03143	FRANCE-143	LB				Odvisno od posebnega sporazuma med F in G
F__03144	FRANCE-144	LH				Odvisno od posebnega sporazuma med F in G
F__03145	FRANCE-145	LB				Odvisno od posebnega sporazuma med F in G
F__03146	FRANCE-146	LC				Odvisno od posebnega sporazuma med F in G
F__03147	FRANCE-147	LA				Odvisno od posebnega sporazuma med F in G
F__03148	FRANCE-148	LB	3854			Odvisno od posebnega sporazuma med F in G
F__03149	FRANCE-149	LG				Odvisno od posebnega sporazuma med F in G
F__03150	FRANCE-150	LF				Odvisno od posebnega sporazuma med F in G
F__03151	FRANCE-151	LD	3857 4423		*	I
F__03152	FRANCE-152	LB				
F__03153	FRANCE-153	LH				
F__03154	FRANCE-154	LC	3860			
F__03155	FRANCE-155	LE				
F__03156	FRANCE-156	LA	3862			
F__03157	FRANCE-157	LI				
F__03158	FRANCE-158	LF				
F__03159	FRANCE-159	LC	3865			

Identifikator T-DAB	Ime	Identifik. bloka	Številka soglasja	Usklajevanje, potrebno pred uvedbo zahtev T-DAB		Opombe
				1	2	
F__03160	FRANCE-160	LB	3866			
F__03161	FRANCE-161	LD	0390 3867			
F__03162	FRANCE-162	LI				
F__03163	FRANCE-163	LC	0387			Odvisno od posebnega sporazuma med F in G
F__03164	FRANCE-164	LE	3870			Odvisno od posebnega sporazuma med F in G
F__03165	TOULOUSE-MURET	LE				
F__03201	FRANCE-201	LE	3871			Odvisno od posebnega sporazuma med F in G
F__03202	FRANCE-202	LA	3872 4957			Odvisno od posebnega sporazuma med F in G
F__03203	FRANCE-203	LH				Odvisno od posebnega sporazuma med F in G
F__03204	FRANCE-204	LI				Odvisno od posebnega sporazuma med F in G
F__03205	FRANCE-205	LA	3875			Odvisno od posebnega sporazuma med F in G
F__03206	FRANCE-206	LF				Odvisno od posebnega sporazuma med F in G
F__03207	FRANCE-207	LE	3877			Odvisno od posebnega sporazuma med F in G
F__03208	FRANCE-208	LH				
F__03209	FRANCE-209	LI				
F__03210	FRANCE-210	LB	3880			
F__03211	FRANCE-211	LD	3881 4942			
F__03212	FRANCE-212	LI				
F__03213	FRANCE-213	LE	3883			
F__03214	FRANCE-214	LE				
F__03215	FRANCE-215	LH				
F__03216	FRANCE-216	LA	3886			
F__03217	FRANCE-217	LC	3887			
F__03218	FRANCE-218	LB	3888			
F__03219	FRANCE-219	LF				
F__03220	FRANCE-220	LB	3890			
F__03221	FRANCE-221	LA	3891			
F__03222	FRANCE-222	LH				
F__03223	FRANCE-223	LF				
F__03224	FRANCE-224	LD	3894 3285			
F__03225	FRANCE-225	LE				

Identifikator T-DAB	Ime	Identifik. bloka	Številka soglasja	Usklajevanje, potrebno pred uvedbo zahtev T-DAB		Opombe
				1	2	
F__03226	FRANCE-226	LD	3896			
F__03227	FRANCE-227	LF				
F__03228	FRANCE-228	LG				
F__03229	FRANCE-229	LF				
F__03230	FRANCE-230	LD	3900			
F__03231	FRANCE-231	LE	3901			
F__03232	FRANCE-232	LH				
F__03233	FRANCE-233	LE	3903			
F__03234	FRANCE-234	LG				
F__03235	FRANCE-235	LH				
F__03236	FRANCE-236	LD	3906			
F__03237	FRANCE-237	LH				
F__03238	FRANCE-238	LE				
F__03239	FRANCE-239	LG	0388			
F__03240	FRANCE-240	LB				
F__03241	FRANCE-241	LI				
F__03242	FRANCE-242	LI				Odvisno od posebnega sporazuma med F in G
F__03243	FRANCE-243	LF				Odvisno od posebnega sporazuma med F in G
F__03244	FRANCE-244	LC				Odvisno od posebnega sporazuma med F in G
F__03245	FRANCE-245	LG				Odvisno od posebnega sporazuma med F in G
F__03246	FRANCE-246	LI				Odvisno od posebnega sporazuma med F in G
F__03247	FRANCE-247	LD	3917			Odvisno od posebnega sporazuma med F in G
F__03248	FRANCE-248	LE	3918			Odvisno od posebnega sporazuma med F in G
F__03249	FRANCE-249	LH				Odvisno od posebnega sporazuma med F in G
F__03250	FRANCE-250	LB				Odvisno od posebnega sporazuma med F in G
F__03251	FRANCE-251	LI	4426		*	I
F__03252	FRANCE-252	LF				
F__03253	FRANCE-253	LD	3923			
F__03254	FRANCE-254	LI				
F__03255	FRANCE-255	LG				
F__03256	FRANCE-256	LH				

Identifikator T-DAB	Ime	Identifik. bloka	Številka soglasja	Usklajevanje, potrebno pred uvedbo zahtev T-DAB		Opombe
				1	2	
F__03257	FRANCE-257	LH				
F__03258	FRANCE-258	LG				
F__03259	FRANCE-259	LE				
F__03260	FRANCE-260	LI				
F__03261	FRANCE-261	LA				
F__03262	FRANCE-262	LG	0397			
F__03263	FRANCE-263	LH				Odvisno od posebnega sporazuma med F in G
F__03264	FRANCE-264	LA				Odvisno od posebnega sporazuma med F in G
F__03265	TOULOUSE-MURET	LI				
F__03357	LOIRE & RHONE	LE				
F__03358	VALLEE DU RHONE	LA				
F__03363	BRETAGNE SUD	LE				
F__03457	LOIRE & RHONE	LG				
GRC00002	THRAKI-E MACEDONIA	LG	3942 4397		*	TUR
GRC00007	KRITI	LB	3947 4402			
GRC00008	KYKLADES	LC	3948 4403			
GRC00009	DODEKANISA	LA	3949 4404		*	TUR
G__99902	UK_GIB	LE			*	E
HNG00005	HNGSOUTHEAST	LB				
HNG00007	HNGWEST	LD	3427		*	AUT
HNG00008	HNGBALATON	LE	2120			
HNG00009	HNGCENTRE	LF	2121			
HNG00010	HNGNORTHEAST	LC				
HNG00011	HNGSOUTHEAST	LD				
HNG00012	HNGSOUTHWEST	LC				
HNG00014	BUDAPEST	LA				
HOL05006	REGIO 6 DEN HAAG	LA	3734			
HRV00560	HRV2	LF	3552 3655		*	HNG I
HRV00567	HRV1	LE			*	I
HRV00568	HRV2	LB			*	I
HRV88011	HRV3	LC	0332 0314		*	I

Identifikator T-DAB	Ime	Identifik. bloka	Številka soglasja	Usklajevanje, potrebno pred uvedbo zahtev T-DAB		Opombe
				1	2	
HRV88012	HRV4	LE			*	I
HRV88013	HRV5	LD	0334 0316		*	I
HRV88014	HRV6	LE	0335		*	I
HRV88015	HRV7	LD	0336		*	I
HRV88016	HRV8	LE	0337		*	I
HRV88017	HRV9	LA				
HRV88018	HRV10	LA				
I__00317	VALLE D'AOSTA UHF	LG			*	HRV
I__00318	PIEMONTE UHF	LF			*	HRV
I__00319	LOMBARDIA UHF	LG	4574		*	HRV
I__00320	ALTO ADIGE UHF	LG	4575		*	HRV
I__00321	TRENTINO UHF	LA	4576		*	HRV
I__00322	VENETO UHF	LB	4577		*	HRV
I__00323	FRIULI V GIULIA UHF	LI	4578		*	HRV
I__00324	LIGURIA UHF	LA	4579		*	HRV
I__00325	EMILIA R UHF	LA	4467 0458		*	HRV
I__00326	MARCHE UHF	LG	4581		*	HRV
I__00327	TOSCANA UHF	LE	4582 0492		*	F HRV
I__00328	UMBRIA UHF	LC	4469 4583		*	HRV
I__00329	LAZIO UHF	LA	4470 4584		*	HRV
I__00330	ABRUZZO UHF	LF	4585		*	HRV
I__00331	MOLISE UHF	LC	4586		*	HRV
I__00332	CAMPANIA UHF	LB	4587 3247		*	HRV
I__00333	PUGLIA UHF	LH	4845 4588		*	HRV
I__00334	BASILICATA UHF	LI	4589 3249		*	HRV
I__00335	CALABRIA UHF	LC	4479 0459		*	HRV
I__00336	SICILIA UHF	LH	3251		*	HRV
I__00337	SARDEGNA UHF	LE	4921		*	F HRV
LIE00001	LIE NATIONAL 1 DAB	LE	3375 3209		*	AUT
LIE00002	LIE NATIONAL 2 DAB	LF	3376			
LTU00008	VILNIUS	LC		*		

Identifikator T-DAB	Ime	Identifik. bloka	Številka soglasja	Usklajevanje, potrebno pred uvedbo zahtev T-DAB		Opombe
				1	2	
LTU00009	ZARASAI	LF		*		
LTU00010	KAUNAS	LD		*		
LTU00011	SIAULIAI	LB		*		
LTU00012	KLAIPEDA	LF		*		
LUX00002	LUXEMBOURG2	LE	1731		*	F
LVA00002	KULDIGA	LG		*		
LVA00003	RIGA	LE		*		
LVA00004	ALUKSNE	LA		*		
LVA00005	D_PILS	LC		*		
MCO00001	MCO DAB RQR 01	LC	3935 3717		*	F I
MCO00002	MCO DAB RQR 02	LF	3718		*	I
NOR00009	OSLO AKERSHUS	LD				
POL20001	SZCZECIN	LG		*		
POL20002	GORZWLKP	LE		*		
POL20003	KOSZALIN	LH		*		
POL20004	SLUPSK	LC		*		
POL20005	PILA	LB		*		
POL20006	GDANSK	LE		*		
POL20007	BYDGOSZCZ	LF		*		
POL20008	ELBLAG	LB		*		
POL20009	TORUN	LC		*		
POL20010	PLOCK	LB		*		
POL20011	WLOCLAWEK	LE		*		
POL20012	OLSZTYN	LD		*		
POL20013	SUWALKI	LB		*		
POL20014	CIECHANOW	LF		*		
POL20015	OSTROLEKA	LG		*		
POL20016	LOMZA	LC		*		
POL20017	BIALYSTOK	LE		*		
POL20018	ZIELONA_GORA	LF		*		
POL20019	POZNAN	LC		*		

Identifikator T-DAB	Ime	Identifik. bloka	Številka soglasja	Usklajevanje, potrebno pred uvedbo zahtev T-DAB		Opombe
				1	2	
POL20020	LESZNO	LB		*		
POL20021	KONIN	LD		*		
POL20022	KALISZ	LG		*		
POL20023	SIERADZ	LF		*		
POL20024	LODZ	LC		*		
POL20025	SKIERNIEWICE	LG		*		
POL20026	PIOTRKOW_TRYB	LE		*		
POL20027	WARSZAWA	LD		*		
POL20028	RADOM	LF		*		
POL20029	SIEDLCE	LB		*		
POL20030	LUBLIN	LC		*		
POL20031	BIALA_PODL	LF		*		
POL20032	CHELM	LB		*		
POL20033	JELENIA_GORA	LD				
POL20034	LEGNICA	LG		*		
POL20035	WROCLAW	LE		*		
POL20036	WALBRZYCH	LF				
POL20037	OPOLE	LB		*		
POL20038	CZESTOCHOWA	LC		*		
POL20039	KATOWICE	LD				
POL20040	KIELCE	LB		*		
POL20041	KRAKOW	LE				
POL20042	TARNOBRZEG	LG		*		
POL20043	TARNOW	LC				
POL20044	RZESZOW	LD				
POL20045	ZAMOSC	LE		*		
POL20046	PRZEMYSL	LB				
POL20047	BIELSKO-BIALA	LF				
POL20048	NOWY_SACZ	LG				
POL20049	KROSNO	LE				
POR30201	MINHO/PORTO	LD				

Identifikator T-DAB	Ime	Identifik. bloka	Številka soglasja	Usklajevanje, potrebno pred uvvedbo zahtev T-DAB		Opombe
				1	2	
POR30202	TRÁS-OS-MONTES	LC				
POR30203	BEIRA-LITORAL	LC				
POR30204	BEIRA-ALTA/BAIXA	LI				
POR30205	ESTREMADURA	LD				
POR30206	ALTO-ALENTEJO	LA				
POR30207	BAIXO-ALENTEJO	LC				
POR30208	ALGARVE	LD				
POR30209	FUNCHAL-MACHICO	LD				
POR30210	SANTANA-VICENTE	LG				
POR30211	PORTO-SANTO	LH				
POR30212	AZR/S MIGUEL	LD				
POR30213	AZR/TERCEIRA	LE				
POR30214	AZR/FLORES	LF				
ROU00012	DAB ZONA 1	LD				
ROU00013	DAB ZONA 2	LA				
ROU00014	DAB ZONA 3	LE				
ROU00015	DAB ZONA 4	LB				
ROU00016	DAB ZONA 5	LA				
ROU00017	DAB ZONA 6	LB				
ROU00018	DAB ZONA 7	LA				
ROU00019	DAB ZONA 8	LE				
ROU00020	DAB ZONA 9	LB				
ROU00021	DAB ZONA 10	LC				
ROU00022	DAB ZONA 11	LD				
SMR00002	RADIOTVSANMARINO-4-	LF	4674			
SUI00006	GENEVE 1	LH	4119			
SUI00007	LAUSANNE 2	LA	4120			
SUI00008	MARTIGNY 3	LG				
SUI00009	SION / SIERRE 4	LE	4122			
SUI00010	BRIG GOMS 5	LH	4123			
SUI00011	YVERDON 6	LA	4124			

Identifikator T-DAB	Ime	Identifik. bloka	Številka soglasja	Usklajevanje, potrebno pred uvedbo zahtev T-DAB		Opombe
				1	2	
SUI00012	FRIBOURG/FREIBURG 7	LB	3424 4125			
SUI00013	BERNER OBERLAND 8	LA	3266 4126			
SUI00014	NEUCHATEL 9	LG				
SUI00015	BERN 10	LE	4128			
SUI00016	BIEL/BIENNE 11	LC	4129		*	F
SUI00017	JURA 12	LI	4130			
SUI00018	OLTEN 13	LC	4131		*	F
SUI00019	BASEL 14	LD	4132			
SUI00020	AARGAU 15	LI	4133			
SUI00021	LUZERN 16	LB	4134			
SUI00022	SCHAFFHAUSEN 17	LB				
SUI00023	ZUERICH 18	LF				
SUI00024	ZUG 19	LA	4927 4137			
SUI00025	SCHWYZ 20	LG				
SUI00026	URI 21	LE	4139			
SUI00027	WINTERTHUR 22	LD	4928 4140			
SUI00028	ZH OBERLAND 23	LE	4141			
SUI00029	THURGAU 24	LI	4142			
SUI00030	ST GALLEN 25	LC	4143			
SUI00031	GLARUS 26	LA	4144			
SUI00032	APPENZELL 27	LD	4145			
SUI00033	SG RHEINTAL 28	LB	4146			
SUI00034	GRAUBUENDEN 29	LI	4147			
SUI00035	ENGADIN 30	LA	4148			
SUI00036	SOPRACENERI 31	LA	4149			
SUI00037	MESOCOCCO 32	LB	4150			
SUI00038	SOTTOCENERI 33	LI	4151			
SVK00021	SVK_DAB_2 PRIORITY	LG	4903		*	AUT HNG
SVN00167	VZHOD	LG	0320			
SVN00168	ZAHOD	LA	0321 2899			
SVN00169	VZHOD	LH				

Identifikator T-DAB	Ime	Identifik. bloka	Številka soglasja	Usklajevanje, potrebno pred uvvedbo zahtev T-DAB		Opombe
				1	2	
SVN00170	ZAHOD	LF				
SVN00171	VZHOD 2	LD				
SVN00172	ZAHOD	LC				
SVN00173	VZHOD 3	LI				
SVN00174	ZAHOD 2	LE				
TUR70007	REGION-1	LA	4412 4164	*	*	GRC
TUR70008	REGION-2	LB	4413 4165		*	GRC
TUR70009	REGION-3	LB	4414 4166		*	GRC
TUR70010	REGION-4	LC				
TUR70011	REGION-5	LD		*		
TUR70012	REGION-6	LB		*		
UKR00001	UKRVL	LD		*		
UKR00002	UKRLV	LC				
UKR00003	UKRRV	LA		*		
UKR00004	UKRUG	LG				
UKR00005	UKRIF	LH				
UKR00006	UKRCH	LA				
UKR00007	UKRTE	LB				
UKR00008	UKRGM	LB		*		
UKR00009	UKRXM	LG		*		
UKR00010	UKRVN	LD		*		
UKR00011	UKROD	LG				
UKR00012	UKRKV	LA		*		
UKR00013	UKRCK	LC		*		
UKR00014	UKRCN	LB		*		
UKR00015	UKRPT	LD		*		
UKR00016	UKRSM	LC		*		
UKR00017	UKRKG	LA		*		
UKR00018	UKR NK	LB		*		
UKR00019	UKRXN	LD		*		
UKR00020	UKRXK	LA		*		

Identifikator T-DAB	Ime	Identifik. bloka	Številka soglasja	Usklajevanje, potrebno pred uvedbo zahtev T-DAB		Opombe
				1	2	
UKR00021	UKRLG	LC		*		
UKR00022	UKRDP	LC		*		
UKR00023	UKRDN	LB		*		
UKR00024	UKRZP	LE		*		
UKR00025	UKRKR	LA		*		

Priloga 1, 2. del: Razdelitve, ki izvirajo z zasedanja v Maastrichtu 2002

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

Identifikator T-DAB	IME	Identifik. bloka	Vrsta referenč- nega omrežja	Številke soglasij	Usklajevanje, potrebno pred uvedbo zahtev T-DAB									Opombe
					1	2	3	4	5	6	7	8	9	
G__00264	WOLVERHAMPTON	LK	3	0142 0175								*		
G__00265	NORTH STAFFORDSHIRE	LE	2	0148 0176 0177 0178								*		
G__00266	STOKE	LG	2									*		
G__00267	STAFFORD	LC	2	0158								*		
G__00268	TELFORD	LA	2											
G__00269	BRIDGNORTH	LE	2	0177 0178								*		
G__00270	SHREWSBURY	LM	1	0167 0179								*		
G__00271	WELSHPOOL	LD	1	0180 0220								*		
G__00272	PORT TALBOT & NEATH	LD	2									*		
G__00273	SWANSEA	LE	2	0126 0135								*		
G__00274	CARMARTHENSHIRE	LB	1									*		
G__00275	CEREDIGION	LI	1									*		
G__00276	GIBRALTAR	LC	3											
HNG30015	HNG_BARANYA	LG	1											
HNG30016	HNG_BACS_KISKUN	LJ	1			*			*					
HNG30017	HNG_BEKES	LG	1											
HNG30018	HNG_BORSOD	LD	1											
HNG30019	HNG_CSONGRAD	LP	1			*								
HNG30020	HNG_FEJER	LN	1			*			*					
HNG30021	HNG_GYOR	LO	1			*								
HNG30022	HNG_HAJDU	LA	1											
HNG30023	HNG_HEVES	LG	1											
HNG30024	HNG_KOMAROM	LH	1											
HNG30025	HNG_NOGRAD	LP	1			*								
HNG30026	HNG_PEST	LM	1	0181 0182		*			*					
HNG30027	HNG_SOMOGY	LI	1						*					
HNG30028	HNG_SZABOLCS	LN	1			*			*					
HNG30029	HNG_SZOLNOK	LK	1			*			*					
HNG30030	HNG_TOLNA	LO	1			*								
HNG30031	HNG_VAS	LJ	1						*					
HNG30032	HNG_VESZPREM	LM	1	0181 0182		*			*					
HNG30033	HNG_ZALA	LK	1						*					

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

Identifikator T-DAB	IME	Identifik. bloka	Vrsta referenč- nega omrežja	Številke soglasij	Usklajevanje, potrebno pred uvedbo zahtev T-DAB										Opombe
					1	2	3	4	5	6	7	8	9		
I_12042	RIETI_2	LM	3												
I_12051	VITERBO_1	LG	3												
I_12052	VITERBO_2	LO	3												
I_13011	AQUILA_1	LD	3												
I_13012	AQUILA_2	LI	3												
I_13021	CHIETI_1	LB	3												
I_13022	CHIETI_2	LA	3	0257 0258 0260											
I_13031	PESCARA_1	LA	3	0250 0257 0259 0260											
I_13041	TERAMO_1	LP	3	0251 0261											
I_14011	CAMPOBASSO_1	LJ	3	0210 0262 0265											
I_14021	ISERNIA_1	LD	3												
I_15011	NAPOLI_1	LI	3												
I_15012	NAPOLI_2	LJ	3	0263 0280											
I_15021	AVELLINO_1	LA	3												
I_15031	BENEVENTO_1	LG	3												
I_15041	CASERTA_1	LE	3												
I_15051	SALERNO_1	LF	3												
I_15052	SALERNO_2	LD	3	0274											
I_16011	BARI_1	LC	3												
I_16012	BARI_2	LA	3												
I_16021	BRINDISI_1	LA	3	0264 0271									*	Uprava Grčije uradno obvesti upravo Italije o vsakem prenehanju katerekoli svoje druge storitve (F3).	
I_16031	FOGGIA_1	LF	3												
I_16032	FOGGIA_2	LK	3												
I_16033	FOGGIA_3	LJ	3	0265											
I_16041	LECCE_1	LG	3										*	Uprava Grčije uradno obvesti upravo Italije o vsakem prenehanju katerekoli svoje druge storitve (F3).	
I_16042	LECCE_2	LN	3										*	Uprava Grčije uradno obvesti upravo Italije o vsakem prenehanju katerekoli svoje druge storitve (F3).	

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

Identifikator T-DAB	IME	Identifik. bloka	Vrsta referenč- nega omrežja	Številke soglasij	Usklajevanje, potrebno pred uvedbo zahtev T-DAB									Opombe
					1	2	3	4	5	6	7	8	9	
UKR30033	UKRCHN_1	LD	1		*									
UKR30034	UKRCHN_2	LA	1		*									
UKR30035	UKRCHN_3	LE	1		*									
UKR30036	UKRCHV_1	LM	1			*								
UKR30037	UKRDNE_1	LO	1			*								
UKR30038	UKRDNE_2	LG	1		*									
UKR30039	UKRDNE_3	LN	1		*	*								
UKR30040	UKRDON_1	LK	1		*	*								
UKR30041	UKRDON_2	LG	1		*									
UKR30042	UKRDON_3	LO	1		*	*								
UKR30043	UKRIVA_1	LN	1			*								
UKR30044	UKRKHA_1	LG	1		*									
UKR30045	UKRKHA_2	LD	1		*									
UKR30046	UKRKHA_3	LM	1		*	*								
UKR30047	UKRKHM_1	LK	1			*								
UKR30048	UKRKHM_2	LP	1			*								
UKR30049	UKRKHR_1	LO	1			*								
UKR30050	UKRKHR_2	LG	1		*									
UKR30051	UKRKIE_1	LE	1		*									
UKR30052	UKRKIE_2	LP	1		*	*								
UKR30053	UKRKIE_3	LG	1		*									
UKR30054	UKRKIE_4	LA	1		*									
UKR30055	UKRKIR_1	LD	1											
UKR30056	UKRKIR_2	LK	1			*								
UKR30057	UKRKRM_1	LJ	1		*	*								
UKR30058	UKRKRM_2	LH	1		*									
UKR30059	UKRKRM_3	LN	1		*	*					*			
UKR30060	UKRLUG_1	LG	1		*									
UKR30061	UKRLUG_2	LD	1		*									
UKR30062	UKRLVO_1	LP	1			*								
UKR30063	UKRLVO_2	LL	1			*								
UKR30064	UKRNIK_1	LP	1			*								

Identifikator T-DAB	IME	Identifik. bloka	Vrsta referenč- nega omrežja	Številke soglasij	Usklajevanje, potrebno pred uvedbo zahtev T-DAB									Opombe
					1	2	3	4	5	6	7	8	9	
UKR30065	UKRNIK_2	LN	1			*								
UKR30066	UKRODS_1	LE	1											
UKR30067	UKRODS_2	LK	1			*								
UKR30068	UKRODS_3	LM	1			*								
UKR30069	UKRPOL_1	LM	1		*	*								
UKR30070	UKRPOL_2	LP	1		*	*								
UKR30071	UKRPOL_3	LE	1		*									
UKR30072	UKRROV_1	LK	1			*								
UKR30073	UKRROV_2	LM	1			*								
UKR30074	UKRSUM_1	LG	1		*									
UKR30075	UKRSUM_2	LK	1		*	*								
UKR30076	UKRTER_1	LE	1											
UKR30077	UKRVIN_1	LE	1											
UKR30078	UKRVIN_2	LJ	1			*								
UKR30079	UKRVOL_1	LP	1			*								
UKR30080	UKRVOL_2	LG	1											
UKR30081	UKRZAK_1	LO	1			*								
UKR30082	UKRZAK_2	LJ	1			*			*					
UKR30083	UKRZAP_1	LK	1		*	*								
UKR30084	UKRZAP_2	LP	1		*	*								
UKR30085	UKRZHI_1	LG	1		*									
UKR30086	UKRZHI_2	LD	1											
UKR30087	UKRZHI_3	LL	1			*								

Dodatek k Prilogi 1, 2. del

Prevedbe identifikacijskih števil

Iz upravnih razlogov je organ za upravljanje načrta prevedel identifikacijske številke, ki so jih predlagale uprave in so navedene v 1. stolpcu, v nove identifikacijske številke, ki so navedene v 2. stolpcu.

Prvotna številka	Nova številka		Prvotna številka	Nova številka		Prvotna številka	Nova številka
BUL10001	BUL30001		S_00034	S_30034		UKR00030	UKR30030
BUL10002	BUL30002		S_00035	S_30035		UKR00031	UKR30031
BUL10003	BUL30003		S_00036	S_30036		UKR00032	UKR30032
BUL10004	BUL30004		S_00037	S_30037		UKR00033	UKR30033
BUL10005	BUL30005		S_00038	S_30038		UKR00034	UKR30034
BUL10006	BUL30006		S_00039	S_30039		UKR00035	UKR30035
BUL10007	BUL30007		S_00040	S_30040		UKR00036	UKR30036
BUL10008	BUL30008		S_00041	S_30041		UKR00037	UKR30037
BUL10009	BUL30009		S_00042	S_30042		UKR00038	UKR30038
BUL10010	BUL30010		S_00043	S_30043		UKR00039	UKR30039
BUL10011	BUL30011		S_00044	S_30044		UKR00040	UKR30040
BUL10012	BUL30012		S_00045	S_30045		UKR00041	UKR30041
BUL10013	BUL30013		S_00046	S_30046		UKR00042	UKR30042
BUL10014	BUL30014		S_00047	S_30047		UKR00043	UKR30043
CVA1	CVA30001		S_00048	S_30048		UKR00044	UKR30044
LUX00001	LUX30001		S_00049	S_30049		UKR00045	UKR30045
MLT00017	MLT30017		S_00050	S_30050		UKR00046	UKR30046
SMR00002	SMR30002		S_00051	S_30051		UKR00047	UKR30047
SVK0301	SVK30301		S_00052	S_30052		UKR00048	UKR30048
SVK0302	SVK30302		S_00053	S_30053		UKR00049	UKR30049
SVK0303	SVK30303		S_00054	S_30054		UKR00050	UKR30050
SVK0304	SVK30304		S_00055	S_30055		UKR00051	UKR30051
SVK0305	SVK30305		S_00056	S_30056		UKR00052	UKR30052
SVK0306	SVK30306		S_00057	S_30057		UKR00053	UKR30053
SVK0307	SVK30307		S_00058	S_30058		UKR00054	UKR30054
SVK0308	SVK30308		S_00059	S_30059		UKR00055	UKR30055
SVK0309	SVK30309		S_00060	S_30060		UKR00056	UKR30056
S_00001	S_30001		S_00061	S_30061		UKR00057	UKR30057
S_00002	S_30002		S_00062	S_30062		UKR00058	UKR30058
S_00003	S_30003		S_00063	S_30063		UKR00059	UKR30059
S_00004	S_30004		S_00064	S_30064		UKR00060	UKR30060
S_00005	S_30005		S_00065	S_30065		UKR00061	UKR30061
S_00006	S_30006		S_00066	S_30066		UKR00062	UKR30062
S_00007	S_30007		S_00067	S_30067		UKR00063	UKR30063
S_00008	S_30008		S_00068	S_30068		UKR00064	UKR30064
S_00009	S_30009		S_00069	S_30069		UKR00065	UKR30065
S_00010	S_30010		S_00070	S_30070		UKR00066	UKR30066
S_00011	S_30011		S_00071	S_30071		UKR00067	UKR30067
S_00012	S_30012		S_00072	S_30072		UKR00068	UKR30068
S_00013	S_30013		S_00073	S_30073		UKR00069	UKR30069
S_00014	S_30014		S_00074	S_30074		UKR00070	UKR30070
S_00015	S_30015		S_00075	S_30075		UKR00071	UKR30071
S_00016	S_30016		S_00076	S_30076		UKR00072	UKR30072
S_00017	S_30017		S_00077	S_30077		UKR00073	UKR30073
S_00018	S_30018		S_00078	S_30078		UKR00074	UKR30074
S_00019	S_30019		S_00079	S_30079		UKR00075	UKR30075
S_00020	S_30020		S_00080	S_30080		UKR00076	UKR30076
S_00021	S_30021		S_00081	S_30081		UKR00077	UKR30077
S_00022	S_30022		S_00082	S_30082		UKR00078	UKR30078
S_00023	S_30023		S_00083	S_30083		UKR00079	UKR30079
S_00024	S_30024		S_00084	S_30084		UKR00080	UKR30080
S_00025	S_30025		S_00085	S_30085		UKR00081	UKR30081
S_00026	S_30026		S_00086	S_30086		UKR00082	UKR30082
S_00027	S_30027		S_00087	S_30087		UKR00083	UKR30083
S_00028	S_30028		S_00088	S_30088		UKR00084	UKR30084
S_00029	S_30029		S_00089	S_30089		UKR00085	UKR30085
S_00030	S_30030		S_00090	S_30090		UKR00086	UKR30086
S_00031	S_30031		S_00091	S_30091		UKR00087	UKR30087
S_00032	S_30032		S_00092	S_30092			
S_00033	S_30033		S_00093	S_30093			

PRILOGA 2

Tehnične podlage za načrtovanje T-DAB

1 UVOD

2 OBRAVNAVA POLJSKE JAKOSTI

- 2.1 Splošno
- 2.2 Splošno napovedovanje poljske jakosti
 - 2.2.1 Zahteve za krajevne odstotke in pripadajoči popravki
 - 2.2.2 Popravek razmerja med višino in dobitkom sprejemne antene
 - 2.2.3 Najmanjša koristna poljska jakost, uporabljena za načrtovanje
- 3.3 Sevanja zunaj pasu

3 POLOŽAJ FREKVENČNIH BLOKOV

4 SOUPORABA IN ZDRUŽLJIVOST

- 4.1 Medsebojno motenje (storitev T-DAB moti storitev T-DAB)
 - 4.1.1 Največja dopustna moteča poljska jakost, soblok
 - 4.1.2 Največja dopustna moteča poljska jakost, sosednji blok
- 4.2 Medstoritveno motenje (storitev T-DAB proti drugim storitvam)
 - 4.2.1 Druge storitve motijo storitev T-DAB
 - 4.2.2 Storitve T-DAB moti druge storitve

5 REFERENČNA OMREŽJA T-DAB

- 5.1 Pomen izrazov
- 5.2 Strukture oddajniških omrežij T-DAB
- 5.3 Referenčna enofrekvenčna omrežja
 - 5.3.1 Referenčno omrežje za načrtovanje omrežij T-DAB
 - 5.3.2 Vrste referenčnih omrežij
 - 5.3.2.1 Referenčno omrežje ena – “odprto” omrežje s sedmimi oddajniki
 - 5.3.2.2 Referenčno omrežje dve – “zaprto” omrežje s sedmimi oddajniki
 - 5.3.2.3 Referenčno omrežje tri – “zaprto” omrežje s štirimi oddajniki
 - 5.3.3 Računanje ločilnih razdalj
 - 5.3.4 Nazivna lokacija oddajnika za izračun potenciala motenja, ki ga T-DAB povzroča letalski mobilni storitvi

DODATEK: KRIVULJE RAZŠIRJANJA ZA PAS 1,5 GHz

1. UVOD

Ta priloga vsebuje podatke, potrebne za izdelavo načrta CEPT T-DAB v frekvenčnem pasu 1,5 GHz.

Ustrezni sistemski parametri in omrežne zasnove T-DAB vključno z opisom enofrekvenčnih omrežij so v naslednjih dokumentih:

- Evropski standard EN 300 401 Radijski radiodifuzni sistemi; Digitalna zvokovna radiodifuzija (DAB) pri mobilnih, prenosnih in fiksnih sprejemnikih, (ETSI);
- Dokument EBU BPN-003 Rev.1 Tehnične podlage za načrtovanje omrežja storitev T-DAB in združljivost z obstoječimi radiodifuznimi storitvami (Ženeva, maj 1998);
- Priporočilo ITU-R BS.774-2 in Priporočilo ITU-R BS.1114-1.

2. OBRAVNAVA POLJSKE JAKOSTI

2.1 Splošno

Najmanjša ekvivalentna poljska jakost je navedena za frekvenco 1470 MHz za različne pogoje; ta vrednost je izvedena iz ustrezne vrednosti gostote pretoka moči v najmanjšem bloku.

V izračunih se predpostavlja, da je sprejemna antena, ki naj bi bila reprezentativna za mobilni in prenosljivi sprejem, na višini 1,5 m nad zemeljskimi tlemi, da je vsesmerna in da ima dobitek, ki je rahlo pod dobitkom dipola.

2.2 Splošno napovedovanje poljske jakosti¹

Poljska jakost, ki predpostavlja višino sprejemne antene 10 m nad zemeljskimi tlemi, se napoveduje takole:

- za kopensko območje so v dodatku k tej prilogi dane krivulje za pas 1,5 GHz;
- za pomorsko območje so v dodatku k tej prilogi dane krivulje za pas 1,5 GHz. Pri popolnoma morskih področjih se predpostavlja, da sta omrežje in območje pokrivanja na kopnem in da se morski del začne na robu območja pokrivanja;
- na mešanih območjih se poljska jakost računa v skladu s 4. oddelkom dodatka k tej prilogi.

¹ Metode napovedovanja poljske jakosti in modeli razširjanja v tej prilogi izvirajo iz prejšnjega Priporočila ITU-R P.370-7, ki je veljalo leta 1995, ko je bil sklenjen Posebni dogovor, Wiesbaden 1995. Ustrezni podatki iz prejšnjega priporočila ITU-R P.370-7 so na voljo v dodatku k tej prilogi.

2.2.1 Zahteve za krajevne odstotke in pripadajoči popravki

Zahtevani krajevni odstotek za storitve T-DAB je 99 %. Zato se ob upoštevanju ocenjene standardne deviacije 5,5 dB za krajevno spreminjanje signala T-DAB povečajo vrednosti poljske jakosti za 13 dB ($2,33 \times 5,5$ dB) (50 % lokacij), kot je navedeno v dodatku k tej prilogi, da se doseže 99 % krajevnih vrednosti, zahtevanih za načrtovanje storitve T-DAB.

2.2.2 Popravek razmerja med višino in dobitkom sprejemne antene

Uporabljene krivulje razširjanja se nanašajo na sprejemne antene, visoke 10 metrov nad zemeljskimi tlemi, kjer se storitev T-DAB načrtuje predvsem za mobilni sprejem, torej z efektivno višino sprejemne antene približno 1,5 metra. Toleranca 10 dB je potrebna za pretvorbo najmanjše zahtevane poljske jakosti za T-DAB pri višini antene 1,5 metra na vozilu na ekvivalentno vrednost pri 10 metrih.

2.2.3 Najmanjša koristna poljska jakost, uporabljena za načrtovanje

Razpredelnica 1 vsebuje vrednost za pas 1,5 GHz z vključenima popravkoma 13 dB za krajevni odstotek in 10 dB za razmerje med višino in dobitkom.

Frekvenčni pas	1,5 GHz
Najmanjša ekvivalentna poljska jakost (dB(μ V/m))	46
Korekcijski faktor krajevnega odstotka (50 % do 99 %) (dB)	+13
Popravek razmerja med višino antene in dobitkom (dB)	+10
Najmanjša srednja poljska jakost za načrtovanje (dB(μ V/m))	69

Razpredelnica 1: Določanje najmanjše srednje poljske jakosti (dB(μ V/m)) pri višini antene 10 metrov

2.3 Sevanja zunaj pasu

Signal, sevan zunaj kateregakoli 4 kHz pasu, se omejuje z masko iz slike 1.

3. POLOŽAJ FREKVENČNIH BLOKOV

Razpredelnica 2 prikazuje sprejeti usklajeni načrt določitve radiofrekvenčnih kanalov v pasu 1452–1479,5 MHz. Temelj določanja so uglaševalni inkrementi po 16 kHz in zaščitni pasovi po 176 kHz med sosednjimi frekvenčnimi bloki storitev T-DAB. Izračun teh vrednosti temelji na predpostavki, da mora oddajniška in sprejemniška oprema za T-DAB omogočati uporabo frekvenčnih blokov sosednjih T-DAB na sosednjih področjih, to je z uporabo zaščitnega pasu 176 kHz.

Številka bloka T-DAB	Srednja frekvenca (MHz)	Frekvenčno območje (MHz)
LA	1452,960	1452,192–1453,728
LB	1454,672	1453,904–1455,440
LC	1456,384	1455,616–1457,152
LD	1458,096	1457,328–1458,864
LE	1459,808	1459,040–1460,576
LF	1461,520	1460,752–1462,288
LG	1463,232	1462,464–1464,000
LH	1464,944	1464,176–1465,712
LI	1466,656	1465,888–1467,424
LJ	1468,368	1467,600–1469,136
LK	1470,080	1469,312–1470,848
LL	1471,792	1471,024–1472,560
LM	1473,504	1472,736–1474,272
LN	1475,216	1474,448–1475,984
LO	1476,928	1476,160–1477,696
LP	1478,640	1477,872–1479,408

Razpredelnica 2: Frekvenčni bloki za T-DAB

4. SOUPORABA IN ZDRUŽLJIVOST

4.1 Medsebojno motenje (storitev T-DAB moti storitev T-DAB)

4.1.1 Največja dopustna moteča poljska jakost, soblok

Zaščitno razmerje za soblok T-DAB je 10 dB.

Kot je določeno v oddelku 2.2.1, znaša standardna deviacija krajevnega spreminjanja signalov T-DAB 5,5 dB. Za vrednosti poljske jakosti za koristne in nekoristne signale se šteje, da niso soodvisne. Za zaščito koristnih signalov T-DAB na 99 % lokacij proti motenju, ki ga povzročajo drugi oddajniki T-DAB, se upoštevata popravek razširjanja $2,33 \times 5,5 \times \sqrt{2} = 18$ dB in zaščitno razmerje sobloka (T-DAB do T-DAB) v vrednosti 10 dB.

Največja dopustna ekvivalentna poljska jakost motenja, ki ga povzroča soblok na robu območja razdelitve, se lahko izračuna:

• najmanjša srednja ekvivalentna poljska jakost:	69 dB(μ V/m)
• zaščitno razmerje sobloka:	10 dB
• popravek razširjanja:	18 dB

kar pripelje do:

- največje dopustne moteče ekvivalentne poljske jakosti:
 $(69 - 10 - 18) = 41$ dB(μ V/m)

Opomba: pri referenčnem omrežju 2 in referenčnem omrežju 3 se ta vrednost poveča za 2 oziroma 4 dB.

4.1.2 Največja dopustna moteča poljska jakost, sosednji blok

Zaščitno razmerje za sosednji blok T-DAB je -30 dB.

Kot je določeno v oddelku 2.2.1, znaša standardna deviacija krajevnega spreminjanja signalov T-DAB 5,5 dB. Za vrednosti poljske jakosti za koristne in nekoristne signale se šteje, da niso soodvisne. Za zaščito koristnih signalov T-DAB na 99 % lokacij proti motenju, ki ga povzroča drugi oddajnik T-DAB, se upoštevata popravek razširjanja $2,33 \times 5,5 \times \sqrt{2} = 18$ dB in zaščitno razmerje sosednjega bloka (T-DAB do T-DAB) v vrednosti -30 dB.

Največje dopustna ekvivalentna poljska jakost motenja, ki ga povzroča sosednji blok na robu območja razdelitve se lahko izračuna:

• najmanjša srednja ekvivalentna poljska jakost:	69 dB(μ V/m)
• zaščitno razmerje sosednjega bloka:	-30 dB
• popravek razširjanja:	18 dB

kar pripelje do:

- največje dopustne moteče ekvivalentne poljske jakosti:
 $(69 - (-30) - 18) = 81$ dB(μ V/m)

Opomba: pri referenčnem omrežju 2 in referenčnem omrežju 3 se ta vrednost poveča za 2 oziroma 4 dB.

4.2 Medstoritveno motenje (storitev T-DAB proti drugim storitvam)

4.2.1 Druge storitve motijo storitev T-DAB

Največja dovoljena poljska jakost motečega signala (FS_I), da se zaščiti najmanjša koristna poljska jakost signala T-DAB (FS_{T-DAB}), se računa tako:

$$\text{Največja dovoljena } FS_I = (FS_{T-DAB} - PR - 18) \text{ dB}(\mu\text{V/m}).$$

Naslednje preglednice vsebujejo vrednosti zaščitnih razmerij, ki se uporabljajo pri izračunavanju.
Primer navajanja podatkov o storitvi:

Ruska letalska telemetrija na 1,5 GHz, ni podatkov, uporabljeni podatki XR		
Identifikator storitve	Poljska jakost, potrebna zaščite v (dB(μ V/m))	Višina oddajne antene (m)
XR	69,0	10000

kjer je

- **XR** identifikator storitve;
- **69,0** poljska jakost storitve T-DAB, ki se ščiti;
- **10000** višina oddajne antene druge storitve v metrih.

Stolpci v preglednici, ki se nanašajo na zgornji primer, imajo naslednje pomene:

Δf (MHz)	–0,9	–0,8	–0,6	–0,4	–0,2	0,0	0,2	0,4	0,6	0,8	0,9
PR (dB)	–66,0	–6,6	2,7	3,2	4,1	6,5	4,1	3,2	2,7	–6,6	–66,0

kjer je

- **–0,9** frekvenčna razlika v MHz, to je srednja frekvenca moteče druge storitve minus srednja frekvenca bloka T-DAB, ki je prizadet zaradi motenja;
- **–66,0** zahtevano zaščitno razmerje v dB.

Civilne fiksne povezave, digitalne (1,5 GHz)		
Identifikator storitve	Poljska jakost, ki se ščiti, v (dB(μ V/m))	Višina oddajne antene (m)
FA	69,0	10,0

Δf (MHz)	–2,768	–2,268	–1,768	–1,518	–1,268	–0,768	0,000	0,768	1,268	1,518	1,768
PR (dB)	–57,0	–55,0	–51,0	–46,0	–31,0	–1,0	4,0	–1,0	–30,0	–46,0	–50,0
Δf (MHz)	2,268	2,768									
PR (dB)	–56,0	–60,0									

1,5 GHz digitalni telefonski sistem točka-več točk (IRT 1500)		
Identifikator storitve	Poljska jakost, ki se ščiti, v (dB(μ V/m))	Višina oddajne antene (m)
FB	69,0	10,0

Δf (MHz)	–3,2	–3,1	–3,0	–2,9	–2,8	–2,7	–2,6	–2,5	–2,4	–2,3	–2,2
PR (dB)	–43,0	–42,2	–42,0	–41,8	–41,5	–40,5	–37,8	–35,0	–32,0	–30,0	–27,0
Δf (MHz)	–2,1	–2,0	–1,9	–1,8	–1,7	–1,6	–1,5	–1,4	–1,3	–1,2	–1,1
PR (dB)	–26,8	–26,2	–26,0	–26,0	–24,0	–20,0	–16,0	–11,5	–7,5	–5,8	–2,8
Δf (MHz)	–1,0	–0,9	–0,8	–0,7	–0,6	–0,5	–0,4	–0,3	–0,2	0,0	0,2
PR (dB)	–1,0	1,3	2,0	3,0	4,0	4,0	4,2	4,2	5,0	5,0	5,0
Δf (MHz)	0,3	0,4	0,5	0,6	0,7	0,8	0,9	1,0	1,1	1,2	1,3
PR (dB)	4,2	4,2	4,0	4,0	3,0	2,0	1,3	–1,0	–2,8	–5,8	–7,5
Δf (MHz)	1,4	1,5	1,6	1,7	1,8	1,9	2,0	2,1	2,2	2,3	2,4

PR (dB)	−11,5	−16,0	−20,0	−24,0	−26,0	−26,0	−26,2	−26,8	−27,0	−30,0	−32,0
Δ f (MHz)	2,5	2,6	2,7	2,8	2,9	3,0	3,1	3,2			
PR (dB)	−35,0	−37,8	−40,5	−41,5	−41,8	−42,0	−42,2	−43,0			

Civilne fiksne povezave, analogne (1,5 GHz). Ni podatkov, uporabljeni podatki o motenju CW											
Identifikator storitve	Poljska jakost, ki se ščiti, v (dB(μV/m))							Višina oddajne antene (m)			
F1	69,0							10,0			

Δ f (MHz)	−0,9	−0,8	−0,6	−0,4	−0,2	0,0	0,2	0,4	0,6	0,8	0,9
PR (dB)	−60,0	−6,6	2,7	3,2	4,1	6,5	4,1	3,2	2,7	−6,6	−60,0

Civilne fiksne povezave, analogne (1,5 GHz). Ni podatkov, uporabljeni podatki o motenju CW											
Identifikator storitve	Poljska jakost, ki se ščiti, v (dB(μV/m))							Višina oddajne antene (m)			
F2	58,0							10,0			

Δ f (MHz)	−0,9	−0,8	−0,6	−0,4	−0,2	0,0	0,2	0,4	0,6	0,8	0,9
PR (dB)	−60,0	−6,6	2,7	3,2	4,1	6,5	4,1	3,2	2,7	−6,6	−60,0

1,5 GHz digitalni telefonski sistem točka-več točk (IRT 1500) kot FB											
Identifikator storitve	Poljska jakost, ki se ščiti, v (dB(μV/m))							Višina oddajne antene (m)			
F3	69,0							10,0			

Δ f (MHz)	−3,2	−3,1	−3,0	−2,9	−2,8	−2,7	−2,6	−2,5	−2,4	−2,3	−2,2
PR (dB)	−43,0	−42,2	−42,0	−41,8	−41,5	−40,5	−37,8	−35,0	−32,0	−30,0	−27,0
Δ f (MHz)	−2,1	−2,0	−1,9	−1,8	−1,7	−1,6	−1,5	−1,4	−1,3	−1,2	−1,1
PR (dB)	−26,8	−26,2	−26,0	−26,0	−24,0	−20,0	−16,0	−11,5	−7,5	−5,8	−2,8
Δ f (MHz)	−1,0	−0,9	−0,8	−0,7	−0,6	−0,5	−0,4	−0,3	−0,2	0,0	0,2
PR (dB)	−1,0	1,3	2,0	3,0	4,0	4,0	4,2	4,2	5,0	5,0	5,0
Δ f (MHz)	0,3	0,4	0,5	0,6	0,7	0,8	0,9	1,0	1,1	1,2	1,3
PR (dB)	4,2	4,2	4,0	4,0	3,0	2,0	1,3	−1,0	−2,8	−5,8	−7,5
Δ f (MHz)	1,4	1,5	1,6	1,7	1,8	1,9	2,0	2,1	2,2	2,3	2,4
PR (dB)	−11,5	−16,0	−20,0	−24,0	−26,0	−26,0	−26,2	−26,8	−27,0	−30,0	−32,0
Δ f (MHz)	2,5	2,6	2,7	2,8	2,9	3,0	−3,1	3,2			
PR (dB)	−35,0	−37,8	−40,5	−41,5	−41,8	−42,0	−42,2	−43,0			

Telemetrija (1,5 GHz). Ni podatkov, uporabljeni podatki o motenju CW											
Identifikator storitve	Poljska jakost, ki se ščiti, v (dB(μV/m))							Višina oddajne antene (m)			
F4	69,0							10,0			

Δ f (MHz)	−0,9	−0,8	−0,6	−0,4	−0,2	0,0	0,2	0,4	0,6	0,8	0,9
PR (dB)	−60,0	−6,6	2,7	3,2	4,1	6,5	4,1	3,2	2,7	−6,6	−60,0

Civilne fiksne povezave, analogne (1,5 GHz), pasovna širina 500 kHz. Ni podatkov, uporabljeni podatki o motenju CW			
Identifikator storitve	Poljska jakost, ki se štiti, v (dB(μV/m))		Višina oddajne antene (m)
SD	69,0		10,0

Δ f (MHz)	−1,368	−1,268	−0,6	−0,4	−0,2	0,0	0,2	0,4	0,6	1,268	1,368
PR (dB)	−60,0	−6,6	2,7	3,2	4,1	6,5	4,1	3,2	2,7	−6,6	−60,0

Ruska letalska telemetrija na 1,5 GHz, ni podatkov, uporabljeni podatki XR			
Identifikator storitve	Poljska jakost, ki se štiti, v (dB(μV/m))		Višina oddajne antene (m)
XR	69,0		10000

Δ f (MHz)	−0,9	−0,8	−0,6	−0,4	−0,2	0,0	0,2	0,4	0,6	0,8	0,9
PR (dB)	−66,0	−6,6	2,7	3,2	4,1	6,5	4,1	3,2	2,7	−6,6	−66,0

Ukrajinska letalska telemetrija na 1,5 GHz, ni podatkov, uporabljeni podatki XU			
Identifikator storitve	Poljska jakost, ki se štiti, v (dB(μV/m))		Višina oddajne antene (m)
XU	69,0		10000

Δ f (MHz)	−0,9	−0,8	−0,6	−0,4	−0,2	0,0	0,2	0,4	0,6	0,8	0,9
PR (dB)	−66,0	−6,6	2,7	3,2	4,1	6,5	4,1	3,2	2,7	−6,6	−66,0

Videopovezava			
Identifikator storitve	Poljska jakost, ki se štiti, v (dB(μV/m))		Višina oddajne antene (m)
YB	69,0		10,0

Δ f (MHz)	−8,0	−7,5	−7,0	−6,5	−6,0	−5,5	−5,0	−4,5	−4,0	−3,5	−3,0
PR (dB)	−42,0	−23,5	−10,0	−3,0	−2,0	−3,0	−24,0	−21,0	−23,0	−31,0	−31,5
Δ f (MHz)	−2,5	−2,0	−1,5	−1,0	−0,9	−0,8	−0,7	−0,6	0,0	0,6	0,7
PR (dB)	−30,0	−28,5	−25,0	−19,5	−17,5	−11,0	−7,0	−1,5	−1,5	−4,0	−5,5
Δ f (MHz)	0,8	0,9	1,0	2,0	3,0						
PR (dB)	−13,5	−17,0	−20,0	−33,0	−47,5						

Če podatki o zaščitnih razmerjih za storitev T-DAB, ki je prizadeta zaradi motenja drugih storitev, niso sporočeni organu za upravljanje načrta, se morajo zadevne uprave sporazumno dogovoriti o merilih za souporabo. Kjer je mogoče, se uporabijo ustrezna priporočila zveze ITU-R ali odločitve odbora ERC ter odločitve in priporočila odbora ECC.

4.2.2 Storitve T-DAB moti druge storitve

Največja dovoljena poljska jakost motečega signala (FS_I), da se zaščiti najmanjša koristna poljska jakost signala druge storitve ($FS_{\text{druga storitev}}$), se računa tako:

$$\text{Največja dovoljena } FS_I = (FS_{\text{druga storitev}} - PR) \text{ dB}(\mu\text{V/m})$$

Opomba: če je primerno, se upošteva smernost sprejemne antene ali diskriminacija polarizacije.
Zahtevana ločilna razdalja se navede, če je znana.

1,5 GHz digitalni telefonski sistem točka-več točk (IRT 1500)											
Identifikator storitve	Poljska jakost, ki se ščiti, v (dB(μV/m))					Višina sprejemnika (m)			Ločilna razdalja (m)		
FB	20,0					10,0					

Δ f (MHz)	−2,200	−2,100	−2,000	−1,900	−1,800	−1,700	−1,600	−1,500	−1,400	−1,300	−1,200
PR (dB) 1%	−25,0	−22,0	−20,0	−19,0	−16,0	−12,0	−8,0	−2,0	5,0	11,0	12,0
dB (μV/m) 1%	45,0	42,0	40,0	39,0	36,0	32,0	28,0	22,0	15,0	9,0	8,0
Δ f (MHz)	0,000	1,200	1,300	1,400	1,500	1,600	1,700	1,800	1,900	2,000	2,100
PR (dB) 1%	12,0	12,0	11,0	5,0	−2,0	−8,0	−12,0	−16,0	−19,0	−20,0	−22,0
dB (μV/m) 1%	8,0	8,0	9,0	15,0	22,0	28,0	32,0	36,0	39,0	40,0	42,0
Δ f (MHz)	2,200										
PR (dB) 1%	−25,0										
dB (μV/m) 1%	45,0										

Civilne fiksne povezave, analogne (1,5 GHz)											
Identifikator storitve	Poljska jakost, ki se ščiti, v (dB(μV/m))					Višina sprejemnika (m)			Ločilna razdalja (m)		
F1	31,0					10,0					

Δ f (MHz)	−4,768	−3,768	−2,768	−2,268	−1,768	−1,518	−1,268	−0,768	0,000	0,768	1,268
PR (dB) 1%	−43,0	−26,0	−17,0	−16,0	−11,0	−8,0	−5,0	4,0	12,0	7,0	6,0
dB (μV/m) 1%	74,0	57,0	48,0	47,0	42,0	39,0	36,0	27,0	19,0	24,0	25,0
Δ f (MHz)	1,518	1,768	2,268	2,768	3,768	4,768					
PR (dB) 1%	3,0	1,0	−5,0	−15,0	−25,0	−41,0					
dB (μV/m) 1%	28,0	30,0	36,0	46,0	56,0	72,0					

Civilne fiksne povezave, analogne (1,5 GHz)											
Identifikator storitve	Poljska jakost, ki se ščiti, v (dB(μV/m))					Višina sprejemnika (m)			Ločilna razdalja (m)		
F2	31,0					10,0					

Δ f (MHz)	−4,76	−3,768	−2,768	−2,268	−1,768	−1,518	−1,268	−0,768	0,000	0,768	1,268
PR (dB) 1%	−43,0	−26,0	−17,0	−16,0	−11,0	−8,0	−5,0	4,0	12,0	7,0	6,0
dB (μV/m) 1%	74,0	57,0	48,0	47,0	42,0	39,0	36,0	27,0	19,0	24,0	25,0
Δ f (MHz)	1,518	1,768	2,268	2,768	3,768	4,768					
PR (dB) 1%	3,0	1,0	−5,0	−15,0	−25,0	−41,0					
dB (μV/m) 1%	28,0	30,0	36,0	46,0	56,0	72,0					

1,5 GHz digitalni telefonski sistem točka–več točk (IRT 1500)			
Identifikator storitve	Poljska jakost, ki se ščiti, v (dB(μV/m))	Višina sprejemnika (m)	Ločilna razdalja (m)
F3	20,0	10,0	

Δ f (MHz)	–2,200	–2,100	–2,000	–1,900	–1,800	–1,700	–1,600	–1,500	–1,400	–1,300	–1,200
PR (dB) 1%	–25,0	–22,0	–20,0	–19,0	–16,0	–12,0	–8,0	–2,0	5,0	11,0	12,0
dB (μV/m) 1%	45,0	42,0	40,0	39,0	36,0	32,0	28,0	22,0	15,0	9,0	8,0
Δ f (MHz)	0,000	1,200	1,300	1,400	1,500	1,600	1,700	1,800	1,900	2,000	2,100
PR (dB) 1%	12,0	12,0	11,0	5,0	–2,0	–8,0	–12,0	–16,0	–19,0	–20,0	–22,0
dB (μV/m) 1%	8,0	8,0	9,0	15,0	22,0	28,0	32,0	36,0	39,0	40,0	42,0
Δ f (MHz)	2,200										
PR (dB) 1%	–25,0										
dB (μV/m) 1%	45,0										

Telemetrija (1,5 GHz). Ni podatkov (–60 dB)			
Identifikator storitve	Poljska jakost, ki se ščiti, v (dB(μV/m))	Višina sprejemnika (m)	Ločilna razdalja (m)
F4	0,0	10,0	

Δ f (MHz)	–0,100	0,000	0,100								
PR (dB) 1%	–60,0	–60,0	–60,0								
dB (μV/m) 1%	60,0	60,0	60,0								

Civilne fiksne povezave, analogne (1,5 GHz), pasovna širina 500 kHz			
Identifikator storitve	Poljska jakost, ki se ščiti, v (dB(μV/m))	Višina sprejemnika (m)	Ločilna razdalja (m)
SD	27,0	10,0	

Δ f (MHz)	–1,36	–1,268	–0,768	0,000	0,768	1,268	1,368				
PR (dB) 1%	–45,0	4,0	4,0	12,0	4,0	4,0	–45,0				
dB (μV/m) 1%	72,0	23,0	23,0	15,0	23,0	23,0	72,0				

Ruska letalska mobilna (telemetrija) storitev na 1,5 GHz			
Identifikator storitve	Poljska jakost, ki se ščiti, v (dB(μV/m))	Višina sprejemnika (m)	Ločilna razdalja (m)
XR	15,0	10,0	1000,0

Δ f (MHz)	–8,00	–7,000	–6,000	–5,000	–4,000	–3,000	–2,000	0,000	2,000	3,000	4,000
PR (dB) 1%	–30,0	–20,0	–10,0	–2,0	5,0	10,0	15,0	15,0	15,0	10,0	5,0
dB (μV/m) 1%	60,0	50,0	40,0	32,0	25,0	20,0	15,0	15,0	15,0	20,0	25,0
Δ f (MHz)	5,000	6,000	7,000	8,000							
PR (dB) 1%	–2,0	–10,0	–20,0	–30,0							
dB (μV/m) 1%	32,0	40,0	505,0	60,0							

Ukrajinska letalska mobilna (telemetrija) storitev na 1,5 GHz			
Identifikator storitve	Poljska jakost, ki se šteti, v (dB(μ V/m))	Višina sprejemnika (m)	Ločilna razdalja (m)
XU	15,0	10,0	1000,0

Δf (MHz)	−8,00	−7,000	−6,000	−5,000	−4,000	−3,000	−2,000	0,000	2,000	3,000	4,000
PR (dB) 1%	−30,0	−20,0	−10,0	−2,0	5,0	10,0	15,0	15,0	15,0	10,0	5,0
dB (μ V/m) 1%	45,0	35,0	25,0	17,0	10,0	5,0	0,0	0,0	0,0	5,0	10,0
Δf (MHz)	5,000	6,000	7,000	8,000							
PR (dB) 1%	−2,0	−10,0	−20,0	−30,0							
dB (μ V/m) 1%	17,0	25,0	35,0	45,0							

Videopovezave (F)			
Identifikator storitve	Poljska jakost, ki se šteti, v (dB(μ V/m))	Višina sprejemnika (m)	Ločilna razdalja (m)
YB	29,0	500,0	

Δf (MHz)	−13,000	−12,000	0,000	12,000	13,000						
PR (dB) 1%	−46,0	20,0	20,0	20,0	−46,0						
dB (μ V/m) 1%	75,0	9,0	9,0	9,0	75,0						

Satelitska zvokovna radiodifuzija - digitalna (1,5 GHz)			
Identifikator storitve	Poljska jakost, ki se šteti, v (dB(μ V/m))	Višina sprejemnika (m)	Ločilna razdalja (m)
ZA	29,0	10	

Δf (MHz)	−3,324	−1,712	−0,856	0,000	0,856	1,712	3,324				
PR (dB) 1%	−55,8	−13,1	13,0	13,0	13,0	−13,1	−55,8				
dB (μ V/m) 1%	84,8	42,1	16,0	16,0	16,0	42,1	84,8				

Če podatki o zaščitnih razmerjih za druge storitve, ki jih prizadeva motenje storitve T-DAB, niso sporočeni organu za upravljanje načrta, se morajo zadevne uprave sporazumno dogovoriti o merilih za souporabo. Kadar je mogoče, se uporabijo ustrezna priporočila zveze ITU-R ali odločitve odbora ERC ter odločitve in priporočila odbora ECC.

5. REFERENČNA OMREŽJA T-DAB

Načela, ki jih je sprejela konferenca CEPT za sisteme T-DAB, dovoljujejo razumne kompromise med gostoto oddajnikov, ki so potrebni za doseganje koristnega pokrivanja, in zmožnostjo za ponovno uporabo istega frekvenčnega bloka z drugimi programskimi vsebinami na drugih območjih.

5.1 Pomen izrazov

Referenčna točka je točka na meji referenčnega omrežja, v kateri se računa odhodno motenje, glej tudi slike 3, 4 in 5. Dohodno motenje se izračunava v isti točki.

V nadaljnjem besedilu sta opredeljeni dve razdalji; glej tudi sliko 2.

i) **Ločilna razdalja** je razdalja med mejama (ali zunanjim robom) dveh območij pokrivanja s storitvama T-DAB ali dvema različnima storitvama. Navadno sta pri tem dve ločilni razdalji, po ena za vsako storitev, ker morata biti zaščiteni različni poljski jakosti ali ker imata storitvi različni zaščitni razmerji. V takem primeru se uporabi večja razdalja.

ii) **Medoddajniška razdalja** je razdalja med sosednjima lokacijama namestitve oddajnika v enofrekvenčnem omrežju (SFN).

Omrežja na sliki 2 so zaradi prikladnosti prikazana v obliki navadne šesterokotne strukture.

5.2 Strukture oddajniških omrežij T-DAB

Omrežja T-DAB so zgrajena po enem od dveh osnovnih modelov ali z njuno kombinacijo:

- i) enofrekvenčno omrežje (SFN), ki uporablja neusmerjene oddajne antene, imenovano tudi "odprto omrežje"; glej še sliko 2. Sistem z enim samim oddajnikom se lahko šteje kot poseben primer odprte konfiguracije;
- ii) enofrekvenčno omrežje (SFN), ki uporablja usmerjene oddajne antene vzdolž zunanjega roba območja pokrivanja, imenovano tudi "zaprto omrežje"; glej še sliko 2.

5.3 Referenčna enofrekvenčna omrežja

5.3.1 Referenčno omrežje za načrtovanje omrežij T-DAB

Referenčno omrežje je orodje za pridobivanje primernih vrednosti ločilnih razdalj in za ocenjevanje, koliko motenja lahko povzroči tipično enofrekvenčno omrežje (SFN) na določeni razdalji.

Za izračunavanje motečih poljskih jakosti se uporablja metoda vsote moči, opisana v oddelku 2.1 Priloge 4. Za izračun posameznih poljskih jakosti se uporablja metoda iz oddelka 2.2 te priloge.

5.3.2 Vrste referenčnih omrežij

5.3.2.1 Referenčno omrežje ena – Odprto omrežje s sedmimi oddajniki (uporabljeno tudi za Wiesbaden 1995); glej sliko 3

Število oddajnikov:	7
Geometrija omrežja oddajnikov:	šesterokotna
Efektivna višina oddajne antene:	
Periferni oddajniki:	150 m
Osrednji oddajnik:	150 m
Razdalja med sosednjimi oddajniki:	15 km
Sevana moč:	
Periferni oddajniki:	1 kW
Osrednji oddajnik:	0,5 kW

Smernost oddajne antene:	
Periferni oddajniki:	neusmerjena
Osrednji oddajnik:	neusmerjena
Širina približno šesterokotnega območja pokrivanja:	60 km

Uporaba tega omrežja je primerna, če je njegova zahtevana širina večja od 60 km.

5.3.2.2 Referenčno omrežje dve – Zaprto omrežje s sedmimi oddajniki, glej sliko 4

Število oddajnikov:	7
Geometrija omrežja oddajnikov:	šesterokotna
Efektivna višina oddajne antene:	
Periferni oddajniki:	50 m
Osrednji oddajnik:	150 m
Razdalja med sosednjimi oddajniki:	26 km
Sevana moč:	
Periferni oddajniki:	5 kW
Osrednji oddajnik:	1,25 kW
Smernost oddajne antene:	
Periferni oddajniki:	–12 dB prek sektorja širine 240 stopinj
Osrednji oddajnik:	neusmerjena
Širina približno šesterokotnega območja pokrivanja:	45km

Uporaba tega omrežja je primerna, če je njegova zahtevana širina med 30 km in 60 km.

5.3.2.3 Referenčno omrežje tri – Zaprto omrežje s štirimi oddajniki, glej sliko 5

Število oddajnikov:	4
Geometrija omrežja oddajnikov:	kvadratna
Efektivna višina oddajne antene:	
Periferni oddajniki:	50 m
Razdalja med sosednjimi oddajniki:	16 km
Sevana moč:	
Periferni oddajniki:	1 kW
Smernost oddajne antene:	–12 dB v sektorju 225 stopinj
Širina približno osmerokotnega območja pokrivanja:	23 km

Uporaba tega omrežja je primerna, če je njegova zahtevana širina do 30 km.

Opozoriti je treba, da bo morda v vseh primerih potrebna prilagoditev karakteristik oddajnikov, ko se bo opravila prevedba od razdelitev na dodelitve, in da morajo imeti strukture alternativnega omrežja podobno območje pokrivanja in potencial motenja kot zgoraj navedena referenčna omrežja.

5.3.3 Računanje ločilnih razdalj

Največja moteča poljska jakost iz katerekoli storitve na robu referenčnega omrežja je enaka:

$$E_I^{Max} = E_W^{Min} - PR - PC$$

kjer je

E_I^{Max} = največja moteča poljska jakost na robu referenčnega omrežja

E_W^{Min} = najmanjša srednja koristna poljska jakost za načrtovanje (69 dB(μV/m))

PR = zaščitno razmerje, odvisno od obravnavane storitve

PC = popravek razširjanja 18 dB.

Moteče poljske jakosti za območja kopnega, hladnega morja in toplega morja, ki jih povzročijo ta referenčna omrežja, so prikazane na slikah 6a, 6b, 7a, 7b, 8a in 8b. Pripadajoče številске vrednosti so v razpredelnicah 5a, 5b, 6a, 6b, 7a oziroma 7b. Ločilne razdalje, ki temeljijo na razširjanju za 1 % časa, so navedene v spodnji razpredelnici 4.


		Referenčno omrežje 1 motenje pri sprejemu	Referenčno omrežje 2 motenje pri sprejemu	Referenčno omrežje 3 motenje pri sprejemu
Največja dopustna moteča poljska jakost sobloka (dB(μV/m))		41 dB(μV/m)	43 dB(μV/m)	45 dB(μV/m)
Referenčno omrežje 1, ki moti	Kopno	50 km	44 km	38 km
	Hladno morje	314 km	290 km	269 km
	Toplo morje	434 km	392 km	350 km
Referenčno omrežje 2, ki moti	Kopno	39 km	34 km	30 km
	Hladno morje	341 km	318 km	297 km
	Toplo morje	466 km	426 km	386 km
Referenčno omrežje 3, ki moti	Kopno	23 km	20 km	17 km
	Hladno morje	292 km	272 km	255 km
	Toplo morje	388 km	348 km	313 km

Razpredelnica 4: Ločilne razdalje referenčnega omrežja.


5.3.4 Nazivna lokacija oddajnika za izračun potenciala motenja, ki ga T-DAB povzroča letalski mobilni storitvi

Sredina referenčnega omrežja se uporabi kot nazivna lokacija pri izračunavanju, koliko omrežje moti letalsko sprejemno preskušalno točko. Za ta primer se pri izračunu uporabi moč 38,1 dBW.

Razmerje med
zunajpasovno močjo
pasovne širine
4 kHz in celotno močjo
sistema T-DAB
v bloku 1,5 MHz

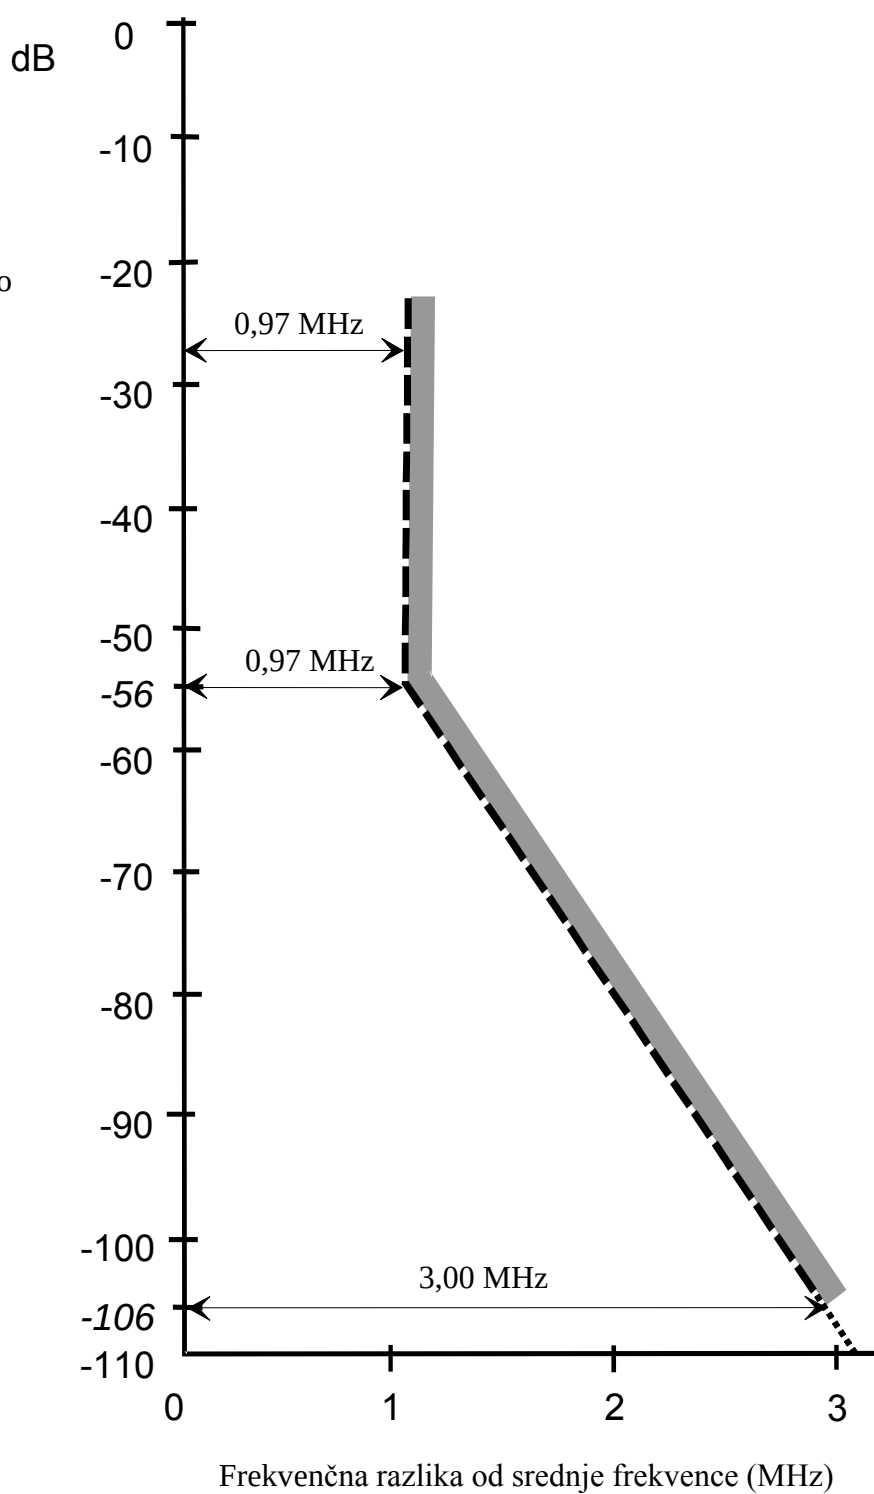


Slika 1: Spektralna maska za zunajpasovna oddajanja T-DAB

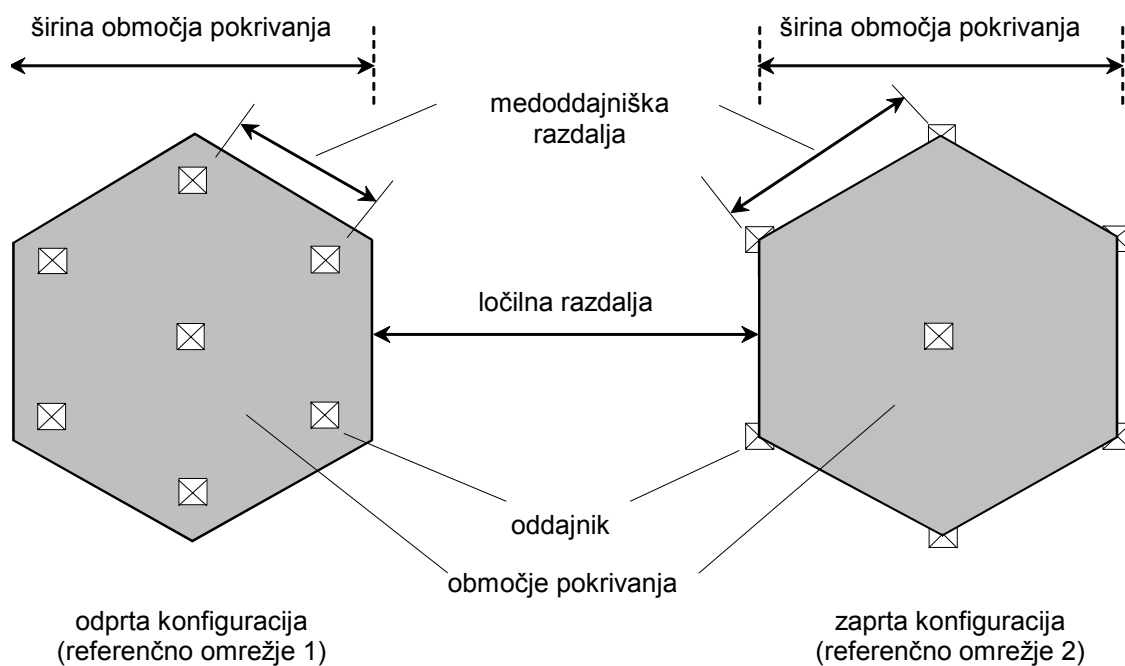


Slika 2: Primer struktur omrežij T-DAB in razdalj – primer sobloka


Opomba: Za ta primer sta bili uporabljeni dve različni omrežji s sedmimi oddajniki. Mogoče so tudi drugačne konfiguracije omrežij.

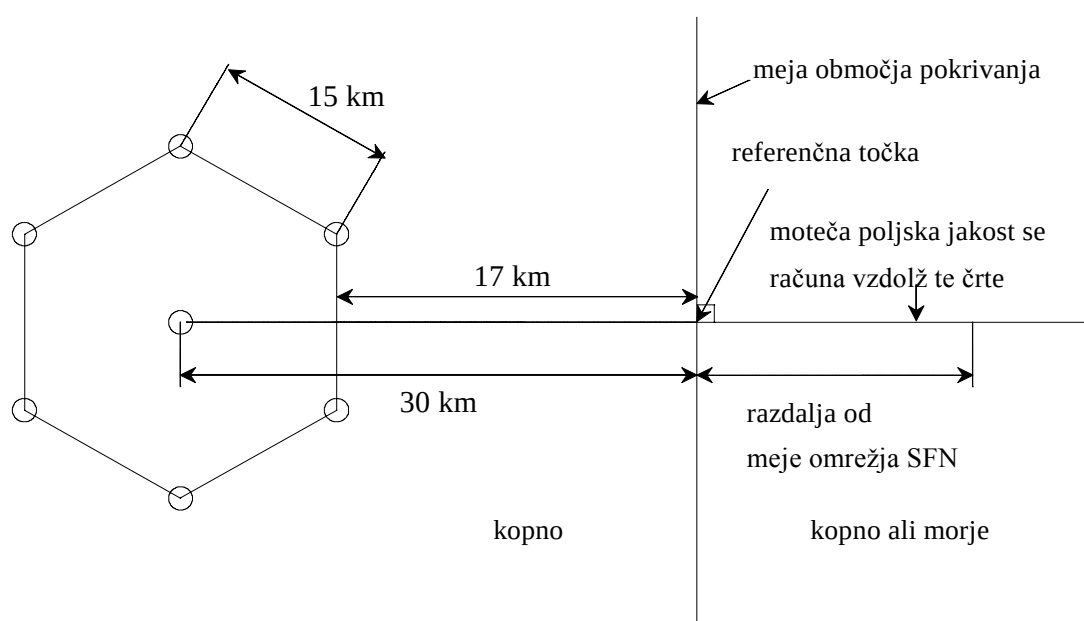

Slika 3: Diagram razporeda referenčnega omrežja ena

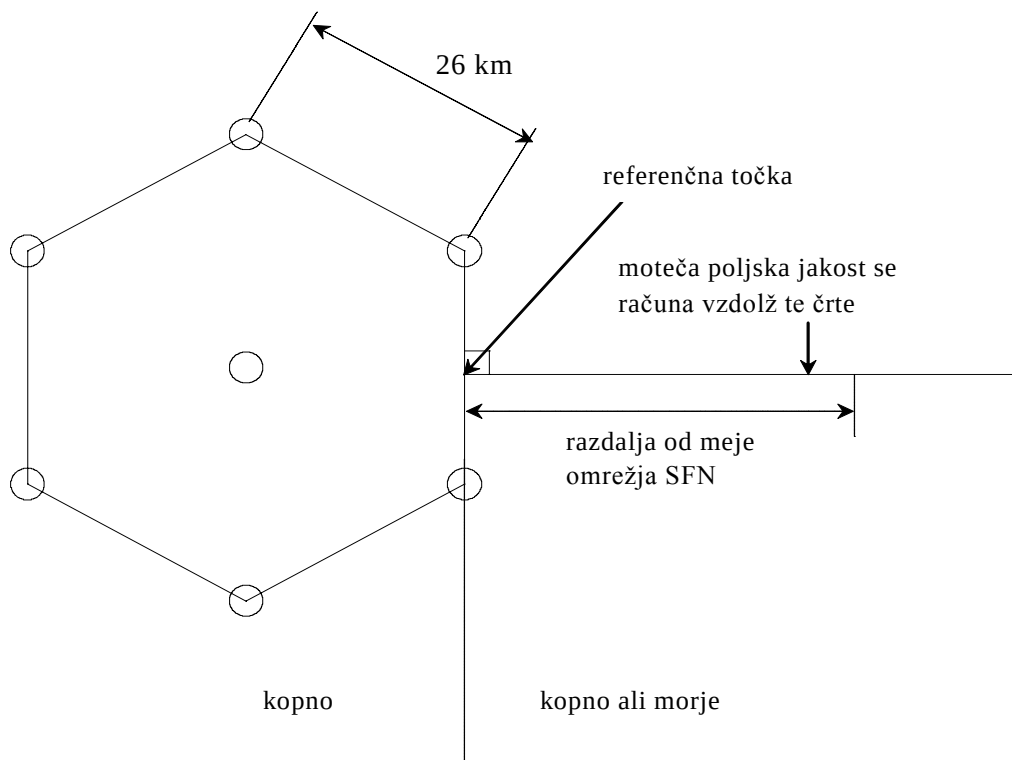


Slika 4: Diagram razporeda referenčnega omrežja dve

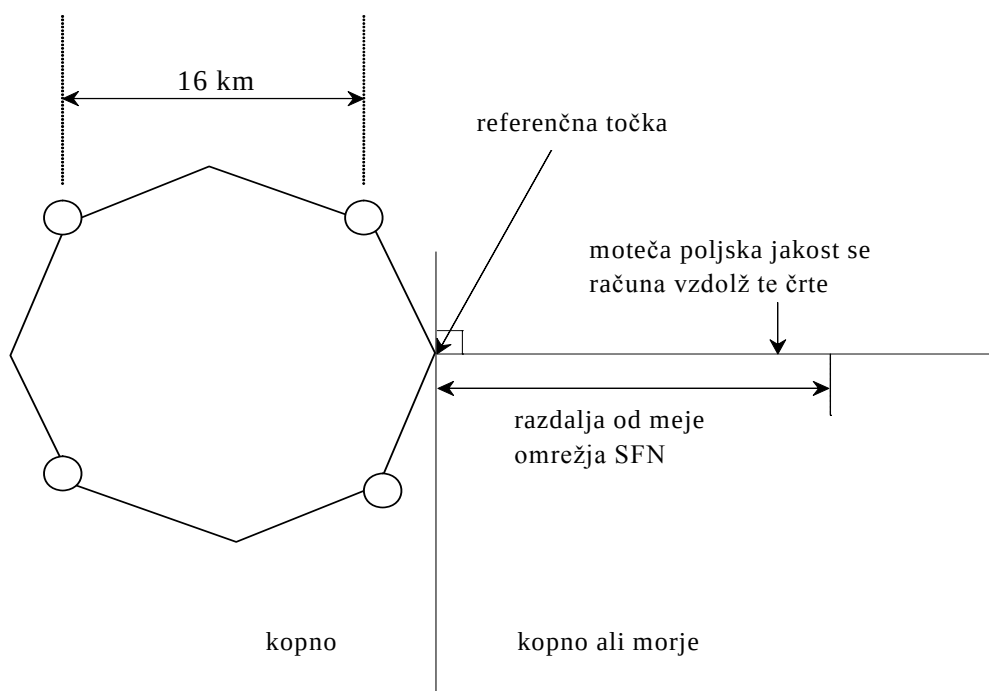

Slika 5: Diagram razporeda referenčnega omrežja tri

Potencial motenja referenčnega omrežja 1 za 50 % časa

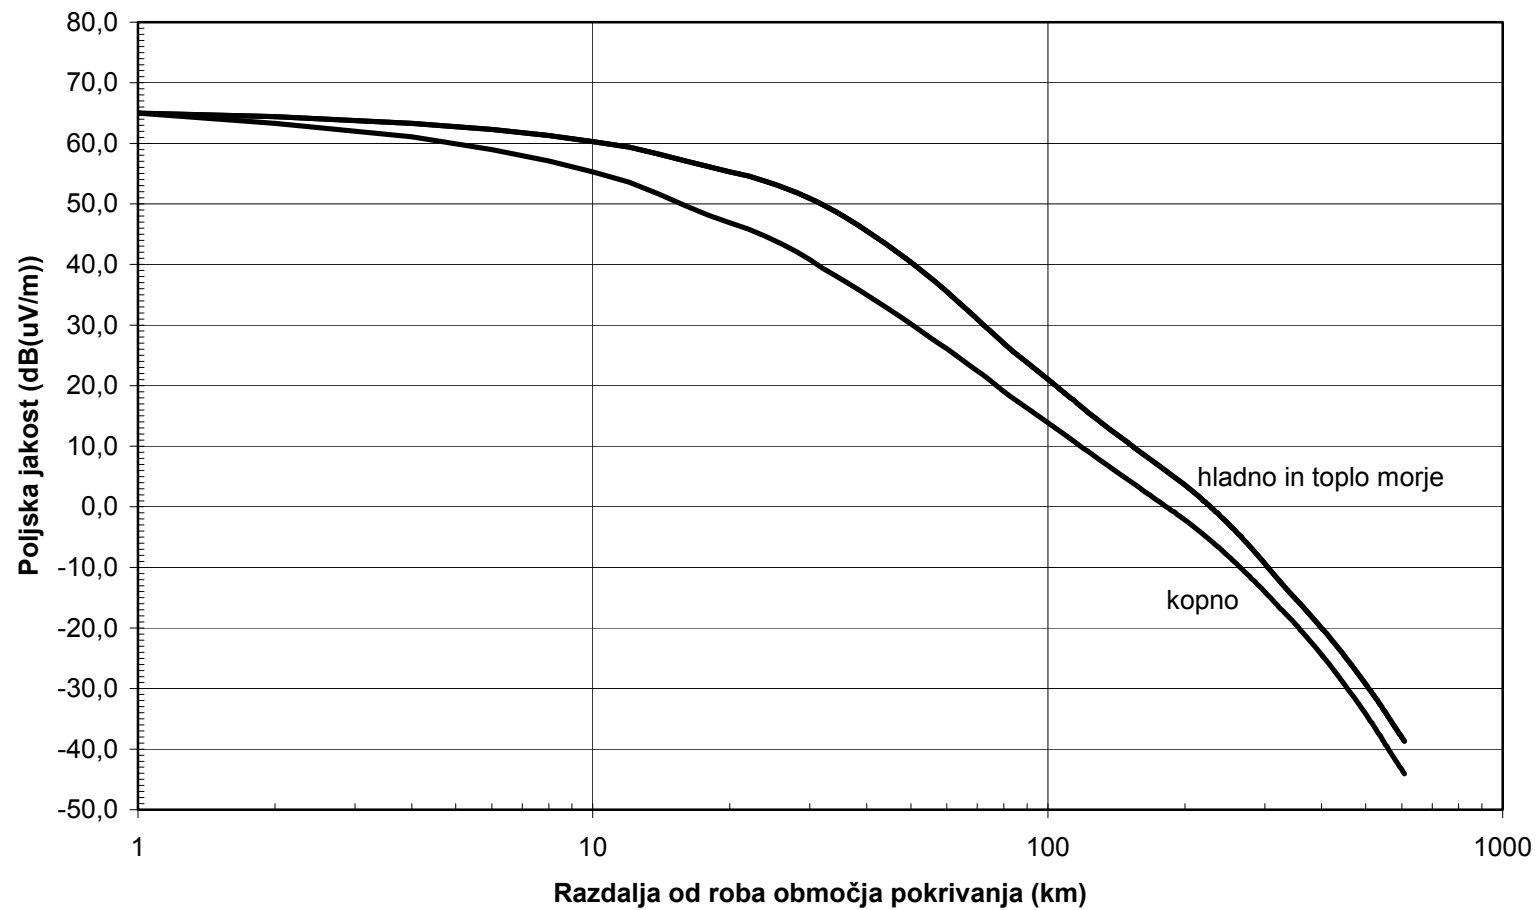

Slika 6a: Potencial motenja referenčnega omrežja ena za 50 % časa


Razpredelnica 5a: Razpredelnične vrednosti za potencial motenja referenčnega omrežja 1 za 50 % časa – (1)

Razdalja (km)	Kopno	Hladno morje	Toplo morje	Razdalja (km)	Kopno	Hladno morje	Toplo morje	Razdalja (km)	Kopno	Hladno morje	Toplo morje	Razdalja (km)	Kopno	Hladno morje	Toplo morje	Razdalja (km)	Kopno	Hladno morje	Toplo morje
0	65,5	65,5	65,5	60	26,1	35,5	35,5	120	9,6	16,2	16,2	180	0,3	6,2	6,2	240	-7,0	-1,6	-1,6
2	63,3	64,4	64,4	62	25,3	34,5	34,5	122	9,3	15,7	15,7	182	0,0	5,9	5,9	242	-7,2	-1,8	-1,8
4	61,1	63,3	63,3	64	24,6	33,6	33,6	124	8,9	15,3	15,3	184	-0,2	5,6	5,6	244	-7,5	-2,1	-2,1
6	59,0	62,3	62,3	66	23,8	32,7	32,7	126	8,5	14,9	14,9	186	-0,5	5,4	5,4	246	-7,7	-2,3	-2,3
8	57,1	61,3	61,3	68	23,1	31,8	31,8	128	8,1	14,5	14,5	188	-0,7	5,1	5,1	248	-8,0	-2,6	-2,6
10	55,3	60,3	60,3	70	22,4	31,0	31,0	130	7,8	14,1	14,1	190	-0,9	4,9	4,9	250	-8,2	-2,9	-2,9
12	53,6	59,4	59,4	72	21,8	30,1	30,1	132	7,4	13,7	13,7	192	-1,2	4,6	4,6	252	-8,4	-3,1	-3,1
14	51,6	58,2	58,2	74	21,1	29,3	29,3	134	7,1	13,3	13,3	194	-1,4	4,4	4,4	254	-8,7	-3,4	-3,4
16	49,7	57,1	57,1	76	20,4	28,5	28,5	136	6,7	13,0	13,0	196	-1,7	4,1	4,1	256	-8,9	-3,6	-3,6
18	48,1	56,1	56,1	78	19,7	27,8	27,8	138	6,4	12,6	12,6	198	-1,9	3,9	3,9	258	-9,2	-3,9	-3,9
20	46,9	55,3	55,3	80	19,1	27,0	27,0	140	6,1	12,3	12,3	200	-2,2	3,6	3,6	260	-9,4	-4,2	-4,2
22	45,8	54,6	54,6	82	18,4	26,2	26,2	142	5,7	11,9	11,9	202	-2,4	3,3	3,3	262	-9,6	-4,4	-4,4
24	44,6	53,7	53,7	84	17,9	25,6	25,6	144	5,4	11,6	11,6	204	-2,6	3,1	3,1	264	-9,9	-4,7	-4,7
26	43,4	52,8	52,8	86	17,3	25,0	25,0	146	5,1	11,2	11,2	206	-2,9	2,8	2,8	266	-10,1	-4,9	-4,9
28	42,1	51,9	51,9	88	16,8	24,4	24,4	148	4,8	10,9	10,9	208	-3,1	2,6	2,6	268	-10,4	-5,2	-5,2
30	40,8	50,9	50,9	90	16,3	23,8	23,8	150	4,5	10,6	10,6	210	-3,4	2,3	2,3	270	-10,6	-5,5	-5,5
32	39,4	49,9	49,9	92	15,8	23,3	23,3	152	4,2	10,3	10,3	212	-3,6	2,1	2,1	272	-10,8	-5,7	-5,7
34	38,2	48,8	48,8	94	15,3	22,7	22,7	154	3,9	9,9	9,9	214	-3,8	1,8	1,8	274	-11,1	-6,0	-6,0
36	37,1	47,7	47,7	96	14,8	22,1	22,1	156	3,6	9,6	9,6	216	-4,1	1,6	1,6	276	-11,3	-6,2	-6,2
38	36,0	46,6	46,6	98	14,4	21,6	21,6	158	3,3	9,3	9,3	218	-4,3	1,3	1,3	278	-11,5	-6,5	-6,5
40	35,0	45,5	45,5	100	13,9	21,1	21,1	160	3,0	9,0	9,0	220	-4,6	1,0	1,0	280	-11,8	-6,8	-6,8
42	34,0	44,5	44,5	102	13,4	20,5	20,5	162	2,7	8,7	8,7	222	-4,8	0,8	0,8	282	-12,0	-7,0	-7,0
44	33,0	43,4	43,4	104	13,0	20,0	20,0	164	2,4	8,4	8,4	224	-5,1	0,5	0,5	284	-12,2	-7,3	-7,3
46	32,0	42,4	42,4	106	12,5	19,5	19,5	166	2,1	8,1	8,1	226	-5,3	0,3	0,3	286	-12,4	-7,5	-7,5
48	31,1	41,4	41,4	108	12,1	19,0	19,0	168	1,9	7,8	7,8	228	-5,5	0,0	0,0	288	-12,7	-7,8	-7,8
50	30,2	40,4	40,4	110	11,7	18,5	18,5	170	1,6	7,5	7,5	230	-5,8	-0,3	-0,3	290	-12,9	-8,1	-8,1
52	29,3	39,4	39,4	112	11,3	18,0	18,0	172	1,3	7,3	7,3	232	-6,0	-0,5	-0,5	292	-13,1	-8,3	-8,3
54	28,4	38,4	38,4	114	10,8	17,6	17,6	174	1,1	7,0	7,0	234	-6,3	-0,8	-0,8	294	-13,3	-8,6	-8,6
56	27,6	37,4	37,4	116	10,4	17,1	17,1	176	0,8	6,7	6,7	236	-6,5	-1,0	-1,0	296	-13,6	-8,8	-8,8
58	26,8	36,4	36,4	118	10,0	16,6	16,6	178	0,5	6,4	6,4	238	-6,7	-1,3	-1,3	298	-13,8	-9,1	-9,1

Razpredelnica 5a: Razpredelnične vrednosti za potencial motenja referenčnega omrežja 1 za 50 % časa – (2)

Razdalja (km)	Kopno	Hladno morje	Toplo morje	Razdalja (km)	Kopno	Hladno morje	Toplo morje	Razdalja (km)	Kopno	Hladno morje	Toplo morje	Razdalja (km)	Kopno	Hladno morje	Toplo morje	Razdalja (km)	Kopno	Hladno morje	Toplo morje
300	-14,0	-9,4	-9,4	360	-20,4	-16,1	-16,1	420	-26,4	-21,9	-21,9	480	-32,3	-27,5	-27,5	540	-38,0	-32,8	-32,8
302	-14,3	-9,6	-9,6	362	-20,6	-16,3	-16,3	422	-26,6	-22,1	-22,1	482	-32,5	-27,6	-27,6	542	-38,2	-33,0	-33,0
304	-14,5	-9,9	-9,9	364	-20,8	-16,5	-16,5	424	-26,8	-22,2	-22,2	484	-32,7	-27,8	-27,8	544	-38,4	-33,2	-33,2
306	-14,7	-10,1	-10,1	366	-21,0	-16,7	-16,7	426	-27,0	-22,4	-22,4	486	-32,9	-28,0	-28,0	546	-38,6	-33,4	-33,4
308	-14,9	-10,4	-10,4	368	-21,2	-16,9	-16,9	428	-27,2	-22,6	-22,6	488	-33,1	-28,2	-28,2	548	-38,8	-33,6	-33,6
310	-15,1	-10,6	-10,6	370	-21,4	-17,1	-17,1	430	-27,4	-22,8	-22,8	490	-33,3	-28,4	-28,4	550	-39,0	-33,7	-33,7
312	-15,4	-10,9	-10,9	372	-21,6	-17,3	-17,3	432	-27,6	-23,0	-23,0	492	-33,5	-28,5	-28,5	552	-39,2	-33,9	-33,9
314	-15,6	-11,1	-11,1	374	-21,8	-17,5	-17,5	434	-27,8	-23,2	-23,2	494	-33,7	-28,7	-28,7	554	-39,4	-34,1	-34,1
316	-15,8	-11,4	-11,4	376	-22,0	-17,7	-17,7	436	-28,0	-23,4	-23,4	496	-33,8	-28,9	-28,9	556	-39,5	-34,3	-34,3
318	-16,0	-11,6	-11,6	378	-22,2	-17,9	-17,9	438	-28,2	-23,6	-23,6	498	-34,0	-29,1	-29,1	558	-39,7	-34,5	-34,5
320	-16,3	-11,9	-11,9	380	-22,4	-18,1	-18,1	440	-28,4	-23,7	-23,7	500	-34,2	-29,3	-29,3	560	-39,9	-34,6	-34,6
322	-16,5	-12,1	-12,1	382	-22,6	-18,3	-18,3	442	-28,6	-23,9	-23,9	502	-34,4	-29,4	-29,4	562	-40,1	-34,8	-34,8
324	-16,7	-12,3	-12,3	384	-22,8	-18,5	-18,5	444	-28,8	-24,1	-24,1	504	-34,6	-29,6	-29,6	564	-40,3	-35,0	-35,0
326	-16,9	-12,6	-12,6	386	-23,0	-18,7	-18,7	446	-29,0	-24,3	-24,3	506	-34,8	-29,8	-29,8	566	-40,5	-35,2	-35,2
328	-17,1	-12,8	-12,8	388	-23,2	-18,9	-18,9	448	-29,2	-24,5	-24,5	508	-35,0	-30,0	-30,0	568	-40,7	-35,3	-35,3
330	-17,3	-13,0	-13,0	390	-23,4	-19,1	-19,1	450	-29,4	-24,7	-24,7	510	-35,2	-30,2	-30,2	570	-40,8	-35,5	-35,5
332	-17,5	-13,2	-13,2	392	-23,6	-19,2	-19,2	452	-29,6	-24,9	-24,9	512	-35,4	-30,3	-30,3	572	-41,0	-35,7	-35,7
334	-17,7	-13,5	-13,5	394	-23,8	-19,4	-19,4	454	-29,8	-25,1	-25,1	514	-35,6	-30,5	-30,5	574	-41,2	-35,9	-35,9
336	-17,9	-13,7	-13,7	396	-24,0	-19,6	-19,6	456	-30,0	-25,2	-25,2	516	-35,7	-30,7	-30,7	576	-41,4	-36,0	-36,0
338	-18,1	-13,9	-13,9	398	-24,2	-19,8	-19,8	458	-30,2	-25,4	-25,4	518	-35,9	-30,9	-30,9	578	-41,5	-36,2	-36,2
340	-18,3	-14,1	-14,1	400	-24,4	-20,0	-20,0	460	-30,4	-25,6	-25,6	520	-36,1	-31,1	-31,1	580	-41,7	-36,4	-36,4
342	-18,5	-14,3	-14,3	402	-24,6	-20,2	-20,2	462	-30,6	-25,8	-25,8	522	-36,3	-31,2	-31,2	582	-41,9	-36,6	-36,6
344	-18,7	-14,5	-14,5	404	-24,8	-20,4	-20,4	464	-30,8	-26,0	-26,0	524	-36,5	-31,4	-31,4	584	-42,1	-36,7	-36,7
346	-18,9	-14,7	-14,7	406	-25,0	-20,6	-20,6	466	-31,0	-26,2	-26,2	526	-36,7	-31,6	-31,6	586	-42,2	-36,9	-36,9
348	-19,1	-14,9	-14,9	408	-25,2	-20,7	-20,7	468	-31,1	-26,4	-26,4	528	-36,9	-31,8	-31,8	588	-42,4	-37,1	-37,1
350	-19,3	-15,1	-15,1	410	-25,4	-20,9	-20,9	470	-31,3	-26,5	-26,5	530	-37,1	-31,9	-31,9	590	-42,6	-37,2	-37,2
352	-19,5	-15,3	-15,3	412	-25,6	-21,1	-21,1	472	-31,5	-26,7	-26,7	532	-37,3	-32,1	-32,1	592	-42,7	-37,4	-37,4
354	-19,7	-15,5	-15,5	414	-25,8	-21,3	-21,3	474	-31,7	-26,9	-26,9	534	-37,5	-32,3	-32,3	594	-42,9	-37,6	-37,6
356	-19,9	-15,7	-15,7	416	-26,0	-21,5	-21,5	476	-31,9	-27,1	-27,1	536	-37,6	-32,5	-32,5	596	-43,1	-37,7	-37,7
358	-20,2	-15,9	-15,9	418	-26,2	-21,7	-21,7	478	-32,1	-27,3	-27,3	538	-37,8	-32,7	-32,7	598	-43,2	-37,9	-37,9
																600	-43,4	-38,1	-38,1

Potencial motenja referenčnega omrežja 1 za 1 % časa

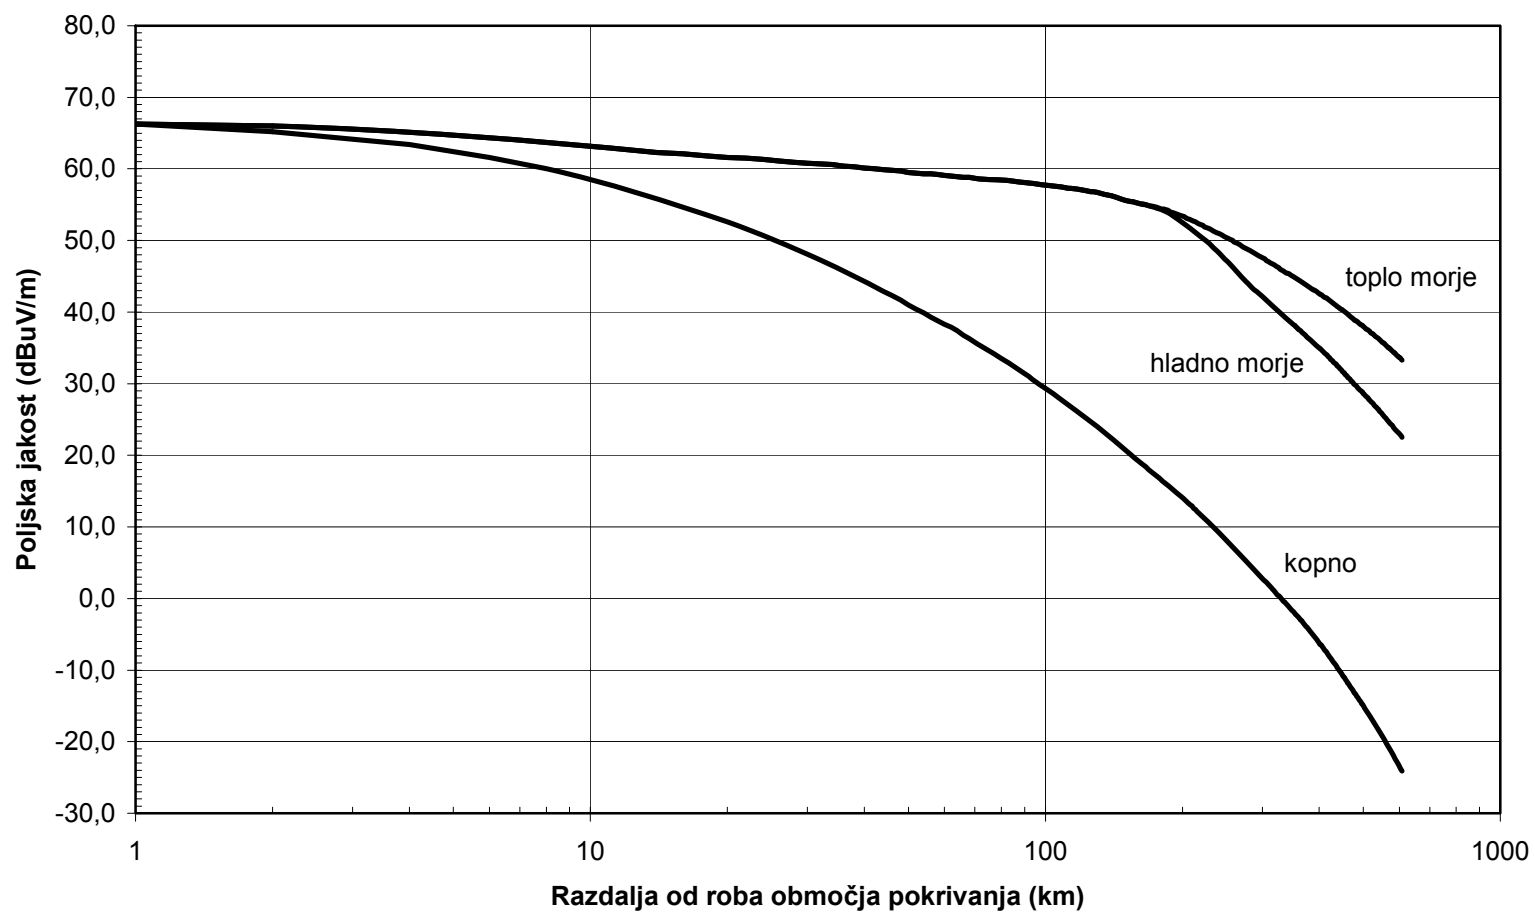

Slika 6b: Potencial motenja referenčnega omrežja ena za 1 % časa


Razpredelnica 5b: Razpredelnične vrednosti za potencial motenja referenčnega omrežja 1 za 1 % časa – (1)

Razdalja (km)	Kopno	Hladno morje	Toplo morje	Razdalja (km)	Kopno	Hladno morje	Toplo morje	Razdalja (km)	Kopno	Hladno morje	Toplo morje	Razdalja (km)	Kopno	Hladno morje	Toplo morje	Razdalja (km)	Kopno	Hladno morje	Toplo morje
0	67,1	67,1	67,1	60	38,3	59,1	59,1	120	25,7	57,1	57,1	180	16,5	54,3	54,4	240	9,3	48,4	51,0
2	65,2	66,0	66,0	62	37,9	59,0	59,0	122	25,3	57,0	57,0	182	16,3	54,2	54,4	242	9,1	48,1	50,9
4	63,4	65,1	65,1	64	37,4	58,9	58,9	124	25,0	56,9	56,9	184	16,0	54,0	54,3	244	8,8	47,9	50,8
6	61,6	64,4	64,4	66	36,8	58,8	58,8	126	24,7	56,8	56,8	186	15,8	53,9	54,2	246	8,6	47,7	50,7
8	60,0	63,7	63,7	68	36,3	58,8	58,8	128	24,3	56,8	56,8	188	15,5	53,7	54,0	248	8,4	47,4	50,5
10	58,5	63,2	63,2	70	35,8	58,7	58,7	130	24,0	56,7	56,7	190	15,3	53,5	53,9	250	8,1	47,2	50,4
12	57,1	62,7	62,7	72	35,3	58,6	58,6	132	23,7	56,6	56,6	192	15,0	53,3	53,8	252	7,9	47,0	50,3
14	55,8	62,3	62,3	74	34,8	58,5	58,5	134	23,3	56,5	56,5	194	14,8	53,1	53,7	254	7,7	46,8	50,2
16	54,6	62,1	62,1	76	34,4	58,5	58,5	136	23,0	56,4	56,4	196	14,6	52,9	53,6	256	7,4	46,5	50,1
18	53,6	61,8	61,8	78	34,0	58,5	58,5	138	22,7	56,3	56,3	198	14,3	52,7	53,5	258	7,2	46,3	50,0
20	52,6	61,6	61,6	80	33,5	58,4	58,4	140	22,3	56,2	56,2	200	14,1	52,5	53,4	260	7,0	46,1	49,8
22	51,6	61,5	61,5	82	33,1	58,4	58,4	142	22,0	56,1	56,1	202	13,8	52,3	53,3	262	6,8	45,8	49,7
24	50,7	61,3	61,3	84	32,7	58,3	58,3	144	21,7	56,0	56,0	204	13,6	52,1	53,1	264	6,5	45,6	49,6
26	49,8	61,1	61,1	86	32,2	58,2	58,2	146	21,4	55,8	55,8	206	13,3	51,9	53,0	266	6,3	45,4	49,5
28	48,9	60,9	60,9	88	31,8	58,2	58,2	148	21,0	55,7	55,7	208	13,1	51,7	52,9	268	6,1	45,1	49,4
30	48,1	60,8	60,8	90	31,4	58,1	58,1	150	20,7	55,6	55,6	210	12,9	51,5	52,8	270	5,9	44,9	49,2
32	47,3	60,7	60,7	92	31,0	58,0	58,0	152	20,4	55,5	55,5	212	12,6	51,3	52,7	272	5,7	44,7	49,1
34	46,5	60,6	60,6	94	30,5	57,9	57,9	154	20,1	55,4	55,4	214	12,4	51,1	52,6	274	5,5	44,5	49,0
36	45,7	60,4	60,4	96	30,1	57,9	57,9	156	19,8	55,4	55,4	216	12,1	50,9	52,4	276	5,2	44,3	48,9
38	45,0	60,3	60,3	98	29,7	57,8	57,8	158	19,5	55,3	55,3	218	11,9	50,7	52,3	278	5,0	44,1	48,8
40	44,3	60,1	60,1	100	29,3	57,7	57,7	160	19,2	55,2	55,2	220	11,6	50,5	52,2	280	4,8	43,9	48,7
42	43,6	60,0	60,0	102	29,0	57,7	57,7	162	18,9	55,1	55,1	222	11,4	50,3	52,1	282	4,6	43,6	48,6
44	42,9	59,9	59,9	104	28,6	57,6	57,6	164	18,7	55,0	55,1	224	11,2	50,1	51,9	284	4,4	43,5	48,5
46	42,3	59,8	59,8	106	28,2	57,5	57,5	166	18,4	55,0	55,0	226	10,9	49,9	51,8	286	4,2	43,3	48,3
48	41,7	59,7	59,7	108	27,8	57,5	57,5	168	18,1	54,9	54,9	228	10,7	49,7	51,7	288	4,0	43,1	48,2
50	41,0	59,5	59,5	110	27,5	57,4	57,4	170	17,8	54,8	54,8	230	10,5	49,5	51,6	290	3,8	43,0	48,1
52	40,4	59,4	59,4	112	27,1	57,3	57,3	172	17,6	54,7	54,8	232	10,2	49,3	51,5	292	3,6	42,8	48,0
54	39,9	59,3	59,3	114	26,7	57,3	57,3	174	17,3	54,6	54,7	234	10,0	49,0	51,3	294	3,4	42,7	47,9
56	39,3	59,3	59,3	116	26,4	57,2	57,2	176	17,0	54,5	54,6	236	9,8	48,8	51,2	296	3,2	42,5	47,8
58	38,8	59,2	59,2	118	26,0	57,1	57,1	178	16,8	54,4	54,5	238	9,5	48,6	51,1	298	3,0	42,3	47,7

Razpredelnica 5b: Razpredelnice vrednosti za potencial motenja referenčnega omrežja 1 za 1 % časa – (2)

Razdalja (km)	Kopno	Hladno morje	Toplo morje	Razdalja (km)	Kopno	Hladno morje	Toplo morje	Razdalja (km)	Kopno	Hladno morje	Toplo morje	Razdalja (km)	Kopno	Hladno morje	Toplo morje	Razdalja (km)	Kopno	Hladno morje	Toplo morje
300	2,8	42,2	47,6	360	-2,6	37,6	44,5	420	-8,0	33,7	41,7	480	-13,3	29,8	38,8	540	-18,4	26,4	36,3
302	2,6	42,0	47,5	362	-2,8	37,5	44,4	422	-8,2	33,6	41,6	482	-13,5	29,7	38,8	542	-18,5	26,2	36,2
304	2,4	41,8	47,4	364	-3,0	37,4	44,3	424	-8,3	33,4	41,5	484	-13,7	29,6	38,7	544	-18,7	26,1	36,1
306	2,3	41,7	47,2	366	-3,1	37,2	44,2	426	-8,5	33,3	41,4	486	-13,8	29,4	38,6	546	-18,9	26,0	36,0
308	2,1	41,5	47,1	368	-3,3	37,1	44,1	428	-8,7	33,2	41,3	488	-14,0	29,3	38,5	548	-19,0	25,9	35,9
310	1,9	41,3	47,0	370	-3,5	37,0	44,0	430	-8,9	33,0	41,2	490	-14,2	29,2	38,4	550	-19,2	25,8	35,8
312	1,7	41,2	46,9	372	-3,7	36,8	43,9	432	-9,1	32,9	41,1	492	-14,3	29,1	38,3	552	-19,4	25,7	35,7
314	1,5	41,0	46,8	374	-3,9	36,7	43,8	434	-9,2	32,8	41,0	494	-14,5	29,0	38,2	554	-19,5	25,5	35,7
316	1,3	40,9	46,7	376	-4,0	36,5	43,7	436	-9,4	32,7	40,9	496	-14,7	28,9	38,2	556	-19,7	25,4	35,6
318	1,1	40,7	46,6	378	-4,2	36,4	43,6	438	-9,6	32,5	40,8	498	-14,8	28,8	38,1	558	-19,9	25,3	35,5
320	0,9	40,5	46,5	380	-4,4	36,3	43,5	440	-9,8	32,4	40,7	500	-15,0	28,6	38,0	560	-20,1	25,2	35,4
322	0,7	40,4	46,4	382	-4,6	36,1	43,4	442	-10,0	32,3	40,6	502	-15,2	28,5	37,9	562	-20,2	25,1	35,3
324	0,5	40,2	46,3	384	-4,7	36,0	43,3	444	-10,1	32,1	40,5	504	-15,4	28,4	37,8	564	-20,4	25,0	35,2
326	0,4	40,1	46,2	386	-4,9	35,9	43,2	446	-10,3	32,0	40,4	506	-15,5	28,3	37,7	566	-20,6	24,8	35,1
328	0,2	39,9	46,0	388	-5,1	35,7	43,1	448	-10,5	31,9	40,4	508	-15,7	28,2	37,6	568	-20,7	24,7	35,0
330	0,0	39,7	45,9	390	-5,3	35,6	43,1	450	-10,7	31,7	40,3	510	-15,9	28,1	37,6	570	-20,9	24,6	35,0
332	-0,2	39,6	45,8	392	-5,5	35,5	43,0	452	-10,9	31,6	40,2	512	-16,0	28,0	37,5	572	-21,1	24,5	34,9
334	-0,4	39,4	45,7	394	-5,6	35,4	42,9	454	-11,0	31,5	40,1	514	-16,2	27,8	37,4	574	-21,2	24,4	34,8
336	-0,5	39,3	45,6	396	-5,8	35,2	42,8	456	-11,2	31,3	40,0	516	-16,4	27,7	37,3	576	-21,4	24,3	34,7
338	-0,7	39,2	45,5	398	-6,0	35,1	42,7	458	-11,4	31,2	39,9	518	-16,5	27,6	37,2	578	-21,6	24,2	34,6
340	-0,9	39,0	45,4	400	-6,2	35,0	42,6	460	-11,6	31,1	39,8	520	-16,7	27,5	37,1	580	-21,7	24,1	34,5
342	-1,1	38,9	45,4	402	-6,4	34,9	42,5	462	-11,8	30,9	39,7	522	-16,9	27,4	37,0	582	-21,9	23,9	34,4
344	-1,2	38,8	45,3	404	-6,5	34,7	42,4	464	-11,9	30,8	39,6	524	-17,0	27,3	37,0	584	-22,1	23,8	34,3
346	-1,4	38,6	45,2	406	-6,7	34,6	42,3	466	-12,1	30,7	39,5	526	-17,2	27,2	36,9	586	-22,3	23,7	34,3
348	-1,6	38,5	45,1	408	-6,9	34,5	42,2	468	-12,3	30,6	39,4	528	-17,4	27,0	36,8	588	-22,4	23,6	34,2
350	-1,8	38,3	45,0	410	-7,1	34,3	42,1	470	-12,5	30,4	39,3	530	-17,5	26,9	36,7	590	-22,6	23,5	34,1
352	-1,9	38,2	44,9	412	-7,3	34,2	42,0	472	-12,6	30,3	39,2	532	-17,7	26,8	36,6	592	-22,8	23,4	34,0
354	-2,1	38,1	44,8	414	-7,4	34,1	42,0	474	-12,8	30,2	39,1	534	-17,9	26,7	36,5	594	-22,9	23,3	33,9
356	-2,3	37,9	44,7	416	-7,6	34,0	41,9	476	-13,0	30,0	39,0	536	-18,0	26,6	36,4	596	-23,1	23,2	33,8
358	-2,4	37,8	44,6	418	-7,8	33,8	41,8	478	-13,2	29,9	38,9	538	-18,2	26,5	36,4	598	-23,3	23,1	33,7
																600	-23,5	23,0	33,7

Potencial motenja referenčnega omrežja 2 za 50 % časa

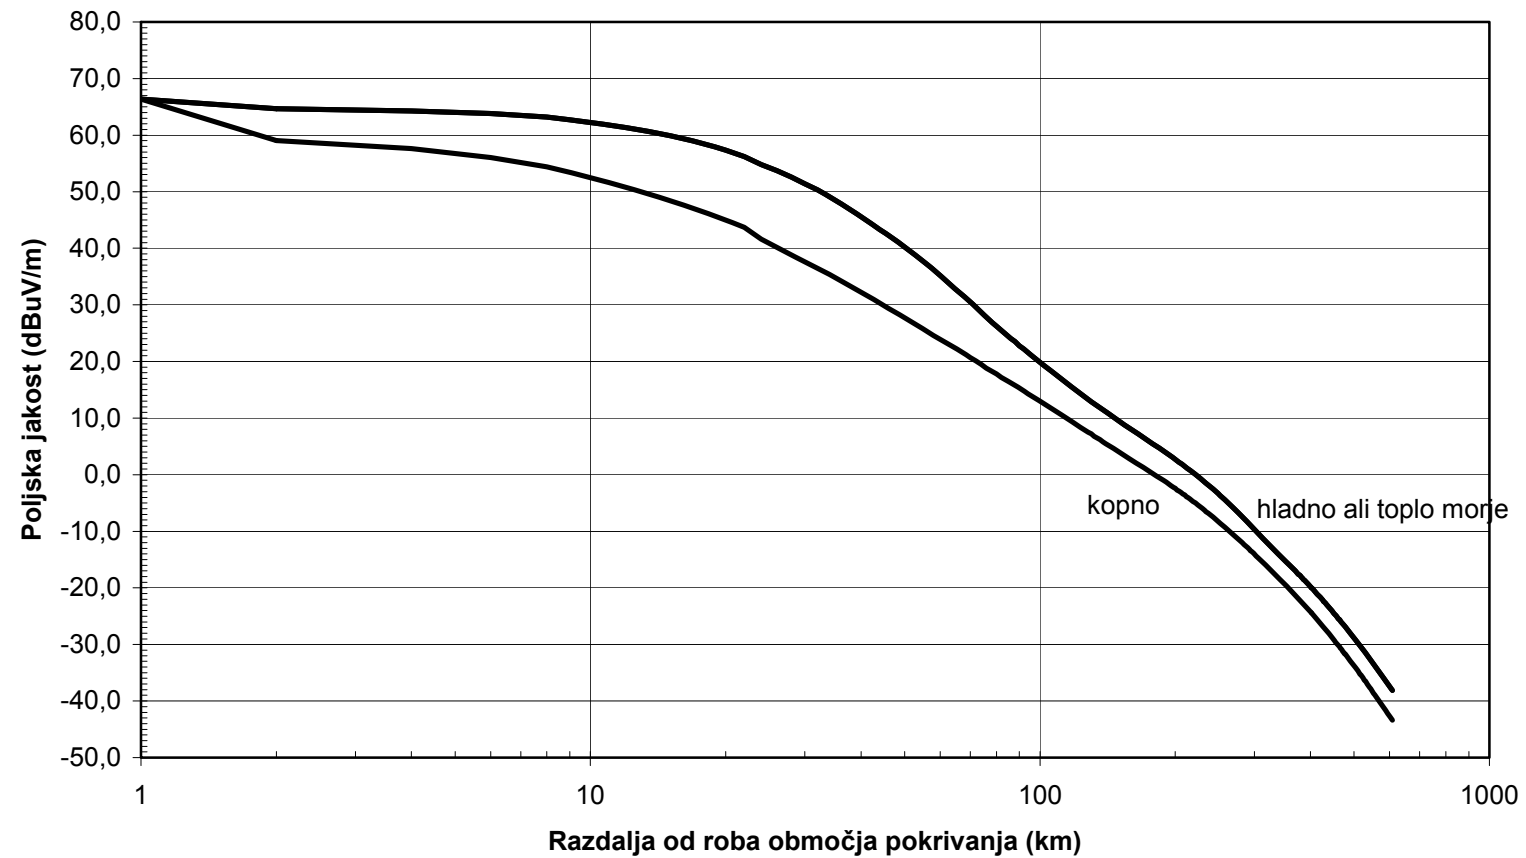

Slika 7a: Potencial motenja referenčnega omrežja dve za 50 % časa


Razpredelnica 6a: Razpredelnične vrednosti za potencial motenja referenčnega omrežja 2 za 50 % časa – (1)

Razdalja (km)	Kopno	Hladno morje	Toplo morje	Razdalja (km)	Kopno	Hladno morje	Toplo morje	Razdalja (km)	Kopno	Hladno morje	Toplo morje	Razdalja (km)	Kopno	Hladno morje	Toplo morje	Razdalja (km)	Kopno	Hladno morje	Toplo morje
0	68,1	68,1	68,1	60	23,9	35,2	35,2	120	8,9	15,0	15,0	180	0,0	5,2	5,2	240	-7,2	-2,2	-2,2
2	59,0	64,7	64,7	62	23,3	34,2	34,2	122	8,6	14,6	14,6	182	-0,3	5,0	5,0	242	-7,4	-2,4	-2,4
4	57,6	64,3	64,3	64	22,6	33,2	33,2	124	8,2	14,1	14,1	184	-0,5	4,7	4,7	244	-7,6	-2,7	-2,7
6	56,0	63,8	63,8	66	22,0	32,3	32,3	126	7,8	13,7	13,7	186	-0,7	4,5	4,5	246	-7,9	-2,9	-2,9
8	54,4	63,2	63,2	68	21,4	31,4	31,4	128	7,5	13,3	13,3	188	-1,0	4,2	4,2	248	-8,1	-3,2	-3,2
10	52,5	62,3	62,3	70	20,7	30,5	30,5	130	7,2	12,9	12,9	190	-1,2	4,0	4,0	250	-8,4	-3,4	-3,4
12	50,7	61,3	61,3	72	20,1	29,6	29,6	132	6,8	12,6	12,6	192	-1,5	3,7	3,7	252	-8,6	-3,7	-3,7
14	49,2	60,4	60,4	74	19,5	28,7	28,7	134	6,5	12,2	12,2	194	-1,7	3,5	3,5	254	-8,8	-3,9	-3,9
16	47,7	59,5	59,5	76	18,8	27,8	27,8	136	6,2	11,8	11,8	196	-2,0	3,2	3,2	256	-9,1	-4,2	-4,2
18	46,3	58,4	58,4	78	18,3	27,0	27,0	138	5,8	11,5	11,5	198	-2,2	3,0	3,0	258	-9,3	-4,4	-4,4
20	45,0	57,3	57,3	80	17,8	26,2	26,2	140	5,5	11,1	11,1	200	-2,4	2,7	2,7	260	-9,5	-4,7	-4,7
22	43,7	56,2	56,2	82	17,2	25,5	25,5	142	5,2	10,8	10,8	202	-2,7	2,5	2,5	262	-9,7	-4,9	-4,9
24	41,6	54,8	54,8	84	16,7	24,8	24,8	144	4,9	10,4	10,4	204	-2,9	2,2	2,2	264	-10,0	-5,2	-5,2
26	40,2	53,7	53,7	86	16,2	24,1	24,1	146	4,6	10,1	10,1	206	-3,1	2,0	2,0	266	-10,2	-5,4	-5,4
28	38,8	52,6	52,6	88	15,8	23,5	23,5	148	4,3	9,8	9,8	208	-3,4	1,7	1,7	268	-10,4	-5,7	-5,7
30	37,6	51,4	51,4	90	15,3	22,8	22,8	150	4,0	9,5	9,5	210	-3,6	1,5	1,5	270	-10,7	-5,9	-5,9
32	36,5	50,3	50,3	92	14,8	22,2	22,2	152	3,7	9,1	9,1	212	-3,9	1,2	1,2	272	-10,9	-6,2	-6,2
34	35,4	49,1	49,1	94	14,3	21,6	21,6	154	3,4	8,8	8,8	214	-4,1	1,0	1,0	274	-11,1	-6,4	-6,4
36	34,3	47,9	47,9	96	13,9	21,0	21,0	156	3,1	8,5	8,5	216	-4,3	0,8	0,8	276	-11,3	-6,7	-6,7
38	33,2	46,7	46,7	98	13,4	20,4	20,4	158	2,8	8,2	8,2	218	-4,6	0,5	0,5	278	-11,6	-6,9	-6,9
40	32,2	45,6	45,6	100	13,0	19,8	19,8	160	2,6	8,0	8,0	220	-4,8	0,3	0,3	280	-11,8	-7,2	-7,2
42	31,3	44,4	44,4	102	12,6	19,3	19,3	162	2,3	7,7	7,7	222	-5,0	0,0	0,0	282	-12,0	-7,4	-7,4
44	30,3	43,3	43,3	104	12,1	18,8	18,8	164	2,0	7,4	7,4	224	-5,3	-0,2	-0,2	284	-12,2	-7,7	-7,7
46	29,4	42,3	42,3	106	11,7	18,3	18,3	166	1,8	7,1	7,1	226	-5,5	-0,5	-0,5	286	-12,5	-7,9	-7,9
48	28,6	41,3	41,3	108	11,3	17,8	17,8	168	1,5	6,8	6,8	228	-5,7	-0,7	-0,7	288	-12,7	-8,2	-8,2
50	27,7	40,2	40,2	110	10,9	17,3	17,3	170	1,3	6,6	6,6	230	-6,0	-1,0	-1,0	290	-12,9	-8,4	-8,4
52	26,9	39,2	39,2	112	10,5	16,8	16,8	172	1,0	6,3	6,3	232	-6,2	-1,2	-1,2	292	-13,1	-8,7	-8,7
54	26,1	38,2	38,2	114	10,1	16,3	16,3	174	0,7	6,0	6,0	234	-6,5	-1,5	-1,5	294	-13,4	-8,9	-8,9
56	25,4	37,2	37,2	116	9,7	15,9	15,9	176	0,5	5,7	5,7	236	-6,7	-1,7	-1,7	296	-13,6	-9,2	-9,2
58	24,6	36,2	36,2	118	9,3	15,4	15,4	178	0,2	5,5	5,5	238	-6,9	-2,0	-2,0	298	-13,8	-9,4	-9,4

Razpredelnica 6a: Razpredelnične vrednosti za potencial motenja referenčnega omrežja 2 za 50 % časa – (2)

Razdalja (km)	Kopno	Hladno morje	Toplo morje	Razdalja (km)	Kopno	Hladno morje	Toplo morje	Razdalja (km)	Kopno	Hladno morje	Toplo morje	Razdalja (km)	Kopno	Hladno morje	Toplo morje	Razdalja (km)	Kopno	Hladno morje	Toplo morje
300	-14,0	-9,7	-9,7	360	-20,3	-16,0	-16,0	420	-26,2	-21,6	-21,6	480	-31,9	-27,1	-27,1	540	-37,5	-32,4	-32,4
302	-14,3	-9,9	-9,9	362	-20,5	-16,2	-16,2	422	-26,4	-21,8	-21,8	482	-32,1	-27,2	-27,2	542	-37,6	-32,5	-32,5
304	-14,5	-10,2	-10,2	364	-20,7	-16,4	-16,4	424	-26,6	-22,0	-22,0	484	-32,3	-27,4	-27,4	544	-37,8	-32,7	-32,7
306	-14,7	-10,4	-10,4	366	-20,9	-16,6	-16,6	426	-26,8	-22,2	-22,2	486	-32,5	-27,6	-27,6	546	-38,0	-32,9	-32,9
308	-14,9	-10,6	-10,6	368	-21,1	-16,8	-16,8	428	-27,0	-22,4	-22,4	488	-32,7	-27,8	-27,8	548	-38,2	-33,1	-33,1
310	-15,1	-10,9	-10,9	370	-21,3	-17,0	-17,0	430	-27,2	-22,5	-22,5	490	-32,9	-28,0	-28,0	550	-38,4	-33,2	-33,2
312	-15,3	-11,1	-11,1	372	-21,5	-17,2	-17,2	432	-27,3	-22,7	-22,7	492	-33,0	-28,1	-28,1	552	-38,6	-33,4	-33,4
314	-15,6	-11,3	-11,3	374	-21,7	-17,4	-17,4	434	-27,5	-22,9	-22,9	494	-33,2	-28,3	-28,3	554	-38,8	-33,6	-33,6
316	-15,8	-11,5	-11,5	376	-21,9	-17,6	-17,6	436	-27,7	-23,1	-23,1	496	-33,4	-28,5	-28,5	556	-38,9	-33,8	-33,8
318	-16,0	-11,8	-11,8	378	-22,1	-17,7	-17,7	438	-27,9	-23,3	-23,3	498	-33,6	-28,7	-28,7	558	-39,1	-33,9	-33,9
320	-16,2	-12,0	-12,0	380	-22,3	-17,9	-17,9	440	-28,1	-23,5	-23,5	500	-33,8	-28,8	-28,8	560	-39,3	-34,1	-34,1
322	-16,4	-12,2	-12,2	382	-22,5	-18,1	-18,1	442	-28,3	-23,6	-23,6	502	-34,0	-29,0	-29,0	562	-39,5	-34,3	-34,3
324	-16,6	-12,4	-12,4	384	-22,7	-18,3	-18,3	444	-28,5	-23,8	-23,8	504	-34,1	-29,2	-29,2	564	-39,6	-34,4	-34,4
326	-16,8	-12,6	-12,6	386	-22,9	-18,5	-18,5	446	-28,7	-24,0	-24,0	506	-34,3	-29,4	-29,4	566	-39,8	-34,6	-34,6
328	-17,0	-12,8	-12,8	388	-23,1	-18,7	-18,7	448	-28,9	-24,2	-24,2	508	-34,5	-29,5	-29,5	568	-40,0	-34,8	-34,8
330	-17,2	-13,1	-13,1	390	-23,3	-18,9	-18,9	450	-29,1	-24,4	-24,4	510	-34,7	-29,7	-29,7	570	-40,1	-35,0	-35,0
332	-17,5	-13,3	-13,3	392	-23,5	-19,0	-19,0	452	-29,3	-24,6	-24,6	512	-34,9	-29,9	-29,9	572	-40,3	-35,1	-35,1
334	-17,7	-13,5	-13,5	394	-23,7	-19,2	-19,2	454	-29,5	-24,7	-24,7	514	-35,1	-30,1	-30,1	574	-40,5	-35,3	-35,3
336	-17,9	-13,7	-13,7	396	-23,9	-19,4	-19,4	456	-29,7	-24,9	-24,9	516	-35,3	-30,2	-30,2	576	-40,7	-35,5	-35,5
338	-18,1	-13,9	-13,9	398	-24,0	-19,6	-19,6	458	-29,9	-25,1	-25,1	518	-35,4	-30,4	-30,4	578	-40,8	-35,6	-35,6
340	-18,3	-14,1	-14,1	400	-24,2	-19,8	-19,8	460	-30,0	-25,3	-25,3	520	-35,6	-30,6	-30,6	580	-41,0	-35,8	-35,8
342	-18,5	-14,3	-14,3	402	-24,4	-20,0	-20,0	462	-30,2	-25,5	-25,5	522	-35,8	-30,8	-30,8	582	-41,2	-36,0	-36,0
344	-18,7	-14,5	-14,5	404	-24,6	-20,1	-20,1	464	-30,4	-25,6	-25,6	524	-36,0	-31,0	-31,0	584	-41,3	-36,1	-36,1
346	-18,9	-14,7	-14,7	406	-24,8	-20,3	-20,3	466	-30,6	-25,8	-25,8	526	-36,2	-31,1	-31,1	586	-41,5	-36,3	-36,3
348	-19,1	-14,9	-14,9	408	-25,0	-20,5	-20,5	468	-30,8	-26,0	-26,0	528	-36,4	-31,3	-31,3	588	-41,7	-36,5	-36,5
350	-19,3	-15,1	-15,1	410	-25,2	-20,7	-20,7	470	-31,0	-26,2	-26,2	530	-36,5	-31,5	-31,5	590	-41,8	-36,6	-36,6
352	-19,5	-15,3	-15,3	412	-25,4	-20,9	-20,9	472	-31,2	-26,4	-26,4	532	-36,7	-31,7	-31,7	592	-42,0	-36,8	-36,8
354	-19,7	-15,5	-15,5	414	-25,6	-21,1	-21,1	474	-31,4	-26,5	-26,5	534	-36,9	-31,8	-31,8	594	-42,2	-37,0	-37,0
356	-19,9	-15,7	-15,7	416	-25,8	-21,3	-21,3	476	-31,6	-26,7	-26,7	536	-37,1	-32,0	-32,0	596	-42,3	-37,1	-37,1
358	-20,1	-15,9	-15,9	418	-26,0	-21,4	-21,4	478	-31,7	-26,9	-26,9	538	-37,3	-32,2	-32,2	598	-42,5	-37,3	-37,3
																600	-42,7	-37,5	-37,5

Potencial motenja referenčnega omrežja 2 za 1 % časa

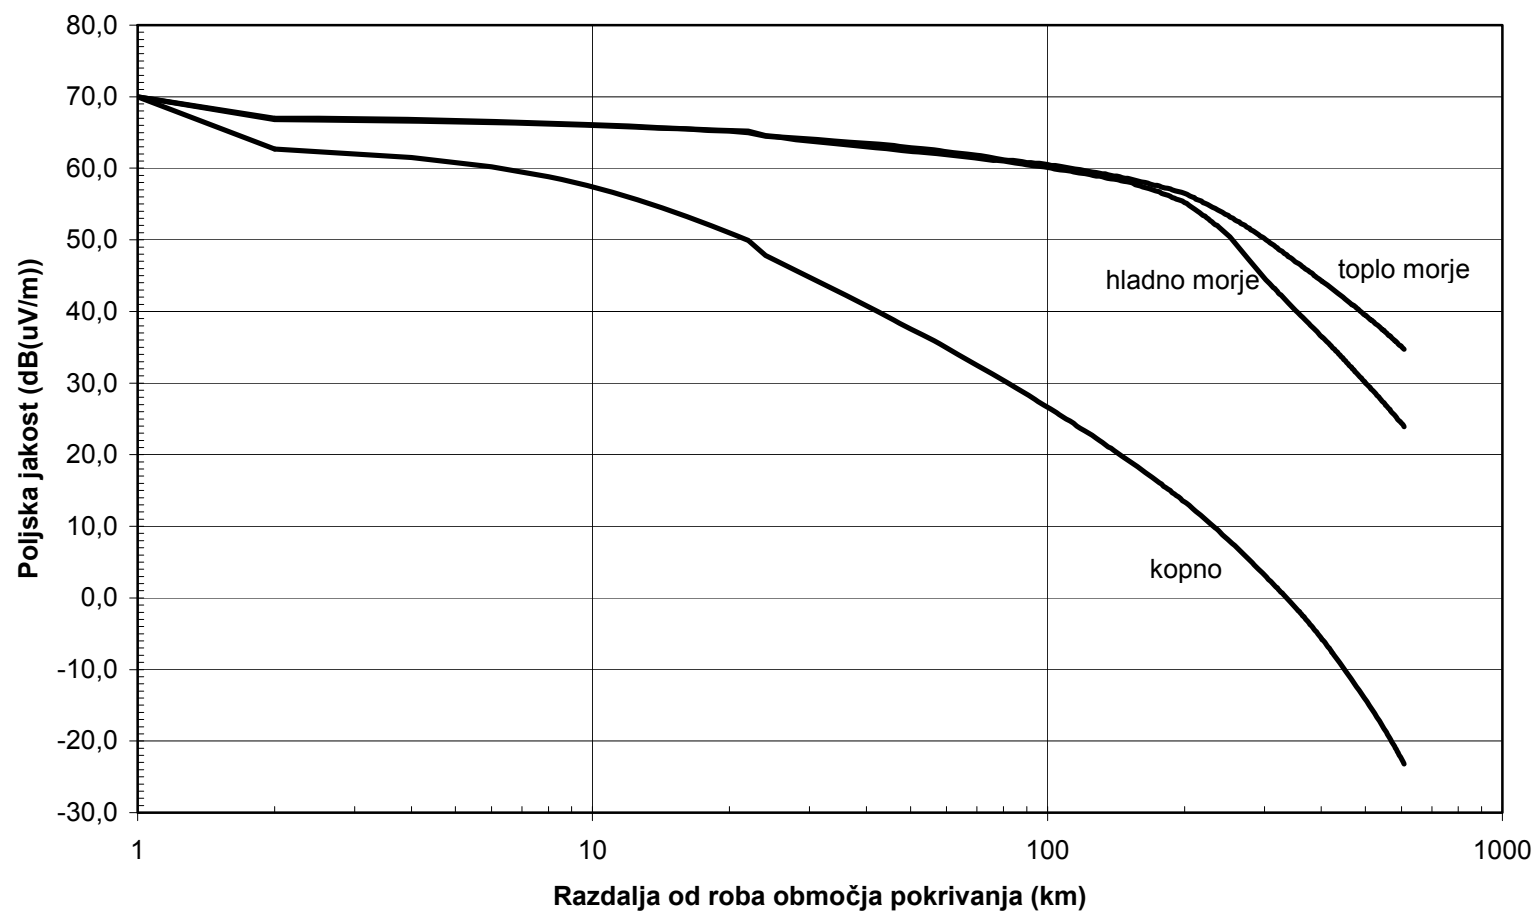

Slika 7b: Potencial motenja referenčnega omrežja dve za 1 % časa


Razpredelnica 6b: Razpredelnične vrednosti za potencial motenja referenčnega omrežja 2 za 1 % časa – (1)

Razdalja (km)	Kopno	Hladno morje	Toplo morje	Razdalja (km)	Kopno	Hladno morje	Toplo morje	Razdalja (km)	Kopno	Hladno morje	Toplo morje	Razdalja (km)	Kopno	Hladno morje	Toplo morje	Razdalja (km)	Kopno	Hladno morje	Toplo morje
0	72,5	72,5	72,5	60	34,9	61,9	62,3	120	23,4	59,3	59,7	180	15,6	56,4	57,3	240	9,1	51,6	54,0
2	62,7	66,8	67,0	62	34,4	61,8	62,2	122	23,2	59,2	59,6	182	15,4	56,3	57,2	242	8,9	51,4	53,9
4	61,5	66,6	66,8	64	33,9	61,7	62,1	124	22,9	59,1	59,5	184	15,2	56,2	57,2	244	8,7	51,2	53,7
6	60,2	66,4	66,6	66	33,4	61,6	62,0	126	22,6	59,0	59,5	186	15,0	56,1	57,1	246	8,5	51,0	53,6
8	58,8	66,2	66,3	68	32,9	61,5	61,9	128	22,3	58,9	59,4	188	14,7	55,9	57,0	248	8,3	50,8	53,5
10	57,4	66,0	66,1	70	32,5	61,4	61,8	130	22,0	58,9	59,3	190	14,5	55,8	56,9	250	8,1	50,6	53,4
12	56,0	65,8	65,9	72	32,1	61,3	61,7	132	21,7	58,8	59,2	192	14,3	55,7	56,8	252	7,9	50,4	53,2
14	54,6	65,6	65,7	74	31,6	61,2	61,6	134	21,4	58,7	59,2	194	14,1	55,6	56,7	254	7,7	50,1	53,1
16	53,3	65,5	65,5	76	31,2	61,1	61,4	136	21,1	58,6	59,1	196	13,9	55,5	56,7	256	7,5	49,9	53,0
18	52,1	65,3	65,4	78	30,8	61,1	61,3	138	20,9	58,5	59,0	198	13,6	55,4	56,6	258	7,3	49,6	52,8
20	51,0	65,2	65,3	80	30,4	61,0	61,2	140	20,6	58,5	58,9	200	13,4	55,2	56,5	260	7,1	49,4	52,7
22	49,9	65,0	65,2	82	30,0	60,9	61,1	142	20,3	58,4	58,9	202	13,2	55,1	56,4	262	6,9	49,1	52,6
24	47,8	64,5	64,6	84	29,6	60,8	61,1	144	20,0	58,3	58,8	204	13,0	54,9	56,2	264	6,7	48,9	52,5
26	46,7	64,3	64,4	86	29,2	60,7	61,0	146	19,8	58,2	58,7	206	12,8	54,7	56,1	266	6,5	48,6	52,3
28	45,7	64,0	64,2	88	28,8	60,6	60,9	148	19,5	58,2	58,6	208	12,5	54,5	56,0	268	6,3	48,4	52,2
30	44,8	63,8	64,1	90	28,4	60,5	60,8	150	19,3	58,1	58,6	210	12,3	54,3	55,9	270	6,1	48,1	52,1
32	43,9	63,6	64,0	92	28,1	60,4	60,8	152	19,0	58,0	58,5	212	12,1	54,2	55,7	272	5,9	47,9	52,0
34	43,1	63,5	63,8	94	27,7	60,3	60,7	154	18,8	57,9	58,4	214	11,9	54,0	55,6	274	5,7	47,6	51,8
36	42,3	63,3	63,7	96	27,3	60,3	60,7	156	18,5	57,7	58,3	216	11,7	53,8	55,5	276	5,5	47,4	51,7
38	41,5	63,2	63,6	98	27,0	60,2	60,6	158	18,3	57,6	58,2	218	11,5	53,6	55,4	278	5,3	47,1	51,6
40	40,8	63,0	63,5	100	26,6	60,1	60,5	160	18,0	57,5	58,1	220	11,3	53,4	55,2	280	5,1	46,9	51,4
42	40,1	62,9	63,4	102	26,3	60,0	60,4	162	17,8	57,4	58,1	222	11,0	53,3	55,1	282	4,9	46,7	51,3
44	39,4	62,8	63,3	104	26,0	59,9	60,4	164	17,5	57,3	58,0	224	10,8	53,1	55,0	284	4,7	46,4	51,2
46	38,8	62,6	63,2	106	25,6	59,8	60,3	166	17,3	57,2	57,9	226	10,6	52,9	54,9	286	4,5	46,2	51,1
48	38,1	62,5	63,0	108	25,3	59,7	60,2	168	17,0	57,1	57,8	228	10,4	52,7	54,7	288	4,3	46,0	50,9
50	37,6	62,4	62,9	110	25,0	59,7	60,1	170	16,8	57,0	57,7	230	10,2	52,5	54,6	290	4,1	45,7	50,8
52	37,0	62,3	62,8	112	24,7	59,6	60,0	172	16,6	56,9	57,6	232	10,0	52,3	54,5	292	3,9	45,5	50,7
54	36,5	62,2	62,7	114	24,4	59,5	59,9	174	16,3	56,8	57,6	234	9,8	52,1	54,4	294	3,8	45,3	50,5
56	36,0	62,1	62,6	116	24,0	59,4	59,9	176	16,1	56,7	57,5	236	9,6	52,0	54,2	296	3,6	45,1	50,4
58	35,5	62,0	62,5	118	23,7	59,3	59,8	178	15,9	56,5	57,4	238	9,4	51,8	54,1	298	3,4	44,8	50,3

Razpredelnica 6b: Razpredelnične vrednosti za potencial motenja referenčnega omrežja 2 za 1 % časa – (2)

Razdalja (km)	Kopno	Hladno morje	Toplo morje	Razdalja (km)	Kopno	Hladno morje	Toplo morje	Razdalja (km)	Kopno	Hladno morje	Toplo morje	Razdalja (km)	Kopno	Hladno morje	Toplo morje	Razdalja (km)	Kopno	Hladno morje	Toplo morje
300	3,2	44,6	50,2	360	-2,1	39,5	46,5	420	-7,4	35,2	43,3	480	-12,6	31,3	40,4	540	-17,5	27,7	37,7
302	3,0	44,4	50,0	362	-2,3	39,3	46,4	422	-7,6	35,1	43,2	482	-12,7	31,1	40,3	542	-17,6	27,6	37,6
304	2,8	44,2	49,9	364	-2,5	39,2	46,2	424	-7,7	34,9	43,1	484	-12,9	31,0	40,2	544	-17,8	27,5	37,5
306	2,6	44,1	49,8	366	-2,6	39,0	46,1	426	-7,9	34,8	43,0	486	-13,0	30,9	40,1	546	-18,0	27,4	37,4
308	2,4	43,9	49,6	368	-2,8	38,9	46,0	428	-8,1	34,7	42,9	488	-13,2	30,8	40,0	548	-18,1	27,3	37,4
310	2,3	43,7	49,5	370	-3,0	38,7	45,9	430	-8,3	34,5	42,8	490	-13,4	30,7	39,9	550	-18,3	27,2	37,3
312	2,1	43,5	49,4	372	-3,2	38,6	45,8	432	-8,4	34,4	42,7	492	-13,5	30,5	39,8	552	-18,5	27,1	37,2
314	1,9	43,3	49,3	374	-3,3	38,4	45,7	434	-8,6	34,3	42,6	494	-13,7	30,4	39,7	554	-18,6	26,9	37,1
316	1,7	43,2	49,1	376	-3,5	38,3	45,6	436	-8,8	34,1	42,5	496	-13,9	30,3	39,6	556	-18,8	26,8	37,0
318	1,5	43,0	49,0	378	-3,7	38,1	45,5	438	-9,0	34,0	42,4	498	-14,0	30,2	39,5	558	-19,0	26,7	36,9
320	1,4	42,8	48,9	380	-3,9	38,0	45,4	440	-9,1	33,9	42,3	500	-14,2	30,0	39,5	560	-19,1	26,6	36,8
322	1,2	42,6	48,7	382	-4,0	37,8	45,3	442	-9,3	33,7	42,2	502	-14,4	29,9	39,4	562	-19,3	26,5	36,7
324	1,0	42,4	48,6	384	-4,2	37,7	45,2	444	-9,5	33,6	42,1	504	-14,5	29,8	39,3	564	-19,5	26,4	36,6
326	0,8	42,3	48,5	386	-4,4	37,6	45,0	446	-9,7	33,5	42,0	506	-14,7	29,7	39,2	566	-19,6	26,3	36,6
328	0,7	42,1	48,4	388	-4,6	37,4	44,9	448	-9,8	33,3	41,9	508	-14,9	29,6	39,1	568	-19,8	26,1	36,5
330	0,5	41,9	48,2	390	-4,7	37,3	44,8	450	-10,0	33,2	41,8	510	-15,0	29,5	39,0	570	-20,0	26,0	36,4
332	0,3	41,8	48,1	392	-4,9	37,1	44,7	452	-10,2	33,1	41,7	512	-15,2	29,4	38,9	572	-20,1	25,9	36,3
334	0,1	41,6	48,0	394	-5,1	37,0	44,6	454	-10,4	32,9	41,6	514	-15,3	29,2	38,8	574	-20,3	25,8	36,2
336	0,0	41,4	47,9	396	-5,3	36,8	44,5	456	-10,5	32,8	41,5	516	-15,5	29,1	38,8	576	-20,5	25,7	36,1
338	-0,2	41,2	47,7	398	-5,4	36,7	44,4	458	-10,7	32,7	41,4	518	-15,7	29,0	38,7	578	-20,6	25,6	36,0
340	-0,4	41,1	47,6	400	-5,6	36,5	44,3	460	-10,9	32,5	41,3	520	-15,8	28,9	38,6	580	-20,8	25,5	35,9
342	-0,6	40,9	47,5	402	-5,8	36,4	44,2	462	-11,0	32,4	41,2	522	-16,0	28,8	38,5	582	-21,0	25,4	35,9
344	-0,7	40,7	47,4	404	-6,0	36,3	44,1	464	-11,2	32,3	41,1	524	-16,2	28,7	38,4	584	-21,1	25,3	35,8
7346	-0,9	40,6	47,3	406	-6,1	36,1	44,0	466	-11,4	32,2	41,0	526	-16,3	28,6	38,3	586	-21,3	25,1	35,7
348	-1,1	40,4	47,1	408	-6,3	36,0	43,9	468	-11,5	32,0	40,9	528	-16,5	28,4	38,2	588	-21,5	25,0	35,6
350	-1,3	40,2	47,0	410	-6,5	35,9	43,8	470	-11,7	31,9	40,9	530	-16,7	28,3	38,1	590	-21,6	24,9	35,5
352	-1,4	40,1	46,9	412	-6,7	35,7	43,7	472	-11,9	31,8	40,8	532	-16,8	28,2	38,1	592	-21,8	24,8	35,4
354	-1,6	39,9	46,8	414	-6,9	35,6	43,6	474	-12,1	31,6	40,7	534	-17,0	28,1	38,0	594	-22,0	24,7	35,3
356	-1,8	39,8	46,7	416	-7,0	35,5	43,5	476	-12,2	31,5	40,6	536	-17,1	28,0	37,9	596	-22,2	24,6	35,2
358	-1,9	39,6	46,6	418	-7,2	35,3	43,4	478	-12,4	31,4	40,5	538	-17,3	27,9	37,8	598	-22,3	24,5	35,2
																600	-22,5	24,4	35,1

Potencial motenja referenčnega omrežja 3 za 50 % časa

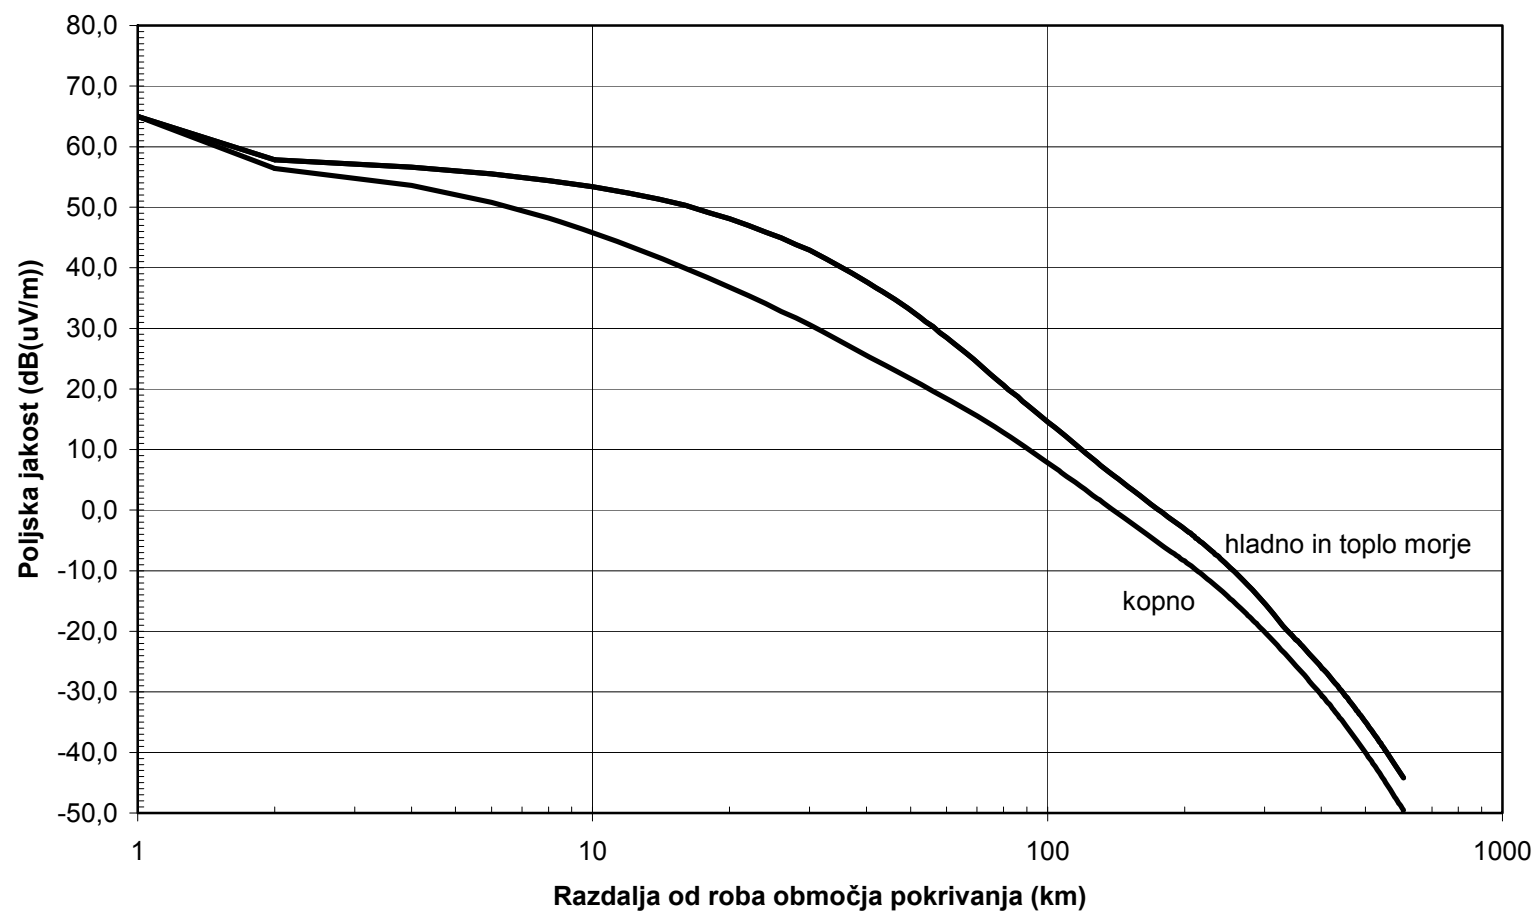

Slika 8a: potencial motenja referenčnega omrežja tri za 50 % časa


Razpredelnica 7a: Razpredelnične vrednosti za potencial motenja referenčnega omrežja 3 za 50 % časa – (1)

Razdalja (km)	Kopno	Hladno morje	Toplo morje	Razdalja (km)	Kopno	Hladno morje	Toplo morje	Razdalja (km)	Kopno	Hladno morje	Toplo morje	Razdalja (km)	Kopno	Hladno morje	Toplo morje	Razdalja (km)	Kopno	Hladno morje	Toplo morje
0	70,4	70,4	70,4	60	18,4	28,5	28,5	120	3,6	9,7	9,7	180	-6,0	-0,6	-0,6	240	-13,1	-8,0	-8,0
2	56,4	57,8	57,8	62	17,8	27,6	27,6	122	3,2	9,3	9,3	182	-6,3	-0,9	-0,9	242	-13,4	-8,2	-8,2
4	53,6	56,6	56,6	64	17,2	26,8	26,8	124	2,8	8,8	8,8	184	-6,5	-1,1	-1,1	244	-13,6	-8,5	-8,5
6	50,8	55,5	55,5	66	16,7	26,0	26,0	126	2,4	8,4	8,4	186	-6,8	-1,4	-1,4	246	-13,8	-8,7	-8,7
8	48,2	54,4	54,4	68	16,1	25,2	25,2	128	2,0	8,0	8,0	188	-7,0	-1,6	-1,6	248	-14,1	-9,0	-9,0
10	45,8	53,4	53,4	70	15,6	24,4	24,4	130	1,7	7,5	7,5	190	-7,2	-1,9	-1,9	250	-14,3	-9,2	-9,2
12	43,6	52,3	52,3	72	15,0	23,6	23,6	132	1,3	7,1	7,1	192	-7,5	-2,1	-2,1	252	-14,6	-9,5	-9,5
14	41,7	51,3	51,3	74	14,4	22,8	22,8	134	0,9	6,8	6,8	194	-7,7	-2,4	-2,4	254	-14,8	-9,7	-9,7
16	39,9	50,3	50,3	76	13,9	22,0	22,0	136	0,6	6,4	6,4	196	-8,0	-2,6	-2,6	256	-15,0	-9,9	-9,9
18	38,3	49,1	49,1	78	13,4	21,3	21,3	138	0,3	6,0	6,0	198	-8,2	-2,9	-2,9	258	-15,3	-10,2	-10,2
20	36,8	48,1	48,1	80	12,8	20,6	20,6	140	-0,1	5,7	5,7	200	-8,4	-3,1	-3,1	260	-15,5	-10,4	-10,4
22	35,4	47,0	47,0	82	12,3	19,9	19,9	142	-0,4	5,3	5,3	202	-8,7	-3,3	-3,3	262	-15,7	-10,7	-10,7
24	34,1	45,9	45,9	84	11,8	19,3	19,3	144	-0,7	5,0	5,0	204	-8,9	-3,6	-3,6	264	-16,0	-10,9	-10,9
26	32,8	44,9	44,9	86	11,3	18,7	18,7	146	-1,1	4,6	4,6	206	-9,1	-3,8	-3,8	266	-16,2	-11,2	-11,2
28	31,7	43,8	43,8	88	10,7	18,0	18,0	148	-1,4	4,3	4,3	208	-9,4	-4,1	-4,1	268	-16,4	-11,4	-11,4
30	30,6	42,9	42,9	90	10,2	17,4	17,4	150	-1,7	3,9	3,9	210	-9,6	-4,3	-4,3	270	-16,7	-11,7	-11,7
32	29,5	41,8	41,8	92	9,7	16,8	16,8	152	-2,0	3,6	3,6	212	-9,8	-4,6	-4,6	272	-16,9	-11,9	-11,9
34	28,4	40,7	40,7	94	9,3	16,3	16,3	154	-2,3	3,3	3,3	214	-10,1	-4,8	-4,8	274	-17,1	-12,1	-12,1
36	27,4	39,7	39,7	96	8,8	15,7	15,7	156	-2,6	3,0	3,0	216	-10,3	-5,1	-5,1	276	-17,4	-12,4	-12,4
38	26,5	38,7	38,7	98	8,3	15,1	15,1	158	-2,9	2,7	2,7	218	-10,5	-5,3	-5,3	278	-17,6	-12,6	-12,6
40	25,5	37,7	37,7	100	7,8	14,6	14,6	160	-3,2	2,3	2,3	220	-10,8	-5,5	-5,5	280	-17,8	-12,9	-12,9
42	24,7	36,7	36,7	102	7,4	14,1	14,1	162	-3,5	2,0	2,0	222	-11,0	-5,8	-5,8	282	-18,1	-13,1	-13,1
44	23,9	35,8	35,8	104	6,9	13,6	13,6	164	-3,8	1,7	1,7	224	-11,3	-6,0	-6,0	284	-18,3	-13,4	-13,4
46	23,1	34,9	34,9	106	6,5	13,1	13,1	166	-4,1	1,4	1,4	226	-11,5	-6,3	-6,3	286	-18,5	-13,6	-13,6
48	22,4	33,9	33,9	108	6,0	12,6	12,6	168	-4,4	1,1	1,1	228	-11,7	-6,5	-6,5	288	-18,7	-13,9	-13,9
50	21,7	33,0	33,0	110	5,6	12,1	12,1	170	-4,7	0,8	0,8	230	-12,0	-6,8	-6,8	290	-19,0	-14,1	-14,1
52	21,0	32,1	32,1	112	5,2	11,6	11,6	172	-4,9	0,5	0,5	232	-12,2	-7,0	-7,0	292	-19,2	-14,4	-14,4
54	20,3	31,1	31,1	114	4,8	11,1	11,1	174	-5,2	0,2	0,2	234	-12,4	-7,3	-7,3	294	-19,4	-14,6	-14,6
56	19,6	30,3	30,3	116	4,4	10,6	10,6	176	-5,5	-0,1	-0,1	236	-12,7	-7,5	-7,5	296	-19,6	-14,9	-14,9
58	19,0	29,3	29,3	118	4,0	10,2	10,2	178	-5,8	-0,3	-0,3	238	-12,9	-7,7	-7,7	298	-19,9	-15,1	-15,1

Razpredelnica 7a: Razpredelnične vrednosti za potencial motenja referenčnega omrežja 3 za 50 % časa – (2)

Razdalja (km)	Kopno	Hladno morje	Toplo morje	Razdalja (km)	Kopno	Hladno morje	Toplo morje	Razdalja (km)	Kopno	Hladno morje	Toplo morje	Razdalja (km)	Kopno	Hladno morje	Toplo morje	Razdalja (km)	Kopno	Hladno morje	Toplo morje
300	-20,1	-15,4	-15,4	360	-26,5	-22,1	-22,1	420	-32,4	-27,7	-27,7	480	-38,2	-33,2	-33,2	540	-43,7	-38,5	-38,5
302	-20,3	-15,6	-15,6	362	-26,7	-22,3	-22,3	422	-32,6	-27,9	-27,9	482	-38,4	-33,4	-33,4	542	-43,9	-38,7	-38,7
304	-20,5	-15,9	-15,9	364	-26,9	-22,5	-22,5	424	-32,8	-28,1	-28,1	484	-38,6	-33,6	-33,6	544	-44,1	-38,9	-38,9
306	-20,7	-16,1	-16,1	366	-27,1	-22,7	-22,7	426	-33,0	-28,3	-28,3	486	-38,8	-33,8	-33,8	546	-44,2	-39,0	-39,0
308	-21,0	-16,4	-16,4	368	-27,3	-22,9	-22,9	428	-33,2	-28,5	-28,5	488	-38,9	-33,9	-33,9	548	-44,4	-39,2	-39,2
310	-21,2	-16,6	-16,6	370	-27,5	-23,1	-23,1	430	-33,4	-28,6	-28,6	490	-39,1	-34,1	-34,1	550	-44,6	-39,4	-39,4
312	-21,4	-16,9	-16,9	372	-27,7	-23,3	-23,3	432	-33,6	-28,8	-28,8	492	-39,3	-34,3	-34,3	552	-44,8	-39,6	-39,6
314	-21,6	-17,1	-17,1	374	-27,9	-23,5	-23,5	434	-33,8	-29,0	-29,0	494	-39,5	-34,5	-34,5	554	-45,0	-39,7	-39,7
316	-21,8	-17,4	-17,4	376	-28,2	-23,7	-23,7	436	-34,0	-29,2	-29,2	496	-39,7	-34,6	-34,6	556	-45,2	-39,9	-39,9
318	-22,1	-17,7	-17,7	378	-28,4	-23,9	-23,9	438	-34,2	-29,4	-29,4	498	-39,9	-34,8	-34,8	558	-45,3	-40,1	-40,1
320	-22,3	-17,9	-17,9	380	-28,6	-24,1	-24,1	440	-34,4	-29,6	-29,6	500	-40,0	-35,0	-35,0	560	-45,5	-40,3	-40,3
322	-22,5	-18,2	-18,2	382	-28,8	-24,2	-24,2	442	-34,5	-29,7	-29,7	502	-40,2	-35,2	-35,2	562	-45,7	-40,4	-40,4
324	-22,7	-18,4	-18,4	384	-29,0	-24,4	-24,4	444	-34,7	-29,9	-29,9	504	-40,4	-35,3	-35,3	564	-45,9	-40,6	-40,6
326	-23,0	-18,7	-18,7	386	-29,2	-24,6	-24,6	446	-34,9	-30,1	-30,1	506	-40,6	-35,5	-35,5	566	-46,1	-40,8	-40,8
328	-23,2	-18,9	-18,9	388	-29,3	-24,8	-24,8	448	-35,1	-30,3	-30,3	508	-40,8	-35,7	-35,7	568	-46,3	-41,0	-41,0
330	-23,4	-19,2	-19,2	390	-29,5	-25,0	-25,0	450	-35,3	-30,5	-30,5	510	-41,0	-35,9	-35,9	570	-46,4	-41,1	-41,1
332	-23,6	-19,4	-19,4	392	-29,7	-25,2	-25,2	452	-35,5	-30,7	-30,7	512	-41,1	-36,1	-36,1	572	-46,6	-41,3	-41,3
334	-23,8	-19,6	-19,6	394	-29,9	-25,3	-25,3	454	-35,7	-30,8	-30,8	514	-41,3	-36,2	-36,2	574	-46,8	-41,5	-41,5
336	-24,0	-19,8	-19,8	396	-30,1	-25,5	-25,5	456	-35,9	-31,0	-31,0	516	-41,5	-36,4	-36,4	576	-47,0	-41,7	-41,7
338	-24,2	-20,0	-20,0	398	-30,3	-25,7	-25,7	458	-36,1	-31,2	-31,2	518	-41,7	-36,6	-36,6	578	-47,2	-41,8	-41,8
340	-24,4	-20,2	-20,2	400	-30,5	-25,9	-25,9	460	-36,3	-31,4	-31,4	520	-41,9	-36,8	-36,8	580	-47,4	-42,0	-42,0
342	-24,6	-20,4	-20,4	402	-30,7	-26,1	-26,1	462	-36,5	-31,6	-31,6	522	-42,1	-36,9	-36,9	582	-47,5	-42,2	-42,2
344	-24,9	-20,6	-20,6	404	-30,9	-26,3	-26,3	464	-36,7	-31,8	-31,8	524	-42,2	-37,1	-37,1	584	-47,7	-42,4	-42,4
346	-25,1	-20,8	-20,8	406	-31,1	-26,4	-26,4	466	-36,9	-32,0	-32,0	526	-42,4	-37,3	-37,3	586	-47,9	-42,5	-42,5
348	-25,3	-21,0	-21,0	408	-31,3	-26,6	-26,6	468	-37,0	-32,1	-32,1	528	-42,6	-37,5	-37,5	588	-48,0	-42,7	-42,7
350	-25,5	-21,2	-21,2	410	-31,5	-26,8	-26,8	470	-37,2	-32,3	-32,3	530	-42,8	-37,6	-37,6	590	-48,2	-42,9	-42,9
352	-25,7	-21,4	-21,4	412	-31,7	-27,0	-27,0	472	-37,4	-32,5	-32,5	532	-43,0	-37,8	-37,8	592	-48,4	-43,0	-43,0
354	-25,9	-21,5	-21,5	414	-31,9	-27,2	-27,2	474	-37,6	-32,7	-32,7	534	-43,1	-38,0	-38,0	594	-48,5	-43,2	-43,2
356	-26,1	-21,7	-21,7	416	-32,0	-27,4	-27,4	476	-37,8	-32,9	-32,9	536	-43,3	-38,2	-38,2	596	-48,7	-43,4	-43,4
358	-26,3	-21,9	-21,9	418	-32,2	-27,5	-27,5	478	-38,0	-33,1	-33,1	538	-43,5	-38,3	-38,3	598	-48,9	-43,5	-43,5
																600	-49,0	-43,7	-43,7

Potencial motenja referenčnega omrežja 3 za 1 % časa

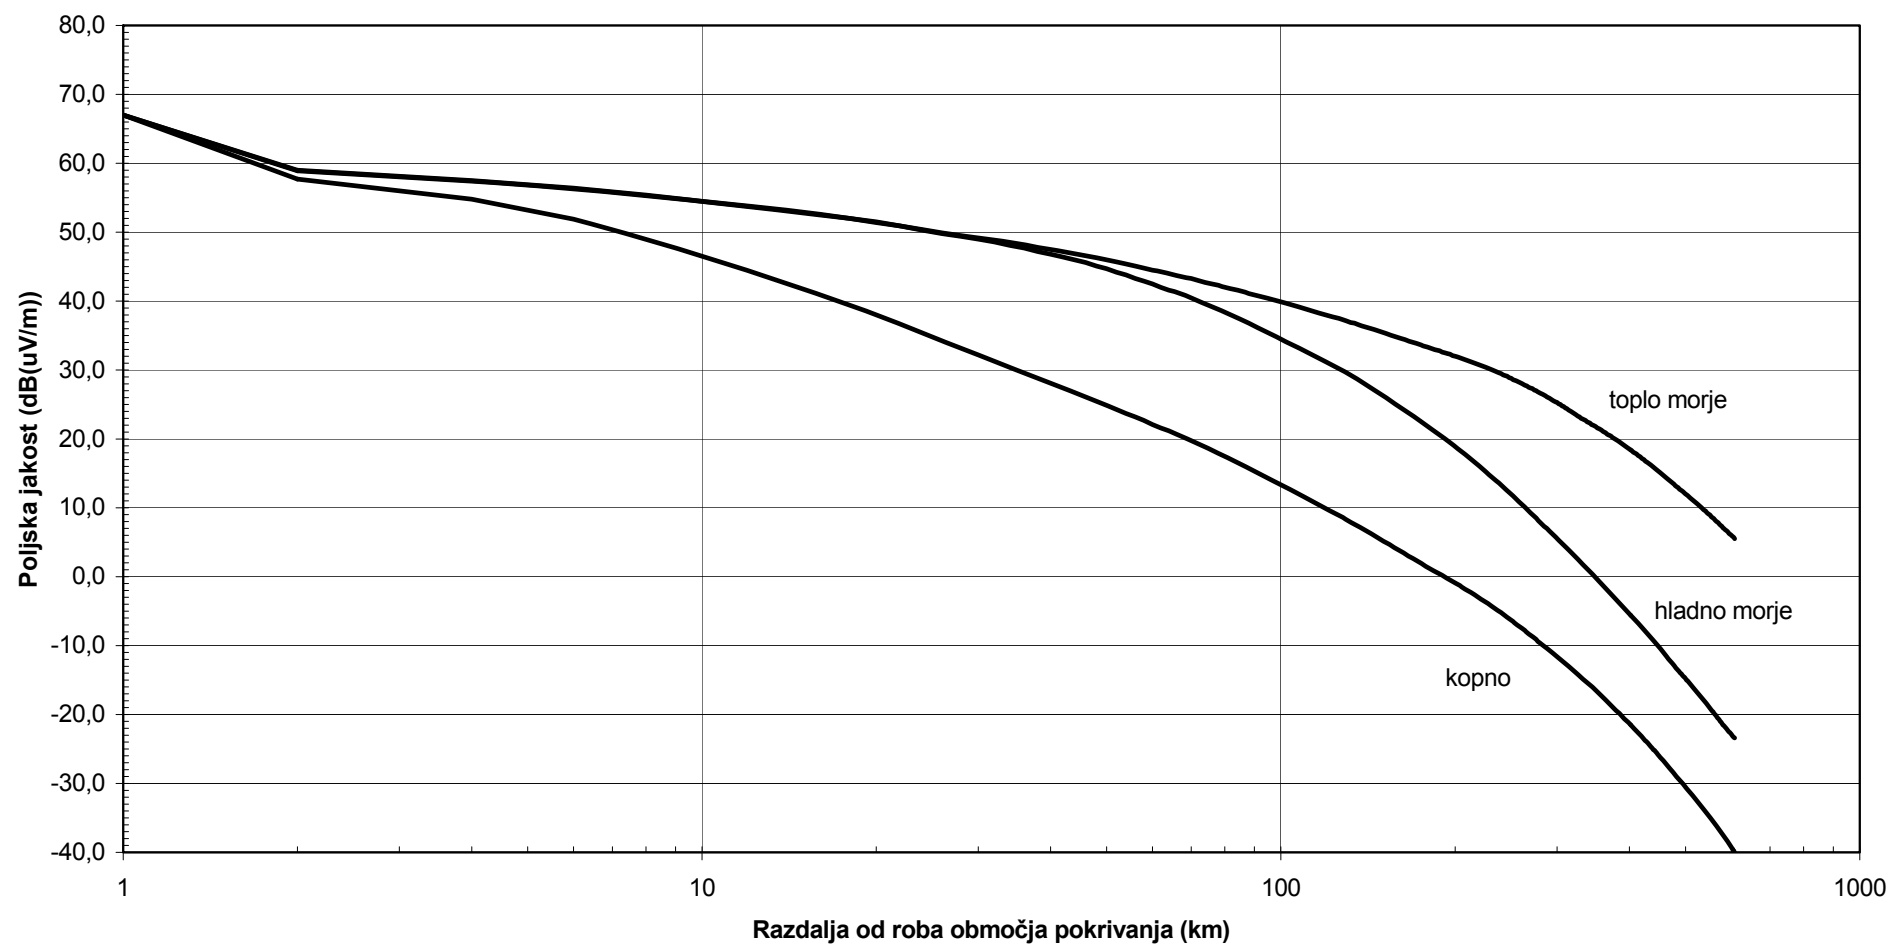

Slika 8b: Potencial motenja referenčnega omrežja tri za 1 % časa

Razpredelnica 7b: Razpredelnične vrednosti za potencial motenja referenčnega omrežja 3 za 1 % časa – (1)

Razdalja (km)	Kopno	Hladno morje	Toplo morje	Razdalja (km)	Kopno	Hladno morje	Toplo morje	Razdalja (km)	Kopno	Hladno morje	Toplo morje	Razdalja (km)	Kopno	Hladno morje	Toplo morje	Razdalja (km)	Kopno	Hladno morje	Toplo morje
0	74,4	74,4	74,4	60	27,8	53,5	53,8	120	16,7	52,5	52,9	180	9,2	50,5	51,5	240	2,9	46,6	49,0
2	60,6	60,9	61,0	62	27,3	53,4	53,7	122	16,4	52,4	52,9	182	9,0	50,5	51,5	242	2,7	46,4	48,9
4	58,1	59,2	59,4	64	26,8	53,4	53,7	124	16,1	52,4	52,8	184	8,8	50,4	51,4	244	2,5	46,2	48,8
6	55,6	58,1	58,2	66	26,3	53,4	53,7	126	15,9	52,4	52,8	186	8,6	50,3	51,4	246	2,3	46,0	48,7
8	53,2	57,2	57,3	68	25,9	53,4	53,7	128	15,6	52,3	52,8	188	8,4	50,2	51,3	248	2,1	45,8	48,6
10	51,0	56,5	56,6	70	25,4	53,3	53,6	130	15,3	52,3	52,7	190	8,1	50,1	51,2	250	1,9	45,6	48,5
12	49,1	56,0	56,0	72	25,0	53,3	53,6	132	15,1	52,2	52,7	192	7,9	50,0	51,2	252	1,7	45,3	48,4
14	47,3	55,6	55,6	74	24,5	53,3	53,5	134	14,8	52,2	52,6	194	7,7	49,9	51,1	254	1,5	45,1	48,3
16	45,7	55,2	55,3	76	24,0	53,2	53,5	136	14,5	52,1	52,6	196	7,5	49,8	51,1	256	1,3	44,9	48,2
18	44,3	55,0	55,1	78	23,6	53,2	53,5	138	14,2	52,0	52,5	198	7,3	49,7	51,0	258	1,1	44,7	48,1
20	43,0	54,7	54,9	80	23,2	53,2	53,5	140	14,0	52,0	52,5	200	7,1	49,6	50,9	260	0,9	44,4	48,0
22	41,7	54,5	54,7	82	22,8	53,1	53,5	142	13,7	51,9	52,4	202	6,9	49,4	50,8	262	0,7	44,2	47,9
24	40,6	54,3	54,4	84	22,4	53,1	53,4	144	13,5	51,8	52,4	204	6,7	49,3	50,7	264	0,4	44,0	47,8
26	39,5	54,1	54,3	86	22,0	53,1	53,4	146	13,2	51,8	52,3	206	6,4	49,2	50,6	266	0,2	43,7	47,7
28	38,6	53,9	54,2	88	21,7	53,0	53,4	148	12,9	51,7	52,3	208	6,2	49,0	50,5	268	0,0	43,5	47,6
30	37,7	53,8	54,1	90	21,3	53,0	53,4	150	12,7	51,6	52,2	210	6,0	48,9	50,4	270	-0,2	43,3	47,4
32	36,8	53,7	54,1	92	21,0	53,0	53,4	152	12,4	51,5	52,2	212	5,8	48,8	50,4	272	-0,4	43,0	47,3
34	36,0	53,7	54,0	94	20,6	53,0	53,4	154	12,2	51,4	52,1	214	5,6	48,6	50,3	274	-0,6	42,8	47,2
36	35,2	53,7	54,0	96	20,3	52,9	53,3	156	11,9	51,4	52,1	216	5,4	48,5	50,2	276	-0,8	42,6	47,1
38	34,4	53,6	54,0	98	19,9	52,9	53,3	158	11,7	51,3	52,0	218	5,2	48,4	50,1	278	-1,0	42,3	47,0
40	33,7	53,6	54,0	100	19,6	52,8	53,3	160	11,5	51,2	52,0	220	4,9	48,2	50,0	280	-1,2	42,1	46,9
42	33,0	53,6	54,0	102	19,3	52,8	53,2	162	11,2	51,1	51,9	222	4,7	48,1	49,9	282	-1,4	41,9	46,8
44	32,4	53,6	54,0	104	19,0	52,8	53,2	164	11,0	51,0	51,8	224	4,5	48,0	49,8	284	-1,5	41,7	46,7
46	31,8	53,6	54,0	106	18,7	52,7	53,2	166	10,8	51,0	51,8	226	4,3	47,8	49,7	286	-1,7	41,5	46,6
48	31,2	53,5	53,9	108	18,4	52,7	53,1	168	10,5	50,9	51,7	228	4,1	47,7	49,6	288	-1,9	41,4	46,5
50	30,6	53,5	53,9	110	18,1	52,7	53,1	170	10,3	50,8	51,7	230	3,9	47,5	49,5	290	-2,1	41,2	46,3
52	30,0	53,5	53,9	112	17,8	52,6	53,0	172	10,1	50,7	51,6	232	3,7	47,4	49,4	292	-2,3	41,0	46,2
54	29,4	53,5	53,9	114	17,5	52,6	53,0	174	9,9	50,7	51,6	234	3,5	47,2	49,3	294	-2,5	40,8	46,1
56	28,8	53,5	53,8	116	17,2	52,5	53,0	176	9,7	50,6	51,6	236	3,3	47,0	49,2	296	-2,7	40,6	46,0
58	28,3	53,5	53,8	118	16,9	52,5	52,9	178	9,4	50,6	51,5	238	3,1	46,8	49,1	298	-2,9	40,4	45,9

Razpredelnica 7b: Razpredelnične vrednosti za potencial motenja referenčnega omrežja 3 za 1% časa – (2)

Razdalja (km)	Kopno	Hladno morje	Toplo morje	Razdalja (km)	Kopno	Hladno morje	Toplo morje	Razdalja (km)	Kopno	Hladno morje	Toplo morje	Razdalja (km)	Kopno	Hladno morje	Toplo morje	Razdalja (km)	Kopno	Hladno morje	Toplo morje
300	-3,0	40,3	45,8	360	-8,5	35,4	42,4	420	-13,7	31,3	39,5	480	-18,9	27,2	36,5	540	-23,8	23,7	33,8
302	-3,2	40,1	45,6	362	-8,6	35,3	42,3	422	-13,8	31,2	39,4	482	-19,1	27,1	36,4	542	-24,0	23,6	33,7
304	-3,4	39,9	45,5	364	-8,8	35,2	42,2	424	-14,0	31,0	39,3	484	-19,3	27,0	36,3	544	-24,1	23,4	33,6
306	-3,6	39,7	45,4	366	-9,0	35,0	42,1	426	-14,2	30,9	39,2	486	-19,4	26,9	36,2	546	-24,3	23,3	33,5
308	-3,8	39,6	45,3	368	-9,1	34,9	42,0	428	-14,4	30,8	39,1	488	-19,6	26,7	36,1	548	-24,5	23,2	33,4
310	-4,0	39,4	45,2	370	-9,3	34,7	41,9	430	-14,5	30,6	39,0	490	-19,7	26,6	36,0	550	-24,6	23,1	33,3
312	-4,2	39,2	45,1	372	-9,5	34,6	41,8	432	-14,7	30,5	38,9	492	-19,9	26,5	35,9	552	-24,8	23,0	33,2
314	-4,4	39,1	44,9	374	-9,7	34,4	41,7	434	-14,9	30,4	38,8	494	-20,1	26,4	35,8	554	-25,0	22,8	33,1
316	-4,6	38,9	44,8	376	-9,8	34,3	41,6	436	-15,1	30,2	38,7	496	-20,2	26,3	35,7	556	-25,1	22,7	33,1
318	-4,7	38,7	44,7	378	-10,0	34,1	41,5	438	-15,2	30,1	38,6	498	-20,4	26,1	35,6	558	-25,3	22,6	33,0
320	-4,9	38,5	44,6	380	-10,2	34,0	41,4	440	-15,4	30,0	38,5	500	-20,6	26,0	35,6	560	-25,4	22,5	32,9
322	-5,1	38,4	44,5	382	-10,3	33,8	41,3	442	-15,6	29,8	38,4	502	-20,7	25,9	35,5	562	-25,6	22,4	32,8
324	-5,3	38,2	44,3	384	-10,5	33,7	41,2	444	-15,8	29,7	38,3	504	-20,9	25,8	35,4	564	-25,8	22,2	32,7
326	-5,5	38,0	44,2	386	-10,7	33,6	41,1	446	-15,9	29,5	38,2	506	-21,0	25,7	35,3	566	-25,9	22,1	32,6
328	-5,7	37,8	44,1	388	-10,9	33,4	41,0	448	-16,1	29,4	38,1	508	-21,2	25,6	35,2	568	-26,1	22,0	32,5
330	-5,9	37,7	44,0	390	-11,0	33,3	40,9	450	-16,3	29,3	38,0	510	-21,4	25,4	35,1	570	-26,3	21,9	32,4
332	-6,0	37,5	43,9	392	-11,2	33,2	40,8	452	-16,5	29,1	37,9	512	-21,5	25,3	35,0	572	-26,4	21,8	32,3
334	-6,2	37,4	43,8	394	-11,4	33,0	40,7	454	-16,6	29,0	37,8	514	-21,7	25,2	34,9	574	-26,6	21,6	32,2
336	-6,4	37,2	43,7	396	-11,6	32,9	40,6	456	-16,8	28,9	37,7	516	-21,9	25,1	34,9	576	-26,7	21,5	32,1
338	-6,6	37,1	43,6	398	-11,7	32,8	40,5	458	-17,0	28,7	37,6	518	-22,0	25,0	34,8	578	-26,9	21,4	32,1
340	-6,7	36,9	43,4	400	-11,9	32,6	40,4	460	-17,2	28,6	37,5	520	-22,2	24,9	34,7	580	-27,1	21,3	32,0
342	-6,9	36,8	43,3	402	-12,1	32,5	40,3	462	-17,3	28,5	37,4	522	-22,4	24,7	34,6	582	-27,2	21,2	31,9
344	-7,1	36,6	43,2	404	-12,3	32,4	40,2	464	-17,5	28,3	37,3	524	-22,5	24,6	34,5	584	-27,4	21,1	31,8
346	-7,3	36,5	43,1	406	-12,4	32,2	40,1	466	-17,7	28,2	37,2	526	-22,7	24,5	34,4	586	-27,6	21,0	31,7
348	-7,4	36,3	43,0	408	-12,6	32,1	40,0	468	-17,9	28,0	37,1	528	-22,8	24,4	34,3	588	-27,7	20,8	31,6
350	-7,6	36,2	42,9	410	-12,8	32,0	39,9	470	-18,0	27,9	37,0	530	-23,0	24,3	34,2	590	-27,9	20,7	31,5
352	-7,8	36,0	42,8	412	-13,0	31,8	39,8	472	-18,2	27,8	36,9	532	-23,2	24,1	34,1	592	-28,1	20,6	31,4
354	-7,9	35,9	42,7	414	-13,1	31,7	39,7	474	-18,4	27,6	36,8	534	-23,3	24,0	34,0	594	-28,3	20,5	31,3
356	-8,1	35,7	42,6	416	-13,3	31,6	39,7	476	-18,6	27,5	36,7	536	-23,5	23,9	34,0	596	-28,4	20,4	31,3
358	-8,3	35,6	42,5	418	-13,5	31,4	39,6	478	-18,7	27,4	36,6	538	-23,7	23,8	33,9	598	-28,6	20,3	31,2
																600	-28,8	20,2	31,1

Dodatek

KRIVULJE RAZŠIRJANJA ZA RADIOFREKVENČNI PAS 1,5 GHz

(ekstrapolirano iz prejšnjega Priporočila ITU-R P.370-7)

1 Uvod

1.1 Krivulje razširjanja kažejo vrednosti poljske jakosti v pasu 1,5 GHz kot funkcijo različnih parametrov; ene krivulje se nanašajo na razširjanje po kopenskih območjih, druge po morskih. Kopenske krivulje so izdelane na podlagi podatkov, pridobljenih v zmernih podnebnih razmerah Evrope in Severne Amerike. Morske krivulje pa so izdelane na podlagi podatkov, pridobljenih predvsem na območjih Sredozemlja in Severnega morja.

1.2 Krivulje razširjanja kažejo vrednosti poljske jakosti, ki so presežene na 50 % lokacij (na vsakem območju velikosti približno 200 m x 200 m) za različne časovne odstotke. Ustrezajo različnim višinam oddajnih anten in višini 10 m sprejemne antene. Kopenske krivulje se nanašajo na vrednost $\Delta h = 50$ m, ki v splošnem velja za valovit teren, tipičen za Evropo in Severno Ameriko.

1.3 Krivulje na slikah 1 a, 1 b, 2 a, 2 b, 3 a in 3 b veljajo za efektivne višine oddajne antene med 37,5 m in 1200 m, pri čemer je vsaka vrednost "efektivne višine" dvakratnik predhodne vrednosti. Za druge vrednosti efektivne višine se uporabi linearna interpolacija med krivuljama, ki ustrezata efektivnim višinama neposredno pod in nad dejansko vrednostjo.

1.3.1 Pri efektivni višini oddajne antene h_1 v območju od 0 do 37,5 m se za poljsko jakost na razdalji x od oddajnika šteje, da jo podaja krivulja za 37,5 m na razdalji $(x + 25 - 4,1\sqrt{h_1})$ km. Ta postopek velja za razdalje onstran radijskega obzorja, danega z vrednostjo $(4,1\sqrt{h_1})$ km. Vrednosti poljske jakosti za krajše razdalje se izračunajo z:

- računanjem razlike med vrednostjo poljske jakosti na radijskem obzorju za višino h_1 (z uporabo zgornjega postopka) in vrednostjo na krivulji za 37,5 m za isto razdaljo;
- odštevanjem absolutne vrednosti tako pridobljene razlike od vrednosti poljske jakosti na krivulji za 37,5 m za dejansko razdaljo.

Navedeno se lahko izrazi s spodnjima formulama, kjer je $E(x, h_1)$ poljska jakost v $\text{dB}(\mu\text{V/m})$ za razdaljo x (km) in efektivno višino oddajne antene h_1 (m):

$$E(x, h_1) = E[(x + 25 - 4,1\sqrt{h_1}), 37,5] \quad \text{za } x = (4,1\sqrt{h_1})$$

$$E(x, h_1) = E(x, 37,5) - E[4,1\sqrt{h_1}, 37,5] + E(25, 37,5) \quad \text{za } x < (4,1\sqrt{h_1})$$

1.3.2 Pri efektivni višini oddajne antene h_1 , večji od 1200 m, se za poljsko jakost na razdalji x od oddajnika šteje, da jo podaja krivulja za 1200 m na razdalji $(x + 142 - 4,1\sqrt{h_1})$ km. Ta postopek velja za razdalje onstran radijskega obzorja, danega z vrednostjo $(4,1\sqrt{h_1})$ km. Vrednosti poljske jakosti za krajše razdalje se izračunajo z:

- računanjem razlike med vrednostjo poljske jakosti na radijskem obzorju za višino h_1 (z uporabo zgornjega postopka) in vrednostjo na krivulji za 1200 m za isto razdaljo;
- prištevanjem absolutne vrednosti tako pridobljene razlike k vrednosti poljske jakosti na krivulji za 1200 m za dejansko razdaljo.

To se lahko izrazi takole:

$$E(x, h_1) = E[(x + 142 - 4,1\sqrt{h_1}), 1200] \quad \text{za } x = (4,1\sqrt{h_1})$$

$$E(x, h_1) = E(x, 1200) - E[4,1\sqrt{h_1}, 1200] + E(142, 1200) \quad \text{za } x < (4,1\sqrt{h_1})$$

Pri tem postopku se upošteva omejitev, da izračunana vrednost ne presega vrednosti v praznem prostoru.

1.4 Za lokacije z verjetnostmi, različnimi od 50 %, so korekcijske vrednosti navedene v razpredelnici 1. Korekcijske vrednosti so razmerja (dB) med poljsko jakostjo, potrebno za dano lokacijsko verjetnost, in poljsko jakostjo, potrebno za lokacijsko verjetnost 50 %.

1.5 Poljske jakosti za mešane poti razširjanja se ocenjujejo po metodah, opisanih v oddelku 4.

1.6 Krivulje na slikah 1 a, 1 b, 2 a, 2 b, 3 a in 3 b temeljijo na vrednostih iz daljših obdobj (nekaj let) in se lahko štejejo kot reprezentativne za povprečne podnebne razmere, ki prevladujejo na vseh temperaturnih območjih. Vseeno je treba opozoriti, da so v krajših obdobjih (npr. v nekaj urah ali celo dneh) mogoče poljske jakosti, ki močno presegajo vrednosti iz teh krivulj, zlasti na ravninskih predelih.

1.7 Znano je, da je srednja poljska jakost različna na različnih podnebnih območjih in podatki za veliko število takih podnebnih razmer v Severni Ameriki in Zahodni Evropi kažejo, da je mogoče soodvisno povezati opazovane vrednosti srednje poljske jakosti z gradientom lomnega količnika na prvem kilometru ozračja nad zemeljskimi tlemi. Če sta n_s in n_1 lomna količnika na površini oziroma na višini 1 km in če je razlika ΔN definirana kot $(n_s - n_1) \times 10^6$, potem se v standardnem ozračju pri $\Delta N = 40$ nanaša 50 % krivulj na ta primer. Če se srednja vrednost ΔN na danem območju občutno razlikuje od 40, se ustrezne srednje poljske jakosti za vse razdalje onstran obzorja dobijo tako, da se pri krivuljah uporabi korekcijski faktor 0,5 ($\Delta N - 40$) dB. Če vrednost ΔN ni znana, na voljo pa so podatki o srednji vrednosti N_s , pri čemer je $N_s = (n_s - 1) \times 10^6$, se lahko vsaj za zmerne podnebne razmere uporabi alternativni korekcijski faktor 0,2 ($N_s - 310$) dB. Čeprav so bili ti popravki narejeni le za prej omenjena geografska območja, se lahko uporabijo kot vodilo za popravke, ki bi lahko bili potrebni na drugih geografskih območjih. Obseg, do katerega je zanesljiva uporaba podobnih popravkov krivulj poljskih jakosti, ki presegajo čas za 1 % in 10 %, ni znan. Vsekakor se pričakuje, da bo potreben velik popravek za vrednosti 1 % in 10 % na območjih, na katerih prevladuje superlom v občutnem časovnem razdobju.

2 Krivulje razširjanja

2.1 Krivulje na slikah 1 a in 1 b prikazujejo vrednosti poljske jakosti, ki so presežene na 50 % lokacij na vsakem območju velikosti približno 200 m x 200 m ter za 50 % in 1 % časa za kopenske poti razširjanja, kjer se šteje, da je višinska razlika $\Delta h = 50$ m reprezentativna. Ekstrapolirane so z uporabo popravka krivulj UHF, ko so navedene v prejšnjem Priporočilu ITU-R P.370-7. Za vse časovne odstotke in antenske višine se poljska jakost računa po enačbi:

$$E_{1,5 \text{ GHz}} = E_{\text{UHF}} + 0,5 (E_{\text{UHF}} - E_{\text{VHF}})$$

2.2 Krivulje na slikah 2 a, 2 b, 3 a in 3 b prikazujejo vrednosti poljske jakosti, ki so presežene na 50 % lokacij ter za 50 % in 1 % časa za morske poti razširjanja nad hladnimi in toplimi morji, pri čemer so podnebne značilnosti teh območij približane značilnostim, opazovanim nad Severnim morjem oziroma Sredozemljem. Za vse časovne odstotke in antenske višine so bile uporabljene krivulje iz prejšnjega Priporočila ITU-R P.370-7 za UHF.

2.3 Na območjih, na katerih prihaja do izrazitih superlomnih pojavov, se upoštevajo podatki iz oddelka 1.7.

3 Lokacijska spremenljivost pri napovedovanju pokrivanja

Metode za napovedovanje območij pokrivanja naj zagotavljajo statistiko sprejemnih pogojev predvsem za določeno območje, ne pa za katerokoli posebno točko. Razlaga takih statističnih podatkov je odvisna od velikosti obravnavanega območja.

Če en terminal na radijski poti miruje in se drugi premika, se izguba na poti spreminja zvezno z lokacijo v skladu z vsemi vplivi, ki jo prizadevajo. Ti vplivi se delijo v tri glavne kategorije:

- *Večpotne spremembe*
Spreminjanje signala se pojavi pri razdaljah, približno enakih njegovi valovni dolžini, zaradi vektorskega seštevanja signalov kot posledica učinkovanja z več strani (poti), to je odbojev od tal, zgradb itd.
- *Krajevno spreminjanje zaradi prekrivanja tal*
Spreminjanje signala se pojavi, ko ga ovirajo talna prekritja v soseščini, npr. stavbe, drevje itd., na razdaljah, ki približno ustrezajo velikostim takih objektov. Velikost tega spreminjanja je navadno bistveno večja od večpotnih sprememb.

– *Potne spremembe*

Spreminjanje signala se pojavi tudi zaradi sprememb geometrije na celotni poti razširjanja, to je prisotnosti vzpetin itd. Velikost tega spreminjanja je razen pri zelo kratkih poteh navadno bistveno večja od krajevnega spreminjanja zaradi prekrivanja tal.

Pri načrtovanju območij pokrivanja se lokacijska spremenljivost navadno nanaša na prostorsko statistiko krajevnih sprememb zaradi prekrivanja tal s povprečnimi vrednostmi lokacijskega spreminjanja. Ta pristop je koristen pri razdaljah, ki so bistveno večje od razdalj, na katerih prihaja do spreminjanja zaradi prekrivanja tal in kjer potne spremembe še niso pomembne. To bi bil lahko nepraktičen pogoj za območje, na katerem se geometrija poti hitro spreminja, kot je npr. nagnjeno zemljišče.

Lokacijska spremenljivost se tipično navaja za območje reda velikosti kvadrata s stranicami 100–200 m, včasih z dodatno zahtevo, da je območje ravninsko. Pomembno pri tem je, ali geometrija poti bistveno vpliva na spreminjanje na obravnavanem območju.

4 Izračunavanje mešanih poti

Če pot vključuje cone z različnimi karakteristikami razširjanja, se uporabi naslednja metoda, pri kateri se upoštevajo različne karakteristike razširjanja na različnih delih poti:

- a) Za časovne odstotke $< 10\%$ se uporabi naslednji postopek izračunavanja poljske jakosti za poti, ki prečkajo mejo med kopnim in morjem:

$$E_{m,t} = E_{l,t} + A(E_{s,t} - E_{l,t})$$

kjer je:

$E_{m,t}$: poljska jakost za mešano pot za $t\%$ časa

$E_{l,t}$: poljska jakost za kopno pot, enako dolžini mešane poti, za $t\%$ časa

$E_{s,t}$: poljska jakost za morsko pot, enako dolžini mešane poti, za $t\%$ časa

A : interpolacijski faktor, podan na sliki 4.

Kadar pot prečka več kot dve coni (od katerih je vsaj ena morska), se uporabi linearni postopek pod b), najprej za odseke poti, ki prečkajo morske cone, nato za odseke, ki prečkajo kopenske cone. Nato se obe vrednosti poljske jakosti kombinirata z uporabo zgornjega nelinearnega postopka. Za vse druge primere se uporablja postopek pod b).

- b) Za časovne odstotke, enake 10% , se uporabi naslednji postopek:

$$E_{m,t} = \sum_i \frac{d_i}{d_T} E_{i,t}$$

kjer je:


$E_{m,t}$: poljska jakost za mešano pot za $t\%$ časa

$E_{i,t}$: poljska jakost za pot v coni i , po dolžini enaki dolžini mešane poti, za $t\%$ časa


d_i : dolžina poti v coni i in

d_T : dolžina celotne poti.


Slika 1a: Poljska jakost za 1 kW e.r.p. proti razdalji kot funkcija efektivne višine oddajne antene; KOPNO; 50 % časa

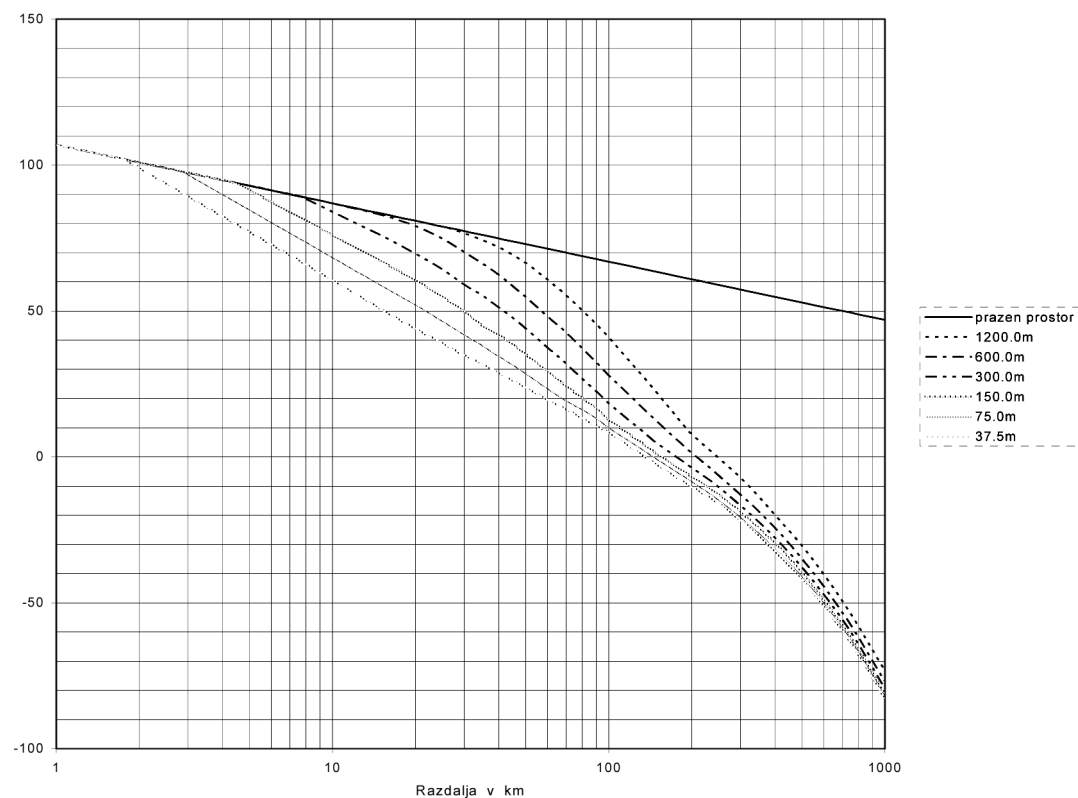


Slika 1b: Poljska jakost za 1 kW e.r.p. proti razdalji kot funkcija efektivne višine oddajne antene; KOPNO; 1 % časa

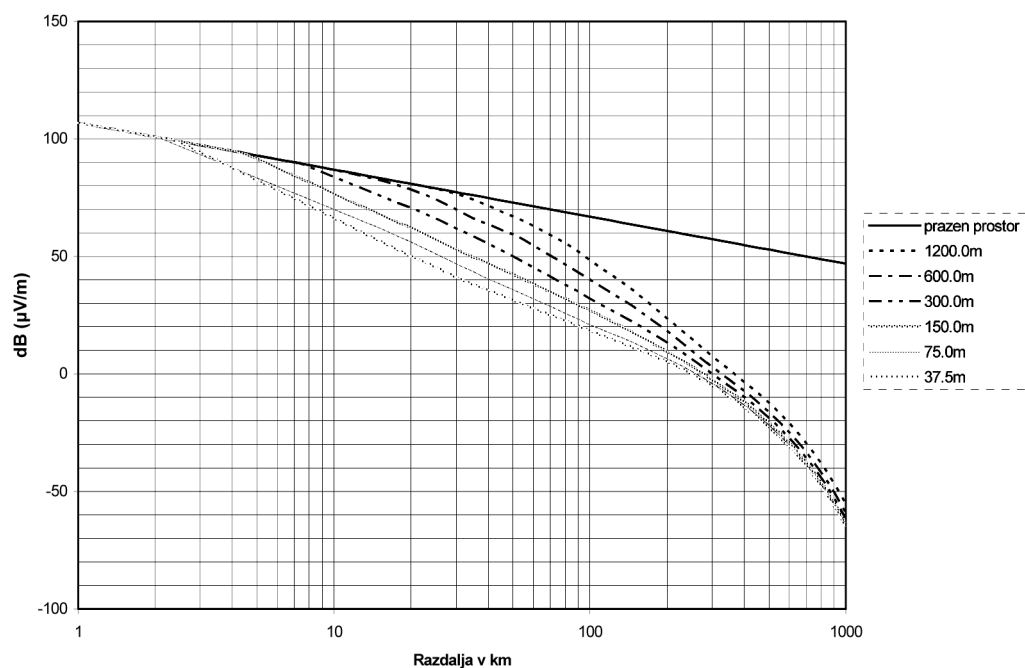


Slika 2a: Poljska jakost za 1 kW e.r.p. proti razdalji kot funkcija efektivne višine oddajne antene; HLADNO MORJE; 50 % časa

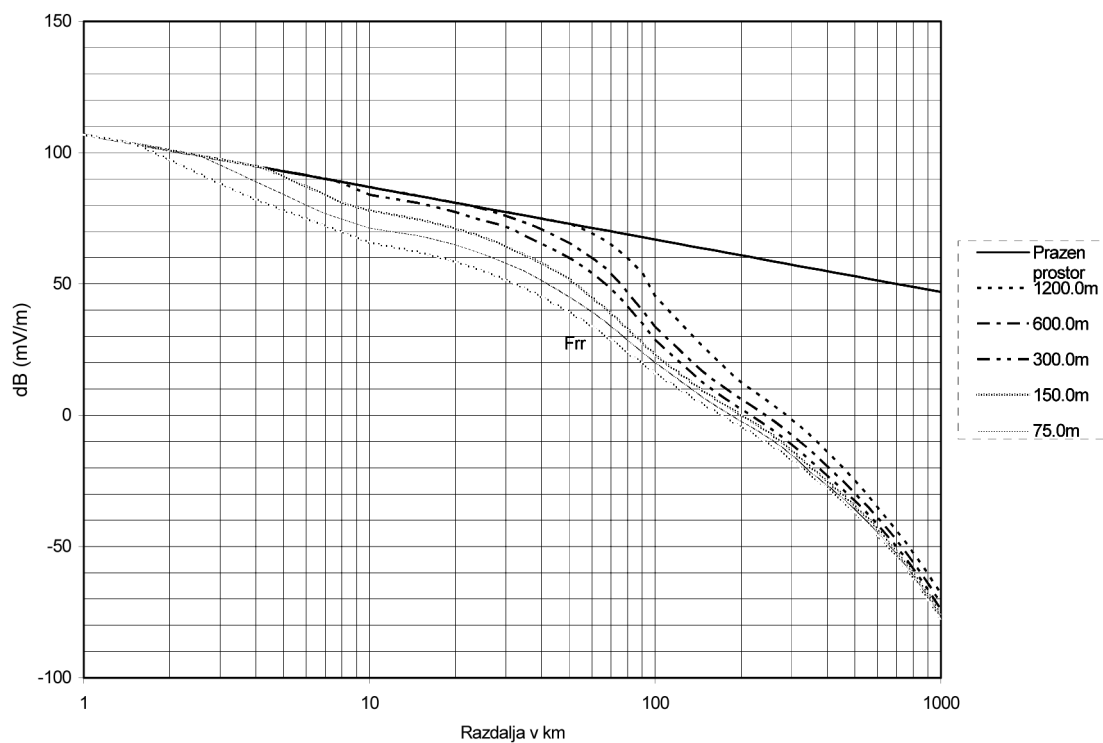


Slika 2b: Poljska jakost za 1 kW e.r.p. proti razdalji kot funkcija efektivne višine oddajne antene; HLADNO MORJE; 1 % časa

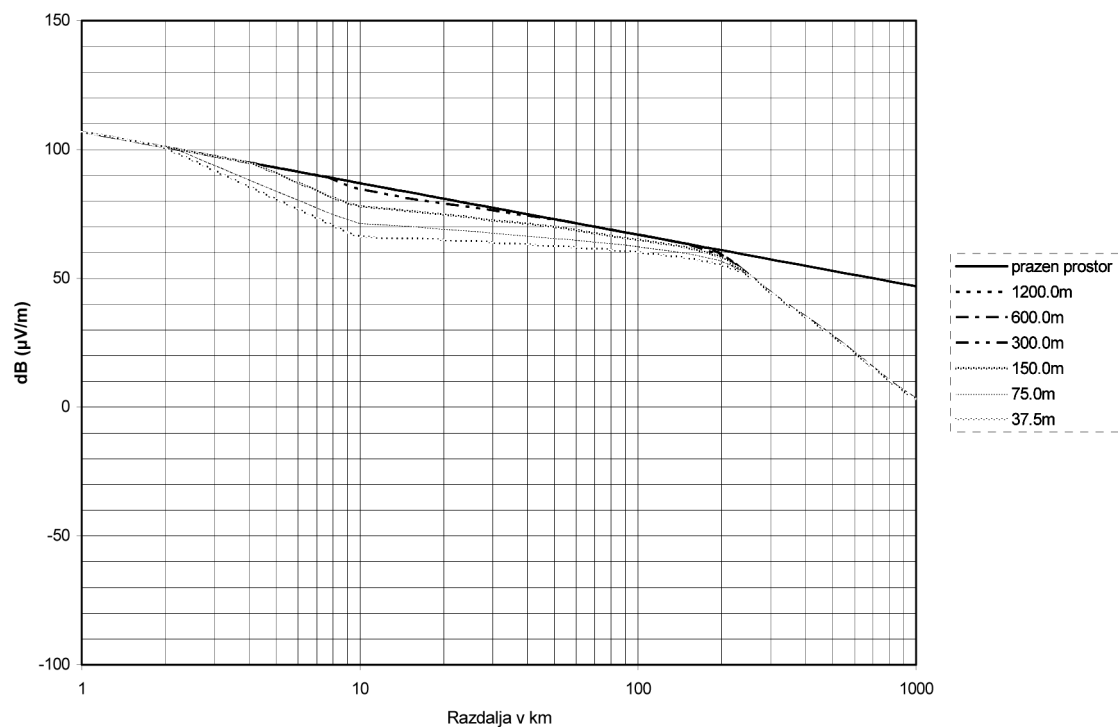

Slika 3a: Poljska jakost za 1 kW e.r.p. proti razdalji kot funkcija efektivne višine oddajne antene;
TOPLO MORJE; 50 % časa

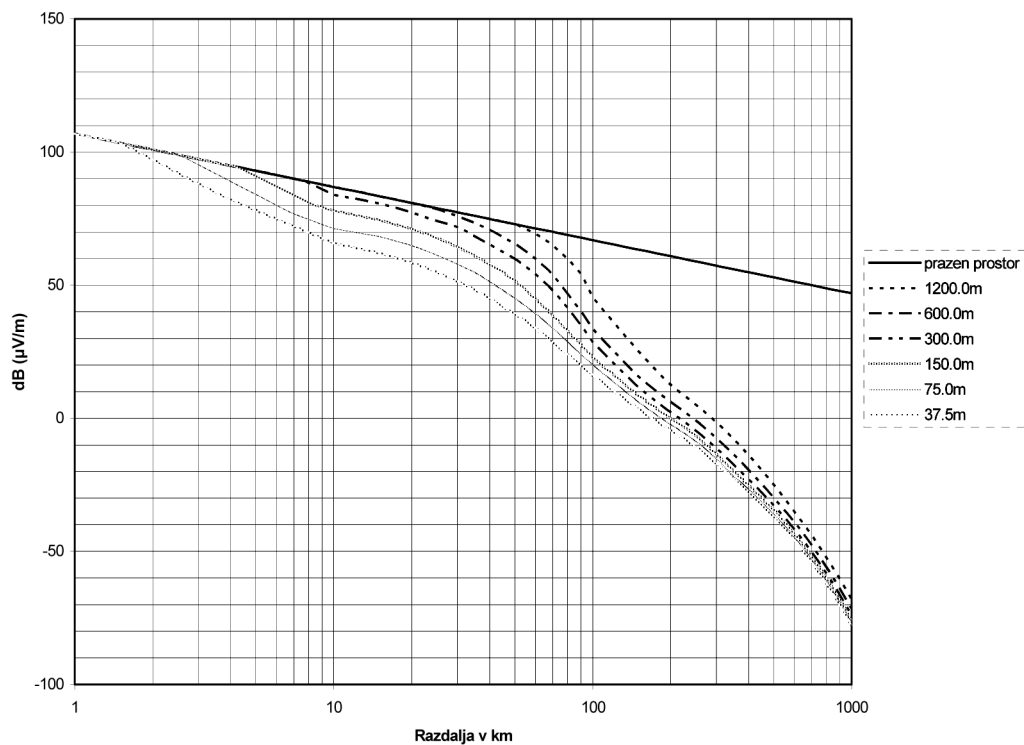

Slika 3b: Poljska jakost za 1 kW e.r.p. proti razdalji kot funkcija efektivne višine oddajne antene;
TOPLO MORJE; 1 % časa

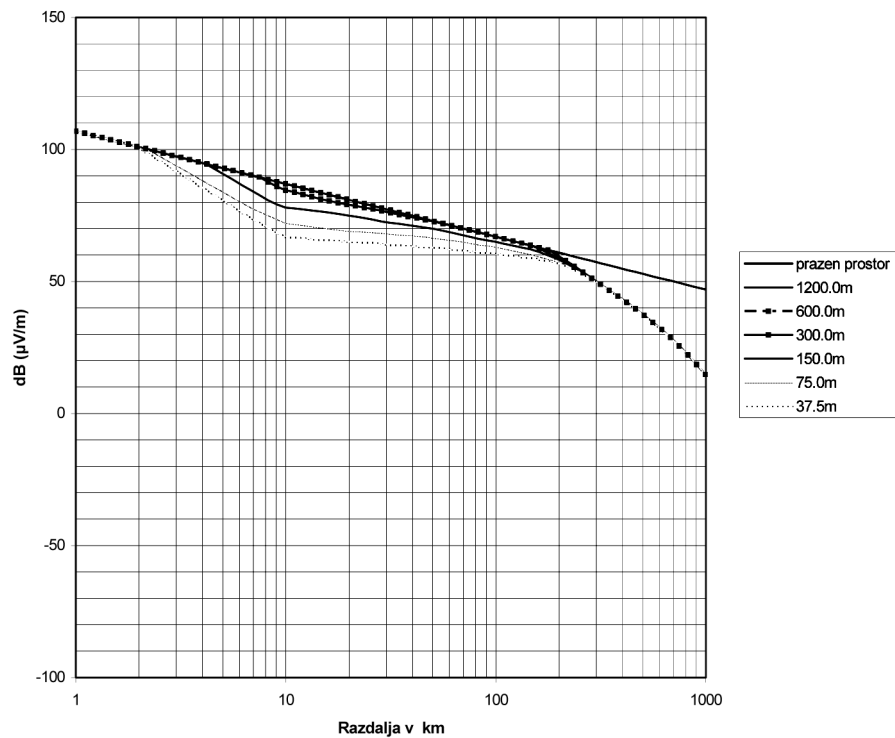


ODSTOTEK (sprejemnih lokacij)	RAZMERJE (dB) (poljskih jakosti)	ODSTOTEK (sprejemnih lokacij)	RAZMERJE (dB) (poljskih jakosti)	ODSTOTEK (sprejemnih lokacij)	RAZMERJE (dB) (poljskih jakosti)
1	12,797	34	2,266	67	-2,417
2	11,298	35	2,117	68	-2,570
3	10,347	36	1,969	69	-2,725
4	9,631	37	1,823	70	-2,882
5	9,049	38	1,678	71	-3,042
6	8,553	39	1,534	72	-3,204
7	8,118	40	1,391	73	-3,369
8	7,729	41	1,249	74	-3,537
9	7,375	42	1,108	75	-3,708
10	7,050	43	0,968	76	-3,883
11	6,747	44	0,829	77	-4,062
12	6,463	45	0,690	78	-4,246
13	6,196	46	0,551	79	-4,434
14	5,942	47	0,413	80	-4,628
15	5,700	48	0,275	81	-4,828
16	5,469	49	0,137	82	-5,034
17	5,248	50	0,000	83	-5,248
18	5,034	51	-0,137	84	-5,469
19	4,828	52	-0,275	85	-5,700
20	4,628	53	-0,413	86	-5,942
21	4,434	54	-0,551	87	-6,196
22	4,246	55	-0,690	88	-6,463
23	4,062	56	-0,829	89	-6,747
24	3,883	57	-0,968	90	-7,050
25	3,708	58	-1,108	91	-7,375
26	3,537	59	-1,249	92	-7,729
27	3,369	60	-1,391	93	-8,118
28	3,204	61	-1,534	94	-8,553
29	3,042	62	-1,678	95	-9,049
30	2,882	63	-1,823	96	-9,631
31	2,725	64	-1,969	97	-10,347
32	2,570	65	-2,117	98	-11,298
33	2,417	66	-2,266	99	-12,797

Razpredelnica 1

Razmerje (dB) med poljsko jakostjo za dani odstotek sprejemnih lokacij in poljsko jakostjo za 50 % sprejemnih lokacij (za digitalne sisteme, pasovna širina >1,5 MHz)

Slika 4
Interpolacija za mešane poti nad kopnim in morjem

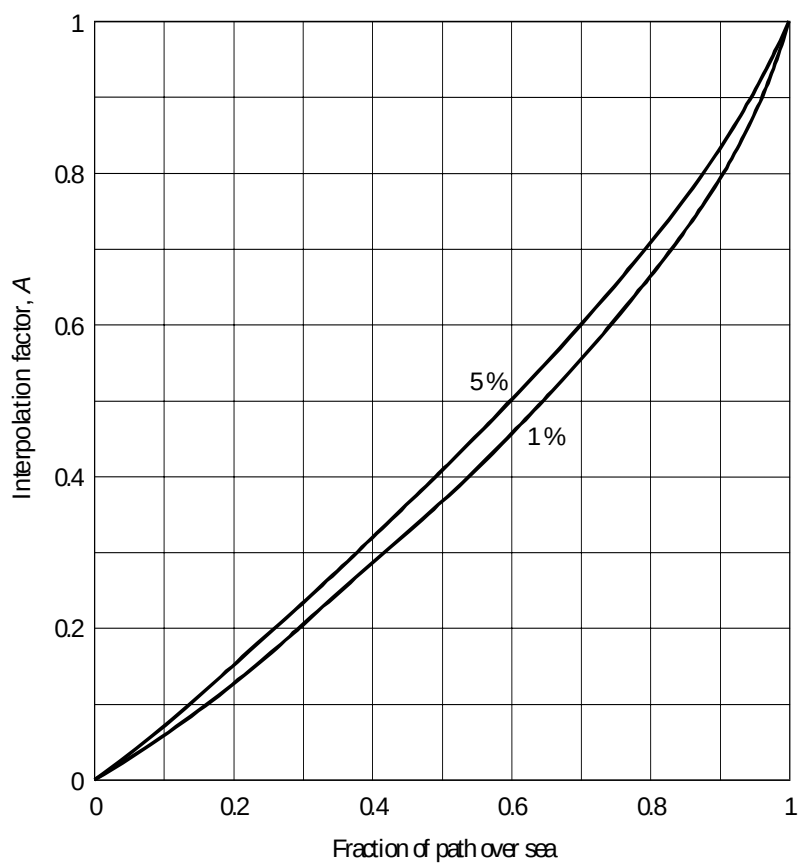

Interpolation factor Interpolacijski faktor
Fraction path over sea ... Delež poti nad morjem

PRILOGA 3 A

Osnovne karakteristike razdelitve T-DAB, ki se sporočijo kot predlog za spremembo načrta razdelitve v skladu s 4. členom

- 1 ADD/MOD¹/SUP
- 2 Koda ITU za upravo
- 3 Identifikator T-DAB
- 4 Leto, ko bo ta predložitev prevedena v eno ali več dodelitev
- 5 Ime razdelitve
- 6 Frekvenčni blok
- 7 Vrsta referenčnega omrežja (standardni referenčni modeli 1, 2 in 3; glej oddelek 5.3 Priloge 2)
- 8 Odmik² srednje frekvenca (kHz)
- 9 a Označiti, če je treba za razdelitev uporabiti preskusne točke na državni meji
- 9 b Če 9 a) ne velja, določiti do 36 koordinat preskusnih točk (dolžina in širina) v stopinjah, minutah in sekundah v smeri urnega kazalca z začetkom od severa
- 10 Datum predložitve
- 11 Pripombe

Opombi

- ¹ Za spremembo razdelitve se karakteristike, ki se spreminjajo, navedejo s starimi in novimi vrednostmi.
- ² Odmik je opredeljen kot razlika: (srednja frekvenca, ki se bo uporabljala) – (nazivna srednja frekvenca).

Za predložitev podatkov v elektronski obliki se uporabi oblika zapisa, določena v Dodatku 1 te priloge.

PRILOGA 3 B

Osnovne karakteristike dodelitev T-DAB, ki se sporočijo za prevedbo razdelitve T-DAB v eno ali več dodelitev v skladu s 6. členom

- 1 ADD/MOD¹/SUP
- 2 Koda ITU za odgovorno upravo
- 3 Identifikacijska koda dodelitve, ki jo uporablja uprava
- 4 Datum začetka obratovanja
- 5 Koda ITU za državo, v kateri je oddajnik
- 6 Identifikator T-DAB
- 7 Ime razdelitve
- 8 Ime oddajnika
- 9 Geografski koordinati oddajnika (širina in dolžina; v stopinjah, minutah, sekundah – zaželeno WGS84)
- 10 Nadmorska višina lokacije nad povprečno nadmorsko višino (m)
- 11 Frekvenčni blok
- 12 Nazivna srednja frekvenca
- 13 Odmik² srednje frekvence (kHz)
- 14 Največja efektivna sevana moč horizontalno polarizirane komponente (dBW)
- 15 Največja efektivna sevana moč vertikalno polarizirane komponente (dBW)
- 16 Polarizacija (horizontalna, vertikalna, mešana)
- 17 Višina oddajne antene nad zemeljskimi tlemi (m)
- 18 Slabljenje antene (dB) za horizontalno polarizirano komponento glede na največjo vrednost efektivne sevanje moči (navedene v 14) za vsak korak po 10 stopinj v smeri urnega kazalca z začetkom na severu
- 19 Slabljenje antene (dB) za vertikalno polarizirano komponento glede na največjo vrednost efektivne sevanje moči (navedene v 15) za vsak korak po 10 stopinj v smeri urnega kazalca z začetkom na severu
- 20 Efektivna višina antene (m) za vsak korak po 10 stopinj v smeri urnega kazalca z začetkom na severu
- 21 Številke soglasij iz načrta
- 22 Datum predložitve
- 23 **Pripombe**

Opombi

- ¹ Pri spreminjanju dodelitev se navedejo stare vrednosti karakteristik, ki se spreminjajo, in nove vrednosti.
- ² Odmik je opredeljen kot razlika: (srednja frekvenca, ki se bo uporabljala) – (nazivna srednja frekvenca).

Za predložitev podatkov v elektronski obliki se uporabi struktura zapisa, določena v Dodatku 2 k tej prilogi.

Dodatek 1

Struktura podatkov za elektronsko predložitev osnovnih karakteristik razdelitve T-DAB, ki se sporočijo za spremembo načrta razdelitve

Vsaka podatkovna datoteka vsebuje zapise stalne dolžine, ločene s parom znakov "Povratnica – Nova vrstica" (CrLf).

Vsak zapis vsebuje določeno število polj z znaki ASCII. Razlaga vsakega zapisa je nedvoumno določena v polju "Identifikator zapisa" (polje 1).

Vsako polje je enkratno določeno s svojim položajem v zapisu.

Polje	Zadeva	Začetni stolpec	Širina	Tip
1	Identifikator zapisa, obvezno 'ALL2'	1	4	A4
2	Koda ITU za odgovorno upravo (s podčrtavanjem do 3 znakov)	5	3	A3
3	Identifikator T-DAB (5-mestno identifikacijsko število)	8	5	A5
4	ADD/MOD/SUP (dodatek/sprememba/dopolnitev)	13	3	A3
5	Leto, v katerem se namerava predložena razdelitev prevesti v eno ali več dodelitev	16	4	I4
6	Ime razdelitve (do 20 črkovno-številčnih znakov)	20	20	A20
7	Frekvenčni blok T-DAB	40	3	A3
8	Vrsta referenčnega omrežja (standardni referenčni modeli 1, 2 in 3; glej oddelek 5.3 Priloge 2)	43	1	I1
9	Odmik srednje frekvenca v Hz – določen kot: (srednja frekvenca, ki se bo uporabljala) – (nazivna srednja frekvenca)	44	8	I8
10	Vnese se "B", kadar se za razdelitev uporabijo preskusne točke na državni meji. Sicer se pusti prazno	52	1	A1
11	Če je prejšnje polje prazno, vnesite število preskusnih točk (do 36)	53	2	I2
12	Preskusne točke. Do 36 koordinat (dolžina in širina) v stopinjah in minutah. Primer: 017E164346N2731 je koordinata 17 stopinj, 16 minut, 43 sekund vzhodno in 46 stopinj, 27 minut, 31 sekund severno	55	540	36(I3,A1,I2,I2, I2,A1,I2, I2)
13	Datum predložitve (DDMMLLLL)	595	8	2I2,I4
14	Pripombe	603	165	A165
99	Rezervirano za vzdrževanje	768	32	A32

Dolžina zapisa: 799 znakov

Dodatek 2

Struktura podatkov za elektronsko predložitev dodelitev T-DAB, ki se sporočijo za prevedbo razdelitve v eno ali več dodelitev

Vsaka podatkovna datoteka vsebuje zapise stalne dolžine, ločene s parom znakov "Povratnica – Nova vrstica" (CrLf).

Vsak zapis vsebuje določeno število polj z znaki ASCII. Razlaga vsakega zapisa je nedvoumno določena v polju "Identifikator zapisa" (polje 1).

Vsako polje je enkratno določeno s svojim položajem v zapisu.

Polje	Zadeva	Začetni stolpec	Širina	Tip
1	Identifikator zapisa, obvezno 'ASS2'	1	4	A4
2	Koda ITU za odgovorno upravo (s podčrtavanjem do 3 znakov)	5	3	A3
3	Identifikator T-DAB (5-mestno identifikacijsko število)	8	5	I5
4	ADD/MOD/SUP (dodatek/sprememba/dopolnitev)	13	3	A3
5	Identifikacijska koda dodelitve, ki jo uporablja uprava	16	9	A9
6	Datum začetka obratovanja (DDMMLLLL)	25	8	2I2, I4
7	Koda ITU za državo, v kateri je nameščen oddajnik (s podčrtavanjem do 3 znakov)	33	3	A3
8	Ime razdelitve	36	20	A20
9	Ime oddajne postaje	56	20	A20
10	Lokacija oddajnika – zemljepisna širina (v stopinjah, minutah in sekundah). Primer: 46N2731 je koordinata 46 stopinj, 27 minut in 31 sekund severno	76	7	I3, A1, 2I2
11	Lokacija oddajnika – zemljepisna dolžina (v stopinjah, minutah in sekundah). Primer: 017E1643 je koordinata 17 stopinj, 16 minut in 43 sekund vzhodno	83	8	I2, A1, 2I2,
12	Nadmorska višina lokacije (metrov nad morjem; predznak in številka)	91	5	I5
13	Frekvenčni blok T-DAB	96	3	A3
14	Nazivna srednja frekvenca v MHz (vključno z decimalno vejico)	99	9	F9.3
15	Odmik srednje frekvence v Hz – določen kot: (srednja frekvenca, ki se bo uporabljala) – (nazivna srednja frekvenca)	108	8	I8
16	Največja e.r.p. horizontalno polarizirane komponente (v dBW; predznak in število, vključno z decimalno vejico)	116	5	F5.1
17	Največja e.r.p. vertikalno polarizirane komponente (v dBW; predznak in število, vključno z decimalno vejico)	121	5	F5.1
18	Polarizacija (H/V/M)	126	1	A1
19	Višina oddajne antene (metrov nad zemeljskimi tlemi)	127	3	I3
20	usmerjena D/N neusmerjena	130	1	A1
21	Slabljenje antene – horizontalno. 36 vrednosti zmanjšanja e.r.p. (v dB) horizontalno polarizirane komponente v vodoravni ravnini v odvisnosti od največje komponente e.r.p., kot je podano v 16. polju (v presledkih po 10 stopinj z začetkom na severu v smeri urnega kazalca)	131	72	36I2
22	Slabljenje antene – vertikalno. 36 vrednosti zmanjšanja e.r.p. (v dB) vertikalno polarizirane komponente v vodoravni ravnini v odvisnosti od največje komponente e.r.p., kot je podano v 17. polju (v presledkih po 10 stopinj z začetkom na severu v smeri urnega kazalca)	203	72	36I2
23	Efektivna višina antene. Vpiše se 'U', če je efektivna višina antene enaka v vseh smereh. Sicer se vpiše 'N'	275	1	A1
24	Če je v prejšnjem polju vpisan 'U', se navede efektivna višina. Sicer je treba vpisati 36 vrednosti efektivne antenske višine (v metrih, v presledkih po 10 stopinj z začetkom na severu v smeri urnega kazalca)	276	180	36I5
25	Neuporabljeno	456	1	
26	Datum predložitve (DDMMLLLL)	457	8	2I2, I4
27	Številke soglasij v načrtu	465	100	20A5
28	Pripombe	565	203	A203
99	Rezervirano za vzdrževanje podatkovne zbirke	768	32	A32

Zapisana dolžina: 799 znakov

PRILOGA 4

TEHNIČNI POSTOPKI ZA USKLAJEVANJE

1 UVOD

Načrt razdelitve T-DAB je bil razvit z uporabo zasnove s preskusnimi točkami, referenčnimi omrežji T-DAB in sporazumi med upravami. Preskusne točke vzdolž meje vsakega območja razdelitve T-DAB, ki naj bo zaščiteno, so uprave sporočile zasedanju o načrtovanju.

Ta priloga podrobno opisuje postopke za:

- prevedbo razdelitve v eno ali več dodelitev;
- dodajanje ali spreminjanje razdelitve.

2 POSTOPKI ZA PREVEDBO RAZDELITVE V ENO ALI VEČ DODELITEV

2.1 Splošni postopki

Naslednji postopki so bili določeni tako, da omogočajo uporabo načrta brez nepotrebnih omejitev.

Predpostavlja se, da bo razdelitev T-DAB izvedena kot niz oddajnih postaj, ki obratujejo kot enofrekvenčno omrežje. To se v nadaljevanju šteje za "realno omrežje".

Poljska jakost, ki jo proizvaja vsak oddajnik realnega omrežja, se ugotavlja v vsaki preskusni točki z uporabo metode napovedovanja poljske jakosti, določene v oddelku 2 Priloge 2.

Pri morebitnem motenju letalske mobilne storitve se uporabi model razširjanja v praznem prostoru z upoštevanjem pogoja vidnosti med oddajnikom in preskusno točko ter največje razdalje 500 km. Vrednost posamezne poljske jakosti se popravi, kadar je primerno, z upoštevanjem diskriminacije vsake sprejemne antene. Kumulativna moteča poljska jakost se računa z metodo vsote moči, pri čemer se rezultat zaokroži na eno decimalko, kot je razloženo v nadaljevanju.

Upošteva se samo motenje iz te razdelitve, prevedene v dodelitev.

Posamezne poljske jakosti na vseh preskusnih točkah iz vseh oddajnih postaj razdelitve T-DAB se obdelujejo v padajočem zaporedju. Vsota moči se dobi takole:

- začne se pri največji, dodajo se vrednosti moči, enake motečim poljskim jakostim, druga za drugo;
- pri vsakem seštevanju se rezultat primerja s prejšnjim rezultatom;
- če je povečanje moči večje ali enako 0,5 dB, se postopek seštevanja nadaljuje;
- če pa je povečanje moči manjše od 0,5 dB, se postopek seštevanja ustavi, doda 0,5 dB in ta rezultat je vsota moči.

Zaradi prožnosti pri razvoju storitev T-DAB je treba zagotoviti celotno omejitev motenja, kar je mogoče doseči z nizom dodelitev T-DAB. V ta namen je danih nekaj izračunskih preskusnih točk (glej Dodatek 1).

Da se izogne dvoumnosti, organ za upravljanje načrta določi položaje izračunskih preskusnih točk za vsako razdelitev in jih razpošlje vsem upravam, potem ko z zadevnimi upravami razreši vse možne nepravilnosti glede položajev preskusnih točk.

Za ugotavljanje katerekoli prizadete države ali držav pri izračunavanju mešanih poti so potrebne sporazumno določene obalne črte in enako tudi sporazumno določene državne meje. Za obalno črto se upoštevajo sedanje različice zveze ITU. Za državne meje se uporabijo podatki, sporazumno določeni med upravami konference CEPT po chestrskem zasedanju.

Poleg vseh omejitev zaradi zahtev po zaščiti, podrobno navedenih v oddelkih 2.2 in 2.3, je treba, če kumulativna poljska jakost iz oddajnikov realnega omrežja preseže 41,0 dB(μ V/m) na katerikoli izračunski preskusni točki (glej dodatek 1), opraviti usklajevanje z vsako od držav:

- ki je prizadeta z izračunom preskusne točke, v kateri vrednost kumulativne poljske jakosti preseže 41,0 dB(μ V/m), ali
- leži ob podaljšku črte, ki določa lokacijo izračunske preskusne točke, do točke, v kateri vrednost poljske jakosti doseže 41,0 dB(μ V/m).

Če so bile glede oddelka 3 v postopku za dodajanje ali spreminjanje razdelitve pri izračunu preskusnih točk ugotovljene vrednosti največjih dopustnih kumulativnih poljskih jakosti nižje od 41,0 dB(μ V/m), se zahteva usklajevanje enako, kot da bi bile te vrednosti presežene.

Če dodelitev, za katero se zahteva prevedba iz razdelitve, preseže ustrezne omejitve, lahko uprave poskusijo doseči medsebojni dogovor. Če to ni mogoče, se uporabi oddelek 3.

2.2 Združljivost storitve T-DAB s storitvijo T-DAB

2.2.1 Zaščita soblokovnih razdelitev

Na preskusnih točkah, ki ležijo na mejah in opisujejo vse druge soblokovne razdelitve, moteča poljska jakost realnega omrežja ne sme preseči ravni 41,0 dB(μ V/m), razen če to dovoljujejo posebni sporazumi med zadevnimi upravami. Take sporazume je treba doseči z dvostranskim ali večstranskim usklajevanjem. Ta vrednost kaže, da poljska jakost, predvidena za zaščito, pomeni 69,0 dB(μ V/m) na podlagi zaščitnega razmerja 10 dB in margine 18 dB (da omogoči zaščito 99 % lokacij). Pri referenčnem omrežju dve in referenčnem omrežju tri se vrednosti poljskih jakosti povečajo za 2 oziroma 4 dB.

Pri razdelitvah ali dodelitvah, ki so usklajene po zasedanju o načrtovanju v Maastrichtu in kjer so izračunske preskusne točke prizadete ali soblokovne razdelitve nameščene znotraj območja druge razdelitve, je treba priglasiti zapis o največjih ravneh moteče poljske jakosti na posameznih preskusnih točkah prizadetih in usklajenih soblokovnih razdelitev, sprejetih, ko so razdelitve prevedene v dodelitve.

2.2.2 Zaščita sosednjih blokov na bližnjih območjih

Usklajevanje je potrebno, če je kumulativna moteča poljska jakost realnega omrežja večja od 81 dB(μ V/m) na meji katerekoli razdelitve s frekvenčnim blokom, ki je sosednji tistemu bloku, ki se prevaja v dodelitev. Če obrobje moteče poljske jakosti predlagane postaje prečka mejo bližnje sosednje blokovne razdelitve, je morda treba opraviti vizualni pregled ustreznih zemljevidov in narediti izračune, s katerimi se določijo dodatne preskusne točke ob upoštevanju topografije.

2.3 Združljivost storitve T-DAB z drugimi storitvami

Kumulativna moteča poljska jakost, ki jo ustvarja realno omrežje, se preverja na vsaki mejni preskusni točki druge storitve, ležeči znotraj kroga s polmerom 500 km, ki obkroža vsako mejno preskusno točko razdelitve, ki se prevaja v dodelitve.

Če ni nobenega sporazuma o pogojih uporabe razdelitev T-DAB glede na druge storitve, se upošteva največja dopustna poljska jakost (izračunana po oddelku 4.2.2 Priloge 2), da je zaščiten ustrezna druga storitev.

Izračun največje dopustne poljske jakosti mora upoštevati vrednost poljske jakosti, ki naj se ščiti, kar je navedeno v podatkih, uporabljenih na zasedanju o načrtovanju, kadar ima večji pomen od privzete vrednosti, navedene v Prilogi 2 te druge storitve.

Usklajevanje je potrebno, če kumulativna moteča poljska jakost realnega omrežja preseže vrednost največje dopustne poljske jakosti na katerikoli mejni preskusni točki za potrebe dane druge storitve, kot je opisano v oddelku 4.2.2 Priloge 2.

Vseeno pa se lahko razdelitev T-DAB v Prilogi 1, če je brez zvezdice in drugih pogojev za uporabo, prevede v dodelitve T-DAB brez omejitev pod pogojem, da kumulativna moteča poljska jakost realnega omrežja ne preseže najslabše možne moteče poljske jakosti iz referenčnega omrežja na katerikoli mejni preskusni točki razdelitve T-DAB.

Če obstaja poseben sporazum o pogojih uporabe razdelitve T-DAB glede na drugo storitev, se opravi usklajevanje:

- če sporazum določa, da je usklajevanje potrebno pred prevedbo razdelitve, ali
- če kumulativna moteča poljska jakost realnega omrežja preseže dogovorjeno vrednost, če je ta vrednost določena s sporazumom, ali

- če sporazum ne vključuje niti zahteve za usklajevanje niti posebne omejitve poljske jakosti za T-DAB,
 - če kumulativna moteča poljska jakost realnega omrežja preseže najslabše možno motenje iz referenčnega omrežja na katerikoli mejni preskusni točki razdelitve T-DAB na katerikoli mejni preskusni točki območja druge storitve, razen
 - na tistih mejnih preskusnih točkah območja druge storitve, na katerih kumulativna moteča poljska jakost ne presega največje vrednosti dopustne poljske jakosti (računano po oddelku 4.2.2 Priloge 2);
 - tistih točk, ki ležijo znotraj razdalje 10 km od razdelitve T-DAB, na začetku približno izračunanih z uporabo mejnih preskusnih točk;
- in tudi, če kumulativna moteča poljska jakost preseže vrednost 38 dB(μ V/m) na katerikoli posebni izračunski preskusni točki, ki leži znotraj območja druge storitve; te posebne izračunske preskusne točke se vzpostavijo v skladu z Dodatkom 1 te priloge.

V tem zadnjem primeru se na vsaki od teh preskusnih točk sprejme kumulativna moteča poljska jakost realnega omrežja, če ne presega najslabše možne moteče poljske jakosti iz referenčnega omrežja v katerikoli mejni preskusni točki razdelitve T-DAB, kakor se razume iz sporazuma, ki nima izrecnih omejitev.

Poleg tega se morajo uprave pri obravnavi zahtev za usklajevanje zavedati, da se je pri načrtovanju realnih omrežij težko izogniti majhnim preseganjem poljske jakosti iz referenčnega omrežja (1 do 2 dB) pri manjšem številu preskusnih točk. Med postopkom usklajevanja je treba take primere obravnavati v duhu sodelovanja.

3 POSTOPKI ZA DODAJANJE ALI SPREMINJANJE RAZDELITVE

Pri izvajanju postopkov iz 4. člena se uporabijo metode in merila iz Priloge 2, s katerimi se ugotavlja, ali je katera druga uprava prizadeta zaradi predloga za novo ali spremenjeno razdelitev.

Usklajevanje je potrebno, če razdelitev ob uporabi enega od referenčnih omrežij, določenih v Prilogi 2:

- povzroči poljske jakosti, večje od ali enake 38 dB(μ V/m) na meji katerekoli druge uprave, ali
- ob upoštevanju katerekoli druge storitve povzroči poljske jakosti, večje od največjih dovoljenih motečih poljskih jakosti ali enake tem jakostim na meji katerekoli druge uprave.

Zaprosila za usklajevanje obravnava organ za upravljanje načrta po zaporedju, kot so prejeta; datum prejema vsakega zaprosila se zapiše in objavi skupaj z zaprosilom.

Če se zaprosilo za usklajevanje predloži, preden organ za upravljanje načrta objavi zaprosilo druge uprave za usklajevanje in če sta ti dve zaprosili medsebojno nezdružljivi, sta pri dvostranskih pogajanjih med zadevnima upravama enakovredni.

Uprava prosilka lahko priloži, kot je navedeno v Prilogi 3B, popolne tehnične karakteristike dodelitev, ki jih namerava uporabiti za pokrivanje območja razdelitve. V tem primeru uprava prosilka v obrazcu za usklajevanje iz Priloge 3A izjavi, da bodo te dodelitve uporabljene za izračunavanje v postopku usklajevanja namesto enega od referenčnih omrežij, kot je določeno v Prilogi 2.

Način izračuna preskusnih točk je isti postopek, kot je naveden v Dodatku 1 te priloge. Vseeno morajo biti v primeru iz prejšnjega odstavka izračunske preskusne točke na lokacijah, na katerih oddajne postaje teh dodelitev ustvarjajo kumulativno poljsko jakost 38 dB(μ V/m). Če nadaljnja prevedba razdelitve vključi dodelitve, ki se kakorkoli razlikujejo od tistih, ki so vključene v usklajevanje razdelitve, se uporabi postopek iz oddelka 2 te priloge.

Uprava, ki prejme zaprosilo za usklajevanje razdelitve, ki je soblok eni od njenih obstoječih razdelitev, lahko sporazum pogojuje z ohranjanjem obstoječih pravic za uporabo te obstoječe razdelitve. Tak pogoj pomeni, da nova razdelitev nima pravice do zaščite pred obstoječo razdelitvijo znotraj obrobja, opisanega z izračunskimi preskusnimi točkami slednje.

Uvedba frekvenčnih odmkov za bloke T-DAB v načrtu se šteje kot sprememba, ki jo je treba uskladiti. O ustreznih usklajevalnih merilih za urejanje razmerij T-DAB proti T-DAB se dogovorijo zadevne uprave.

Uporaba frekvenčnih odmkov za bloke T-DAB glede na frekvence, sprejete v načrtu, se lahko npr. razume tudi kot zmanjševanje motenja sosednjega bloka.

Take spremembe vključujejo vpliv na zasnove sprejemnikov T-DAB in je treba učinkovanje odmkov uskladiti med zadevnimi upravami v okviru postopkov za dodajanje ali spreminjanje razdelitve. V vsakem primeru pa mora biti odmkov čim manj.

4 SPLOŠNO

Upošteva se načelo enakomerne porazdelitve frekvenčnih virov, še zlasti, če je zaproseno usklajevanje za razdelitve, ki bi lahko pomembno vplivale na razvoj načrte drugih uprav za storitve T-DAB. V takem primeru mora uprava prosilka obvestiti prizadete države, preden pošlje zaprosilo za usklajevanje. Vsekakor mora imeti uprava ob zaprosilu za dodatek ali spremembo resen namen, da svoje razdelitve v primerni prihodnosti prevede v eno ali več dodelitev. Poleg tega je treba vedeti, da se lahko zaprosila v naravi in podrobnostih spreminjajo od države do države. Če je treba, lahko uprave uporabijo postopek iz četrtega odstavka 2. člena.

Pri dvostranskih ali večstranskih sporazumih se lahko uprave dogovorijo za uporabo različnih modelov za napovedovanje poljskih jakosti, npr. z obravnavo topografskih elementov. Podobno se lahko sporazumejo o programu meritev za potrjevanje napovedanih rezultatov.

DODATEK 1

VZPOSTAVITEV IZRAČUNSKIH PRESKUSNIH TOČK

1 Mesta izračunskih preskusnih točk se določijo po tem postopku.

2 Navpični bisektorji:

izračunske preskusne točke so nameščene zunaj območja razdelitve vzdolž navpičnega bisektorja vsake od črt, ki spajata sosednji mejni preskusni točki, kjer bi bila vrednost poljske jakosti referenčnega omrežja enaka 38,0 dB(μ V/m). Za primer so točka P na slikah 1, 3 in 5, točke 2, 4, 6, 8 in 14 na sliki 7 in točki 1 b in 1 c na sliki 8.

3 Kotni bisektorji:

naslednje izračunske preskusne točke so nameščene zunaj območja razdelitve vzdolž bisektorja kota, ki ga sestavljata črti, ki spajata vsako od mejnih preskusnih točk z njenima sosednjima preskusnima točkama, kjer bi bila vrednost poljske jakosti iz referenčnega omrežja enaka 38,0 dB(μ V/m). Za primer so točka P na slikah 2, 4 in 6, točke 1, 3, 5, 7, 10 in 13 na sliki 7, točke 1 a, 2 a in 3 a na sliki 8 in točka 2 e na sliki 9.

Z upoštevanjem geometrije meje razdelitve na slikah 8 in 9 se uporabijo ti postopki:

3.1 Če je $\alpha < 180^\circ$ (glej sliko 8):

- se dodatne izračunske preskusne točke namestijo zunaj območja razdelitve vzdolž navpičnic na črti, ki povezujeta točko A s točko B in točko C s točko D, kjer bi bila poljska jakost iz referenčnega omrežja v točki B enaka 38,0 dB(μ V/m). Preskusni točki 1 e in 1 d sta rezultat.
- Če je razdalja od postavljenih dodatnih izračunskih preskusnih točk 1 e in 1 d do izračunske preskusne točke 1 a večja od 45 km, se dodatne izračunske preskusne točke postavljajo z delitvijo enakomernih odsekov od preskusne točke 1 a do preskusne točke 1 e oziroma od preskusne točke 1 a do preskusne točke 1 d, dokler ni dosežena vrednost:

$$\beta < 2 \arcsin(d/2D)$$

kjer: d je 45 km in

D je večja od razdalj od točke B do preskusne točke 1 e in od točke B do preskusne točke 1 a, če je sektor med preskusnima točkama 1 e in 1 a, ali večja od razdalj od točke B do preskusne točke 1 d in od točke B do preskusne točke 1 a, če je sektor med točkama 1 a do 1 d.

- Izračunska preskusna točka na vsaki od teh dodatnih črt je na mestu, kjer ima poljska jakost vrednost 38,0 dB(μ V/m), slednjo proizvaja referenčno omrežje, nameščeno na preskusni točki B. To vodi k izračunskim preskusnim točkam 1 f in 1 g v primeru geometrije s slike 8.

3.2 Če je $\alpha \geq 180^\circ$ (glej sliko 9):


- se dodatne izračunske preskusne točke namestijo vzdolž bisektorja kota, ki ga sestavljata črti, ki spajata preskusne točke razdelitve A, B in C zunaj območja razdelitve, kjer bi bila poljska jakost iz referenčnega omrežja enaka 38,0 dB(μ V/m).
- Če poljska jakost referenčnega omrežja na katerikoli drugi preskusni točki razdelitve povzroči večjo poljsko jakost, ki je večja od zgornje, se izračunska preskusna točka odmakne še bolj zunaj območja razdelitve vzdolž bisektorja kota, vse dokler ni poljska jakost iz referenčnega omrežja na vseh preskusnih točkah območja razdelitve enaka ali manjša od 38,0 dB(μ V/m), kar kaže izračunska preskusna točka 2 e na sliki 9.

4 Vse izračunske preskusne točke, ki ležijo znotraj območja razdelitve, se ne upoštevajo, npr. točka 12 na sliki 7.

5 Izračunske preskusne točke, ki ležijo preblizu meji območja razdelitve, tako da bi bila lahko poljska jakost iz referenčnega omrežja večja od 38,0 dB(μ V/m), se ne upoštevajo, npr. točki 9 in 11 na sliki 7.

- 6 Če je dolžina črte med sosednjima izračunskima preskusnima točkama večja od 45 km, se postavijo dodatne izračunske preskusne točke z enakomerno razdelitvijo črte, vse dokler ni razdalja med sosednjima izračunskima preskusnima točkama manjša od zgornje vrednosti.
- 7 Izjema je primer, ko je soblok razdelitve T-DAB na krajši razdalji, sicer je razdalja med mejo razdelitve in ustrezno izračunsko preskusno točko približno enaka spodnji razpredelnici:


	Referenčno omrežje 1	Referenčno omrežje 2	Referenčno omrežje 3
Samo nad kopnim	61 km	48 km	29 km
Samo nad hladnim morjem	354 km	380 km	326 km
Samo nad toplim morjem	500 km	534 km	450 km

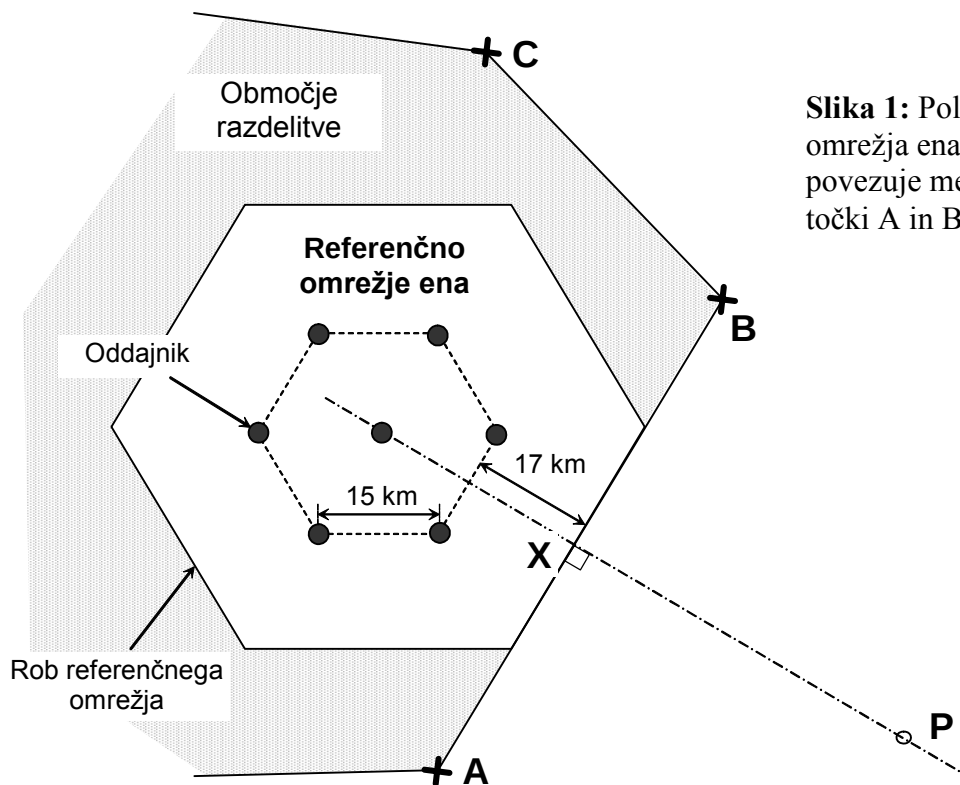

Slika 1: Položaj referenčnega omrežja ena glede na črto, ki povezuje mejni preskusni točki A in B

Opombe:


- Točke A, B in C so mejne točke območja razdelitve.
- Točka X je vmesna točka na črti A–B in je tudi referenčna točka referenčnega omrežja.
- Črta, ki jo določata točki X in P, je navpični bisektor črte A–B in je tudi črta, ob kateri se računa moteča poljska jakost.

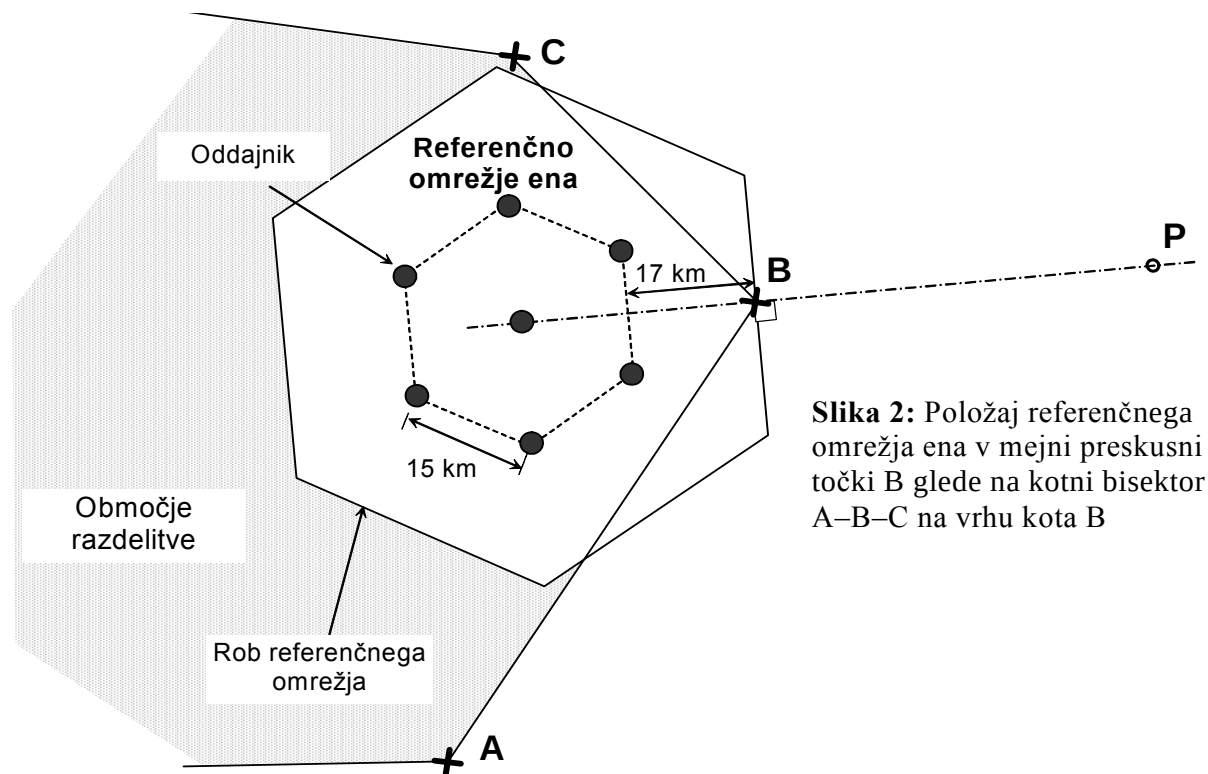

Slika 2: Položaj referenčnega omrežja ena v mejni preskusni točki B glede na kotni bisektor A–B–C na vrhu kota B

Opombe:


- Točke A, B in C so mejne točke območja razdelitve.
- Točka B je vrh kota A–B–C in tudi referenčna točka referenčnega omrežja.
- Črta, ki jo določata točki B in P, je kotni bisektor kota A–B–C in tudi črta, vzdolž katere se računa moteča poljska jakost.

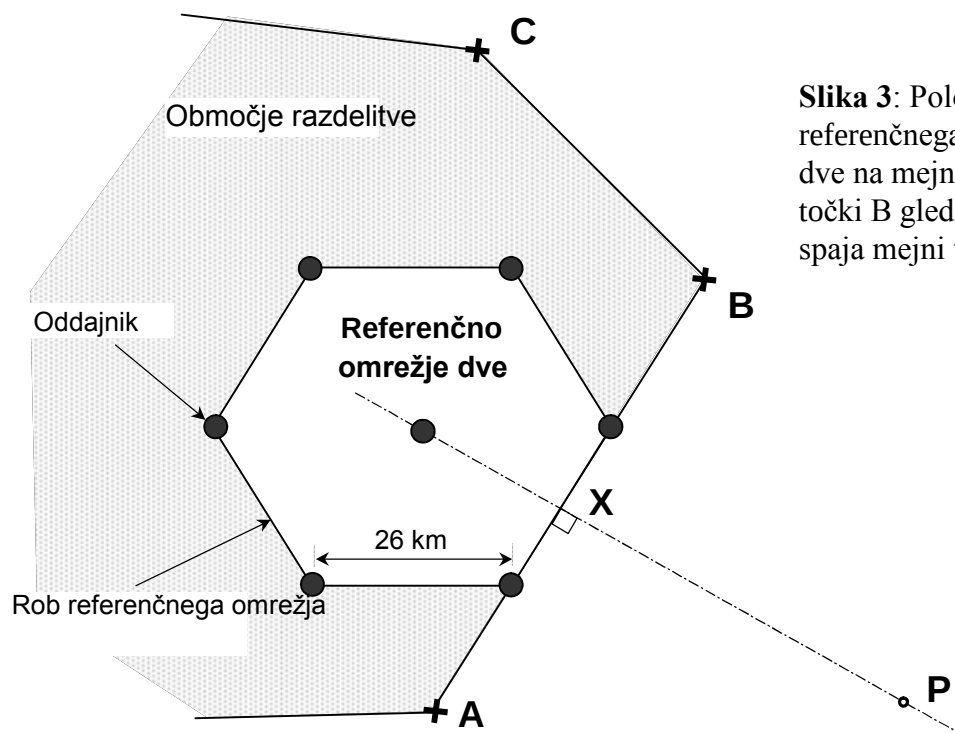

Slika 3: Položaj referenčnega omrežja dve na mejni preskusni točki B glede na črto, ki spaja mejni točki A in B

Opombe:


- Točke A, B in C so mejne točke območja razdelitve.
- Točka X je vmesna točka črte A–B in tudi referenčna točka referenčnega omrežja.
- Črta, ki jo določata točki X in P, je navpični bisektor črte A–B in tudi črta, ob kateri se meri moteča poljska jakost.

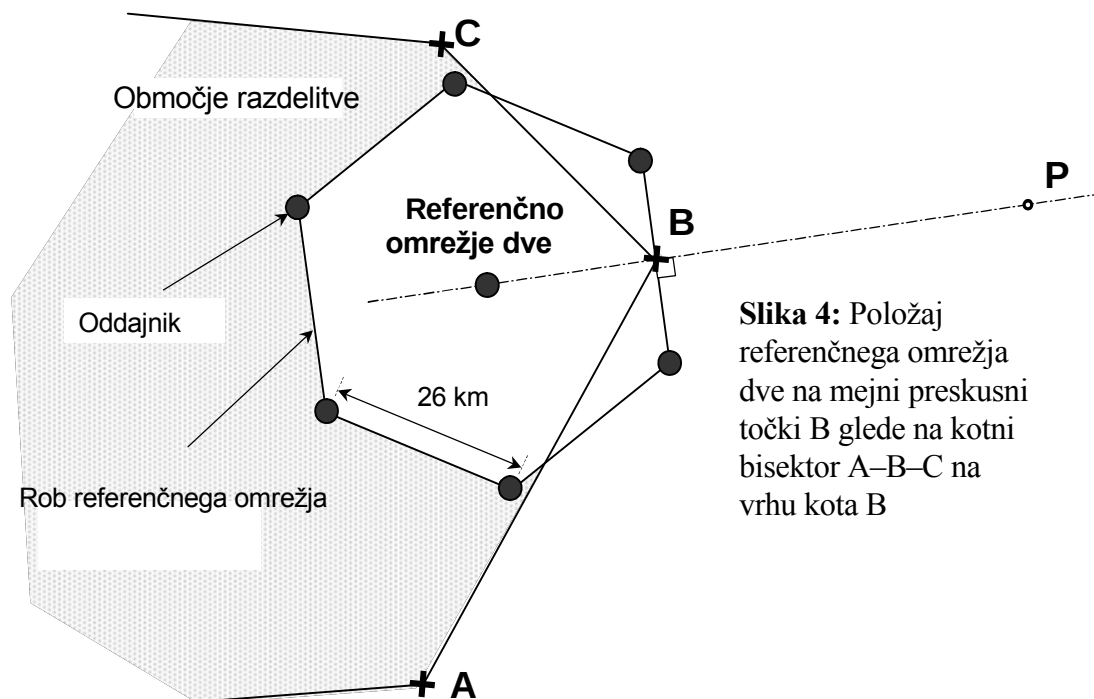

Slika 4: Položaj referenčnega omrežja dve na mejni preskusni točki B glede na kotni bisektor A–B–C na vrhu kota B

Opombe:


- Točke A, B in C so mejne točke območja razdelitve.
- Točka B je vrh kota A–B–C in tudi referenčna točka referenčnega omrežja.
- Črta, ki jo določata točki B in P, je kotni bisektor kota A–B–C in tudi črta, ob kateri se računa moteča poljska jakost.

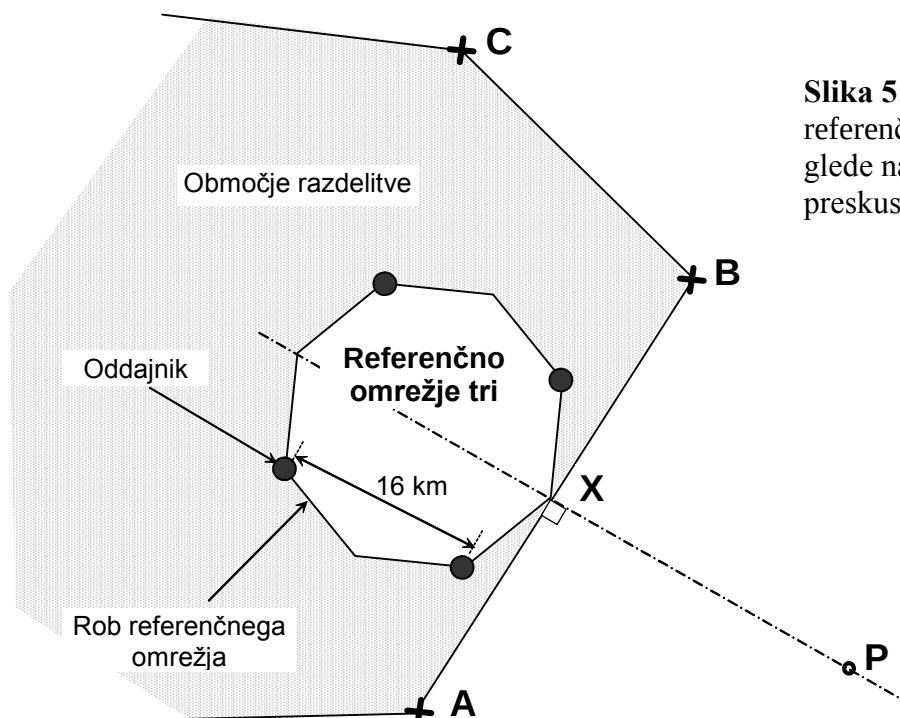

Slika 5: Položaj referenčnega omrežja tri glede na črto, ki spaja mejni preskusni točki A in B

Opombe:


- Točke A, B in C so mejne točke območja razdelitve.
- Točka X je vmesna točka črte A–B in tudi referenčna točka referenčnega omrežja.
- Črta, ki jo določata točki X in P, je navpični bisektor črte A–B in tudi črta, ob kateri se računa moteča poljska jakost.

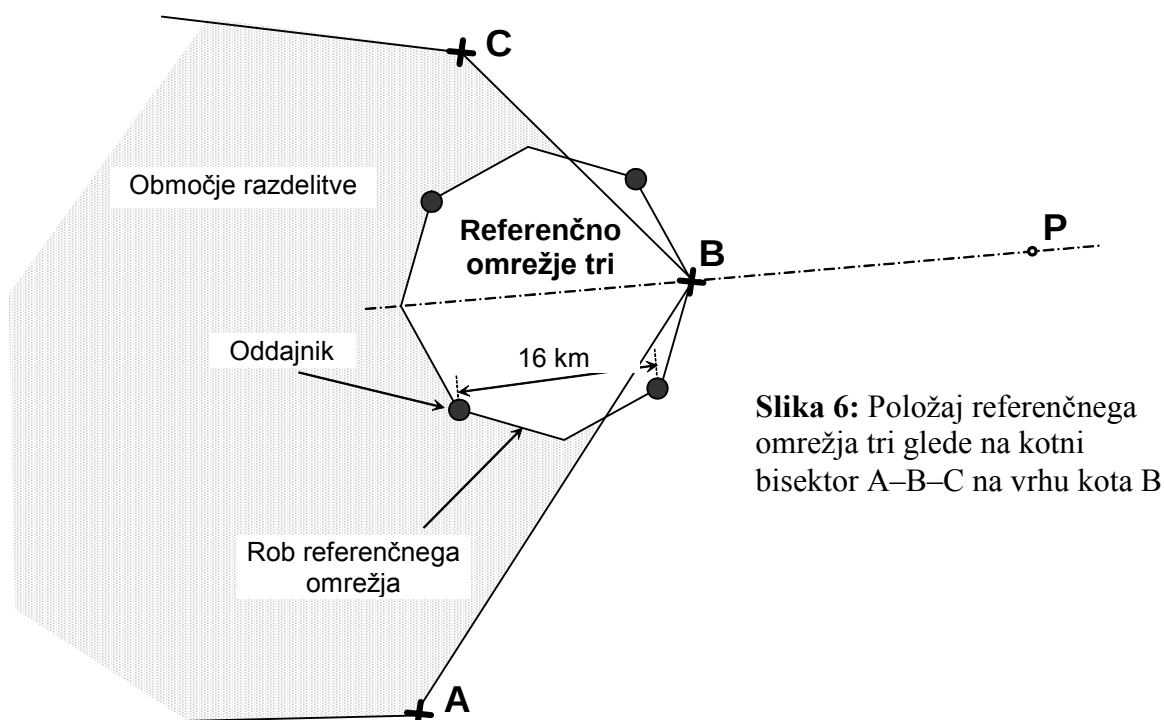

Slika 6: Položaj referenčnega omrežja tri glede na kotni bisektor A–B–C na vrhu kota B

Opombe:


- Točke A, B in C so mejne točke na območju razdelitve.
- Točka B je vrh kota A–B–C in tudi referenčna točka referenčnega omrežja.
- Črta, ki jo določata točki B in P, je kotni bisektor črte A–B in tudi črta, ob kateri se računa moteča poljska jakost.

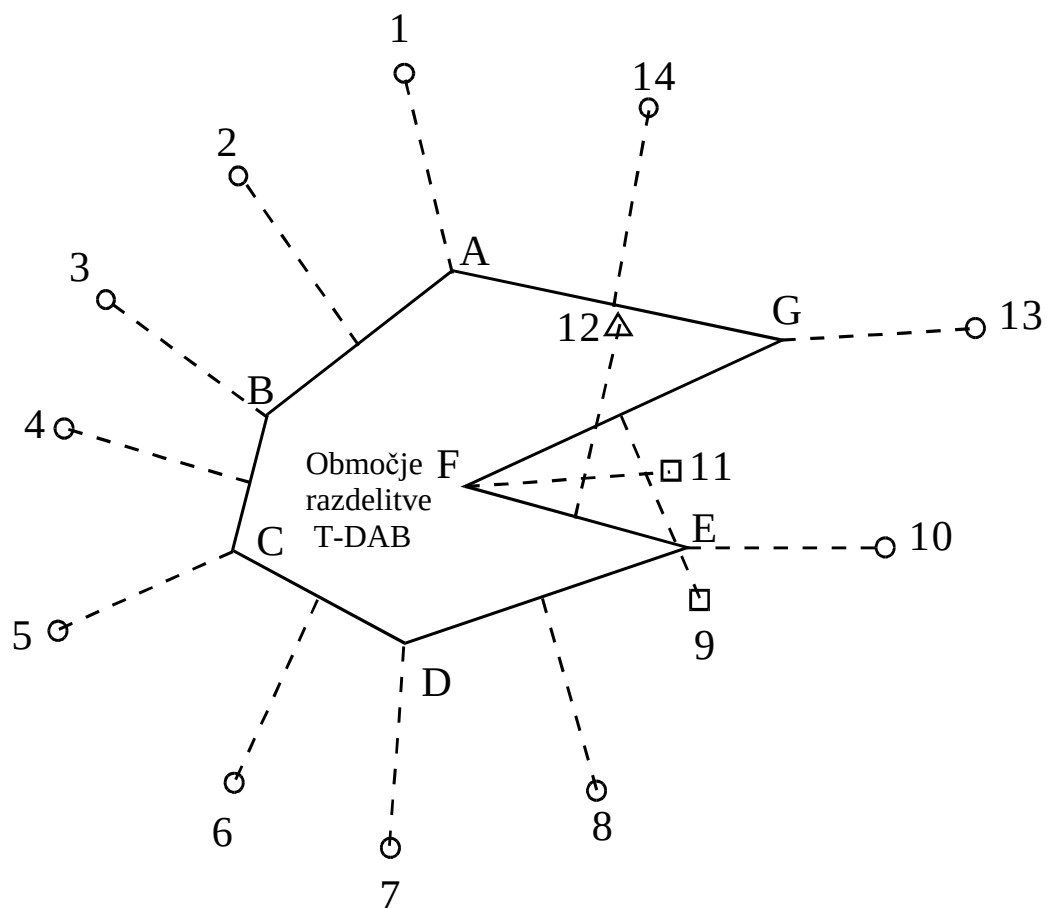


Slika 7: Mesto izračunskih preskusnih točk

Opomba 1: Točke od A do G so mejne preskusne točke razdelitve.

Opomba 2: Točke od 1 do 14, razen točk 9, 11 in 12, so izračunske preskusne točke.

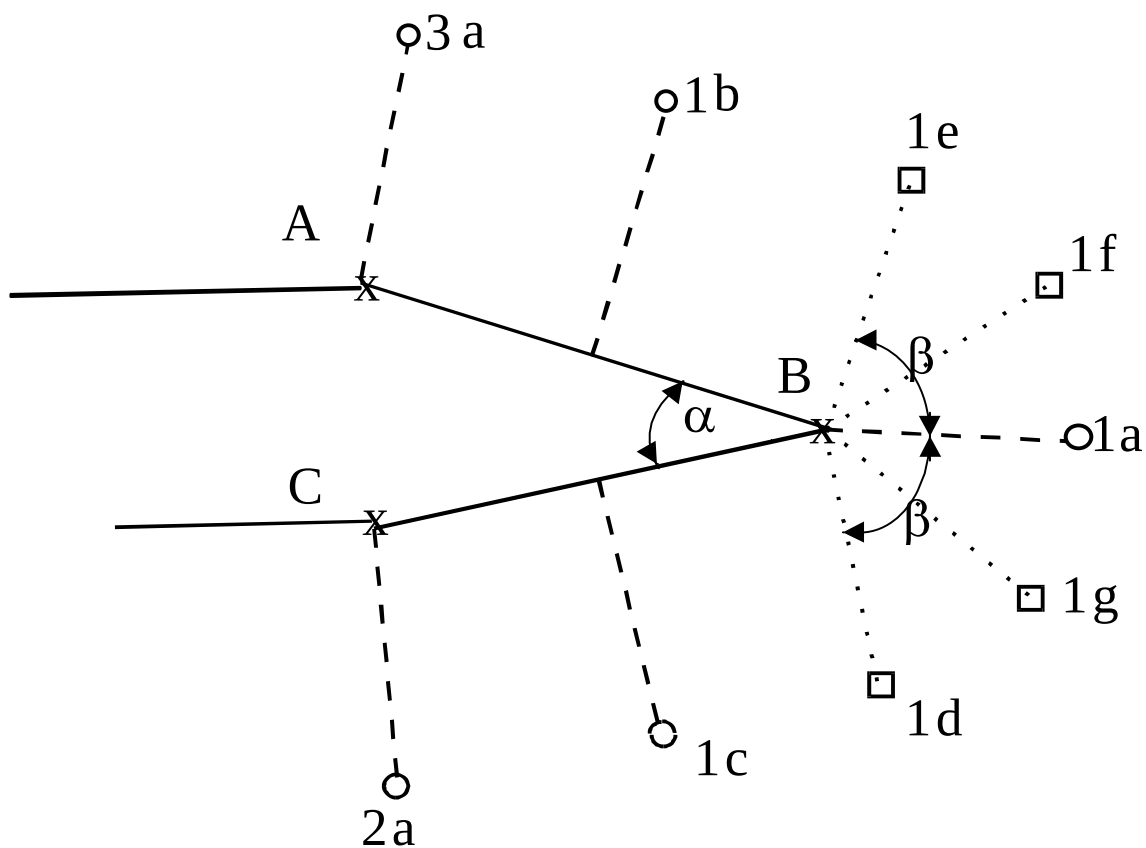

Slika 8: Postavitev dodatnih izračunskih preskusnih točk, če je $\alpha < 180^\circ$ (glej spodnjo opombo)

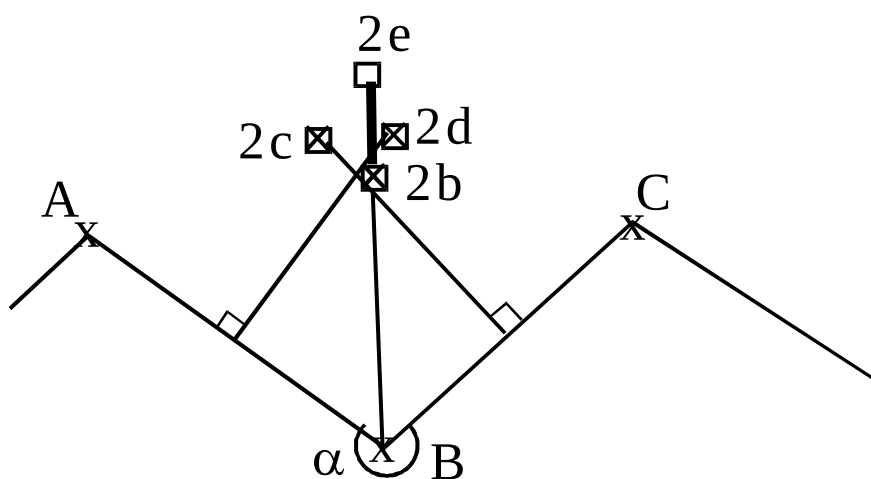

Slika 9: Postavitev dodatnih izračunskih preskusnih točk, če je $\alpha \geq 180^\circ$ (glej spodnjo opombo)

Opomba:

- 1a, 1b, 1c, 2a, 3a
- 1d, 1e, 1f, 1g, 2e
- ⊠ 2b, 2c, 2d

A, B, C so mejne preskusne točke razdelitve


izračunske preskusne točke

dodatne izračunske preskusne točke

neupoštevane izračunske preskusne točke, ker poljska jakost presega določeni prag


Ta shema je samo informativna in ni del posebnega dogovora.

Čl. 4.3.1
Čl. 4.3.2
Čl. 4.3.3

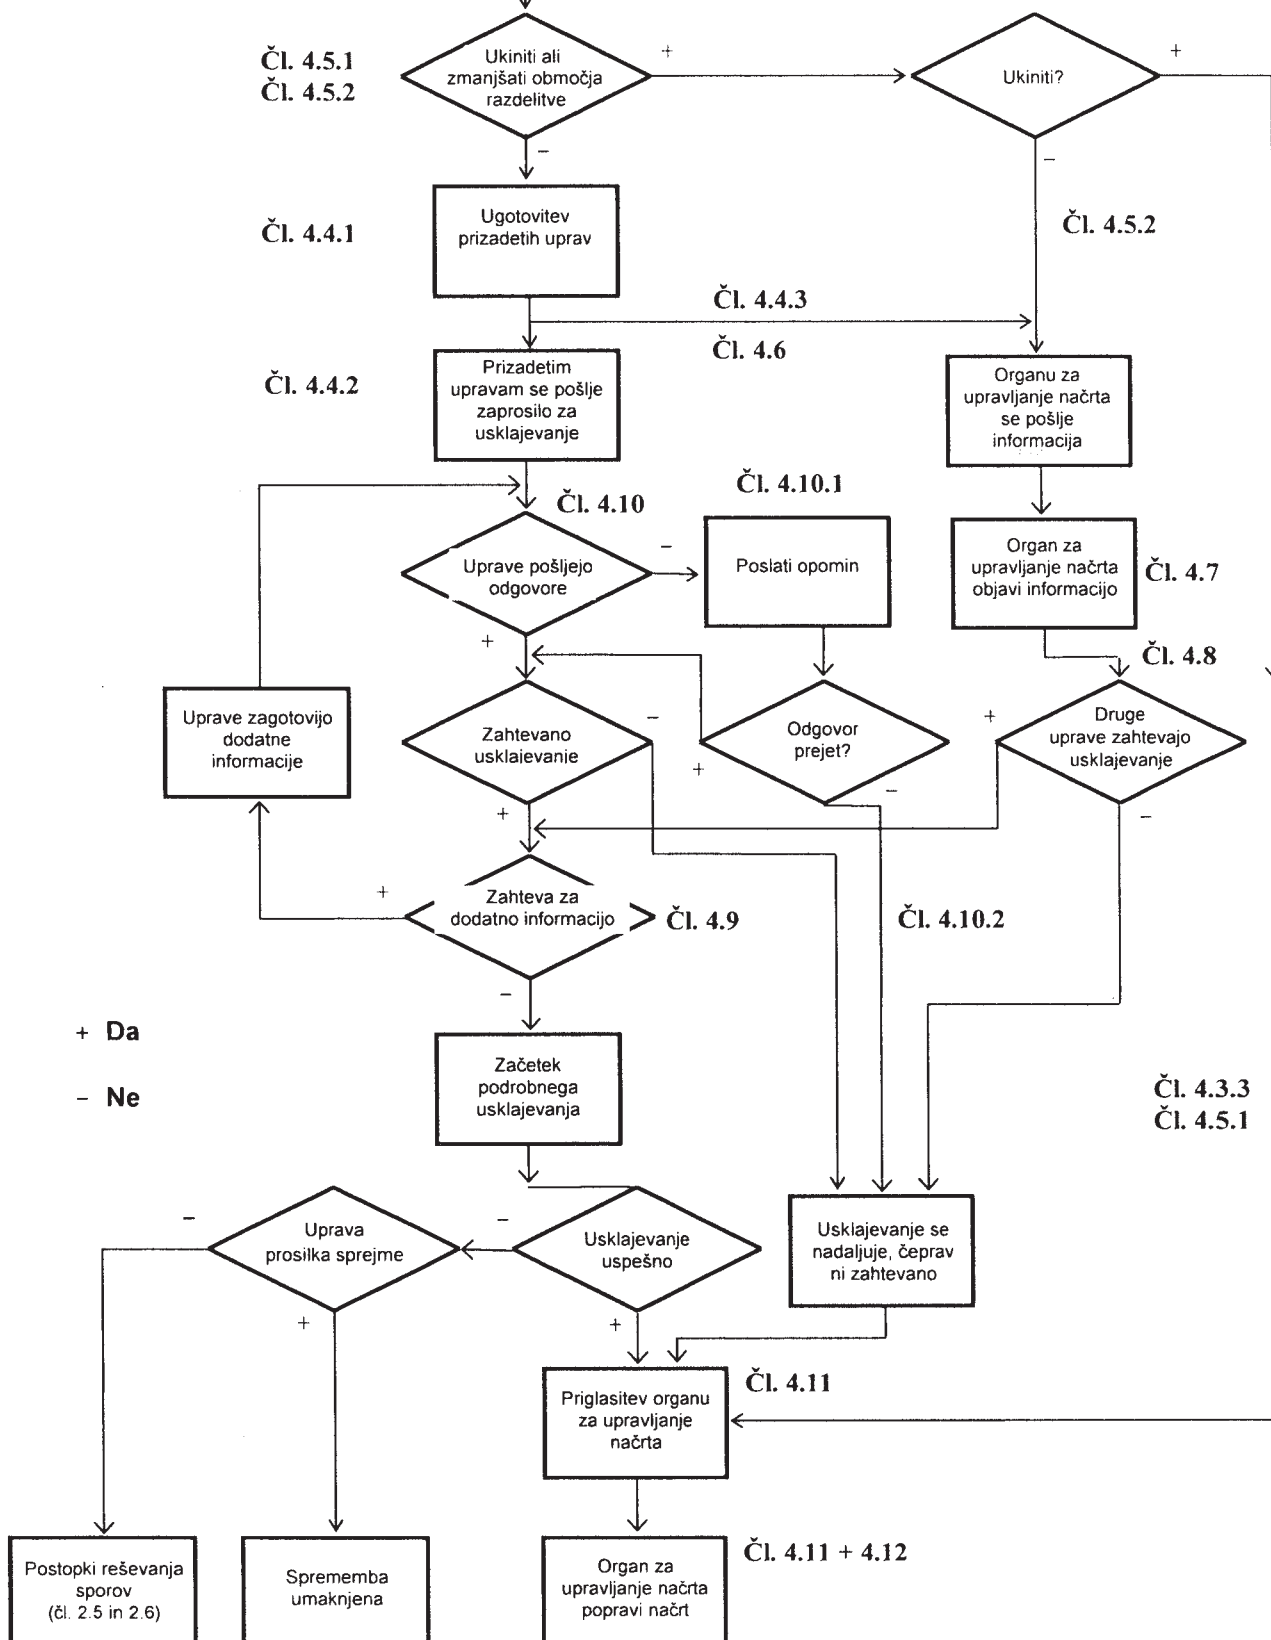

Dodatek 3 k Prilogi 4

Postopek po 6. členu

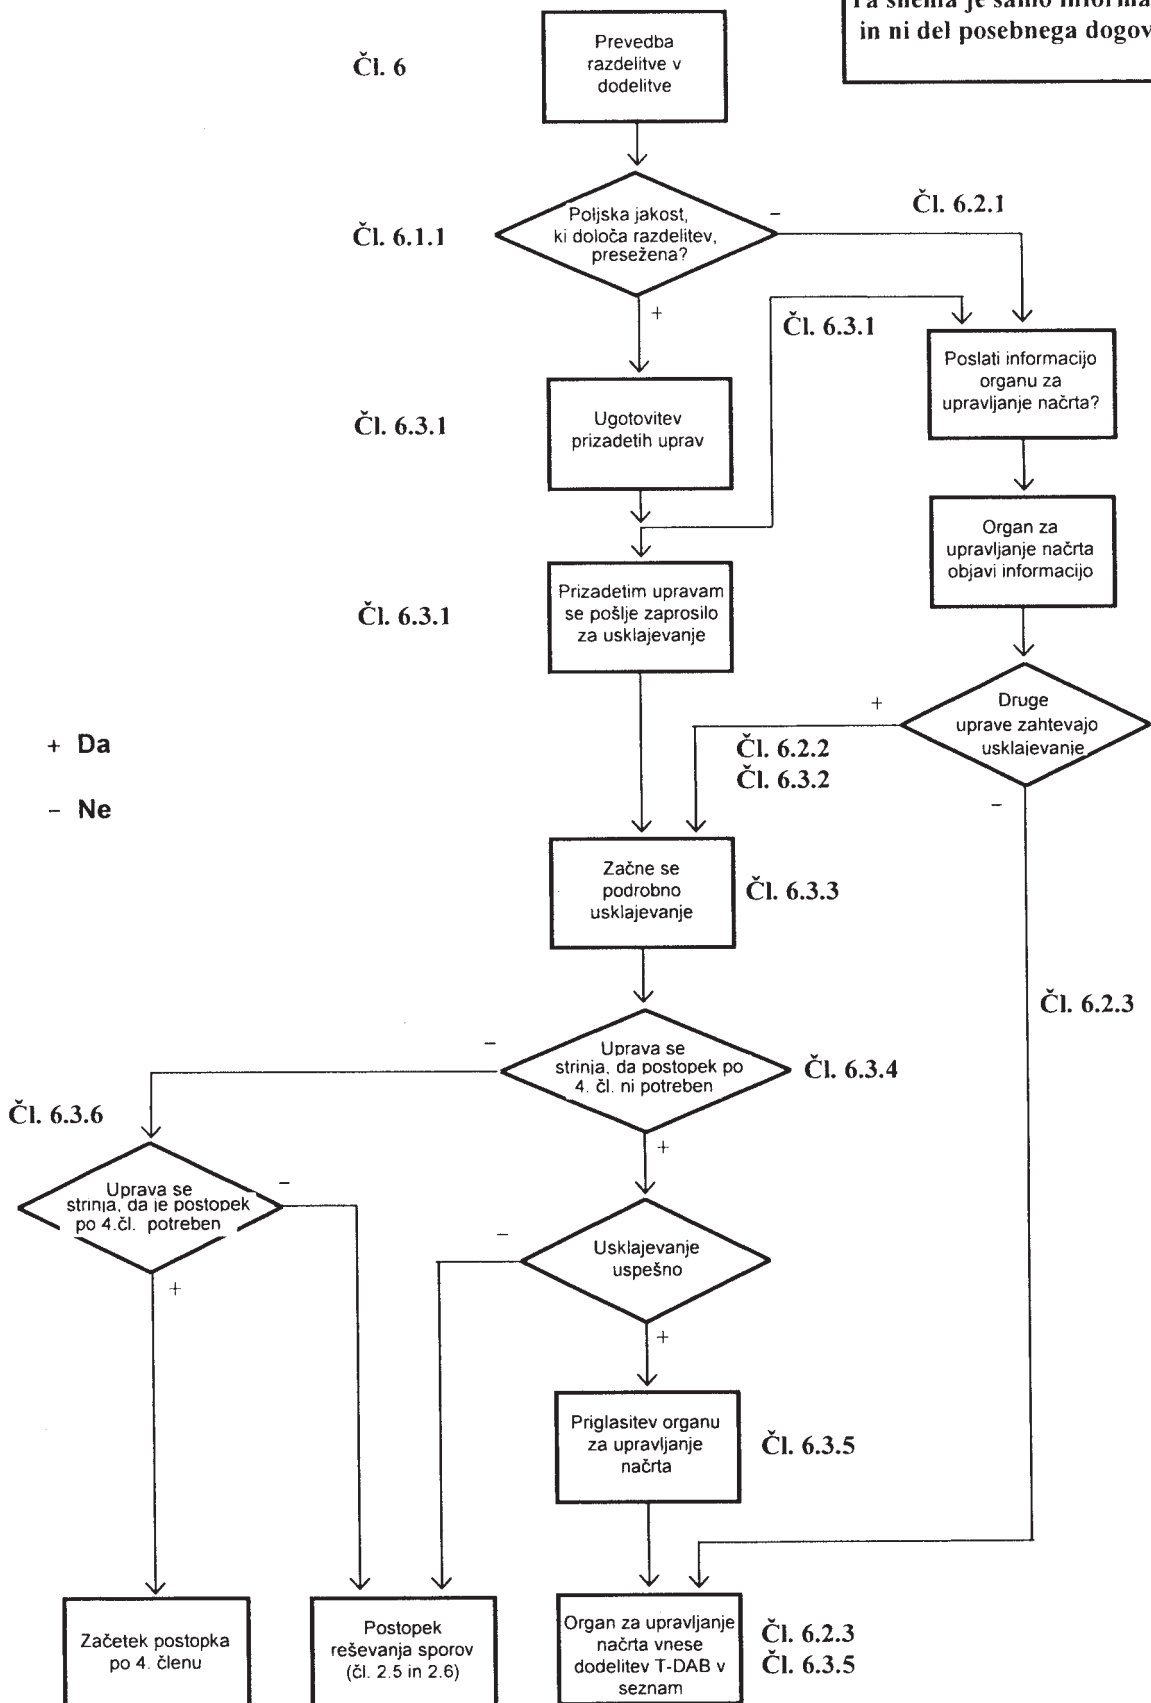

Dopolnilna informacija A

k

Posebnemu dogovoru
Evropske konference uprav za pošto in telekomunikacije (CEPT)
o uporabi radiofrekvenčnega pasu 1452–1479,5 MHz za
prizemno digitalno zvokovno radiodifuzijo (T-DAB)

Celoten seznam sporazumov za Posebni dogovor, Maastricht 2002
(vključno s sporazumi na podlagi načrta, Wiesbaden 1995)

Del A1: Seznam sporazumov, prenesenih iz dogovora, Wiesbaden 2002

314	OS	HRV88011	SVN	LA LB LC LD LE LF LG LH LI
316	OS	HRV88013	SVN	LA LB LC LD LE LF LG LH LI
320	OS	SVN00167	HRV	LA LB LC LD LE LF LG LH LI
321	OS	SVN00168	HRV	LA LB LC LD LE LF LG LH LI
327	OS	HRV00564	HRV	12D LA LB LC LD LE LF LG LH LI
329	OS	HRV00566	HRV	12D LA LB LC LD LE LF LG LH LI
332	OS	HRV88011	HRV	12D LA LB LC LD LE LF LG LH LI
334	OS	HRV88013	HRV	12D LA LB LC LD LE LF LG LH LI
335	OS	HRV88014	HRV	12D LA LB LC LD LE LF LG LH LI
336	OS	HRV88015	HRV	12D LA LB LC LD LE LF LG LH LI
337	OS	HRV88016	HRV	12D LA LB LC LD LE LF LG LH LI
387	OS	F__03163	E	LC LD LE LF LG Če Francija uvede T-DAB po 1. 1. 98
388	OS	F__03239	E	LC LD LE LF LG Če Francija uvede T-DAB po 1. 1. 98
390	OS	F__03161	E	LC LD LE LF LG Če Francija uvede T-DAB po 1. 1. 98
392	OS	F__03141	E	LC LD LE LF LG Če Francija uvede T-DAB po 1. 1. 98
397	OS	F__03262	E	LC LD LE LF LG Če Francija uvede T-DAB po 1. 1. 98
398	OS	F__03139	E	LC LD LE LF LG Če Francija uvede T-DAB po 1. 1. 98
1508	OS	D__00053	F	LA LB LE
1509	OS	D__00059	F	LA LB LC LD LE
1512	OS	D__00084	F	LA LC LD
1517	OS	AUT01009	AUT	12A LA LB LC LD LE LF LG LH LI
1518	OS	AUT01008	AUT	12A LA LB LC LD LE LF LG LH LI
1519	OS	AUT01007	AUT	12A LA LB LC LD LE LF LG LH LI
1520	OS	AUT01006	AUT	LA LB LC LD LE LF LG LH LI
1521	OS	AUT01005	AUT	12A LA LB LC LD LE LF LG LH LI
1522	OS	AUT01001	AUT	LA LB LC LD LE LF LG LH LI
1523	OS	AUT01002	AUT	12A LA LB LC LD LE LF LG LH LI
1524	OS	AUT01003	AUT	12A LA LB LC LD LE LF LG LH LI
1525	OS	AUT01004	AUT	12A LA LB LC LD LE LF LG LH LI
1731	OS	LUX00002	F	12C LB LE Potrebno usklajevanje pred začetkom uporabe razdelitve 12C. Tudi LB in LE morata biti usklajeni.

2120	OS	HNG00008	HNG	12A 12B 12C 12D 13A 13B LC LD LE LF
2121	OS	HNG00009	HNG	12A 12B 12C 12D 13A 13B LC LD LE LF
2817	OS	BEL30001	F	LB LE LF LG LH LI Za LB se obvezno zaščiti minimalna poljska jakost na povezavi F__02054 (RX 04"E45'28" 49N49'31"
2868	OS	E__00102	E	LA LB LC LD LE LF LG LH LI
2869	OS	E__00103	E	LA LB LC LD LE LF LG LH LI
2871	OS	E__00104	E	LA LB LC LD LE LF LG LH LI
2878	OS	E__00111	E	LA LB LC LD LE LF LG LH LI
2879	OS	E__00114	E	LA LB LC LD LE LF LG LH LI
2899	OS	SVN00168	SVN	12B 12C 12D LA LB LC LD LE LF
3076	OS	F__03104	BEL	LD
3209	OS	LIE00001	SUI	LB LC LD LE
3247	OS	I__00332	I	2A 2B 2C 2D 3A 3B 3C 3D 4A 4B 4C 4D 5A 5B 5C 5D 6A 6B 6C 6D 7A 7B 7C 7D 8A 8B 8C 8D 9A 9B 9C 9D 10A 10B 10C 10D 11A 11B 11C 11D 12A 12B 12C 12D 13A 13B 13C 13D 13E 13F LA LB LC LD LE LF LG LH LI
3249	OS	I__00334	I	2A 2B 2C 2D 3A 3B 3C 3D 4A 4B 4C 4D 5A 5B 5C 5D 6A 6B 6C 6D 7A 7B 7C 7D 8A 8B 8C 8D 9A 9B 9C 9D 10A 10B 10C 10D 11A 11B 11C 11D 12A 12B 12C 12D 13A 13B 13C 13D 13E 13F LA LB LC LD LE LF LG LH LI
3251	OS	I__00336	I	2A 2B 2C 2D 3A 3B 3C 3D 4A 4B 4C 4D 5A 5B 5C 5D 6A 6B 6C 6D 7A 7B 7C 7D 8A 8B 8C 8D 9A 9B 9C 9D 10A 10B 10C 10D 11A 11B 11C 11D 12A 12B 12C 12D 13A 13B 13C 13D 13E 13F LA LB LC LD LE LF LG LH LI
3266	OS	SUI00013	F	LA LB LC LD
3275	OS	F__03116	SUI	LH LI
3278	OS	F__03127	SUI	LH LI
3281	OS	F__03129	SUI	LI
3284	OS	F__03124	SUI	LA LC LD
3285	OS	F__03224	SUI	LA LC LD
3375	OS	LIE00001	AUT	LB LE LF LE se lahko uporablja po 2005.
3376	OS	LIE00002	AUT	LB LE LF LE se lahko uporablja po 2005.
3417	OS	D__00094	F	LA LC LD
3419	OS	F__03123	SUI	LA
3424	OS	SUI00012	F	LB
3427	OS	HNG00007	AUT	LB LC LD LE se lahko uporabljajo po 2005.
3444	OS	E__00107	I	LA LB LC LD LE LF LG LH LI Potrebno usklajevanje pred začetkom uporabe.
3460	OS	E__00116	E	LA LB LC LD LE LF LG LH LI
3462	OS	E__00117	E	LA LB LC LD LE LF LG LH LI
3493	OS	AUT00001	HRV	LA LB LC LD LE LF LG LH LI
3494	OS	AUT01001	HRV	LA LB LC LD LE LF LG LH LI
3495	OS	AUT01002	HRV	LA LB LC LD LE LF LG LH LI
3496	OS	AUT01003	HRV	12D LA LB LC LD LE LF LG LH LI
3497	OS	AUT01006	HRV	12D LA LB LC LD LE LF LG LH LI
3498	OS	AUT01007	HRV	12D LA LB LC LD LE LF LG LH LI
3500	OS	AUT01001	SVN	12A 12B 12C 12D LC LD F2 F3
3504	OS	AUT01005	I	12A 12B 12C 12D LA LB LC LD LE LF LG LH LI 12A, 12B, 12C, 12D v Italiji, MT deluje do 1997

3505	OS	AUT01007	I	12A 12B 12C 12D LA LB LC LD LE LF LG LH LI 12A, 12B, 12C, 12D v Italiji, MT deluje do 1997
3517	OS	D__00032	G	LA D__00032 (Spodnja Saška) moti G__00044 Amethyst A1 in G__00156 49-54-JP samo z manjšimi marginami -1,6 dB in -0,3 dB.
3519	OS	AUT01007	SUI	12A 12B 12C 12D LA LB LC LD LE LH LI F3 SB SC SD
3546	OS	D__00041	RUS	LA LB LC LD LE LF LG LH LI Zahteva nemške T-DAB D__00041 je združljiva s storitvijo XR/RUS00501 AMS_1 do RUS00504 AMS_4.
3547	OS	D__00030	RUS	LA LB LC LD LE LF LG LH LI Zahteva nemške T-DAB D__00030 je združljiva s storitvijo XR/RUS00501 AMS_1 do RUS00504 AMS_4.
3552	OS	HRV00560	HNG	12A 12B 12C 12D LA LB LC LD LE LF LG LH LI Ne pred letom 2002; če prej, je usklajevanje obvezno od primera do primera.
3655	OS	HRV00560	I	12A 12B 12C 12D LA LB LC LD LE LF LG LH LI Za 1,5 GHz je usklajevanje obvezno od primera do primera.
3716	OS	D__00023	G	LG D__00023//G__00356 Camelot B margina na bloku LG -1,6 dB
3717	OS	MCO00001	I	LA LB LC LD LE LF LG LH LI Potrebno usklajevanje pred začetkom uporabe.
3718	OS	MCO00002	I	LA LB LC LD LE LF LG LH LI Potrebno usklajevanje pred začetkom uporabe.
3734	OS	HOL05006	G	LA
3736	OS	BUL10003	GRC	LA LB LC LD LE LF LH Potrebno usklajevanje pred začetkom uporabe.
3737	OS	BUL10004	GRC	LA LB LC LD LE LF LH Potrebno usklajevanje pred začetkom uporabe.
3738	OS	BUL10005	GRC	LA LB LC LD LE LF LH Potrebno usklajevanje pred začetkom uporabe.
3746	OS	AUT00001	AUT	11A 11B 11C 11D LE LF LG LH LI
3808	OS	F__03102	F	11A 11B 11C 11D LE LF LG LH LI
3810	OS	F__03104	F	11A 11B 11C 11D LE LF LG LH LI
3812	OS	F__03106	F	11A 11B 11C 11D LE LF LG LH LI
3813	OS	F__03107	F	11A 11B 11C 11D LE LF LG LH LI
3814	OS	F__03108	F	11A 11B 11C 11D LE LF LG LH LI
3816	OS	F__03110	F	11A 11B 11C 11D LE LF LG LH LI
3818	OS	F__03112	F	11A 11B 11C 11D LE LF LG LH LI
3819	OS	F__03113	F	11A 11B 11C 11D LE LF LG LH LI
3820	OS	F__03114	F	11A 11B 11C 11D LE LF LG LH LI
3822	OS	F__03116	F	11A 11B 11C 11D LE LF LG LH LI
3823	OS	F__03117	F	11A 11B 11C 11D LE LF LG LH LI
3825	OS	F__03119	F	11A 11B 11C 11D LE LF LG LH LI
3827	OS	F__03121	F	11A 11B 11C 11D LE LF LG LH LI
3829	OS	F__03123	F	11A 11B 11C 11D LE LF LG LH LI
3830	OS	F__03124	F	11A 11B 11C 11D LE LF LG LH LI
3831	OS	F__03125	F	11A 11B 11C 11D LE LF LG LH LI
3832	OS	F__03126	F	11A 11B 11C 11D LE LF LG LH LI
3834	OS	F__03128	F	11A 11B 11C 11D LE LF LG LH LI
3836	OS	F__03130	F	11A 11B 11C 11D LE LF LG LH LI
3837	OS	F__03131	F	11A 11B 11C 11D LE LF LG LH LI
3838	OS	F__03132	F	11A 11B 11C 11D LE LF LG LH LI

3839	OS	F__03133	F	11A 11B 11C 11D LE LF LG LH LI
3840	OS	F__03134	F	11A 11B 11C 11D LE LF LG LH LI
3841	OS	F__03135	F	11A 11B 11C 11D LE LF LG LH LI
3842	OS	F__03136	F	11A 11B 11C 11D LE LF LG LH LI
3843	OS	F__03137	F	11A 11B 11C 11D LE LF LG LH LI
3844	OS	F__03138	F	11A 11B 11C 11D LE LF LG LH LI
3846	OS	F__03140	F	11A 11B 11C 11D LE LF LG LH LI
3847	OS	F__03141	F	11A 11B 11C 11D LE LF LG LH LI
3854	OS	F__03148	F	11A 11B 11C 11D LE LF LG LH LI
3857	OS	F__03151	F	11A 11B 11C 11D LE LF LG LH LI
3860	OS	F__03154	F	11A 11B 11C 11D LE LF LG LH LI
3862	OS	F__03156	F	11A 11B 11C 11D LE LF LG LH LI
3865	OS	F__03159	F	11A 11B 11C 11D LE LF LG LH LI
3866	OS	F__03160	F	11A 11B 11C 11D LE LF LG LH LI
3867	OS	F__03161	F	11A 11B 11C 11D LE LF LG LH LI
3870	OS	F__03164	F	11A 11B 11C 11D LE LF LG LH LI
3871	OS	F__03201	F	11A 11B 11C 11D LE LF LG LH LI
3872	OS	F__03202	F	11A 11B 11C 11D LE LF LG LH LI
3875	OS	F__03205	F	11A 11B 11C 11D LE LF LG LH LI
3877	OS	F__03207	F	11A 11B 11C 11D LE LF LG LH LI
3880	OS	F__03210	F	11A 11B 11C 11D LE LF LG LH LI
3881	OS	F__03211	F	11A 11B 11C 11D LE LF LG LH LI
3883	OS	F__03213	F	11A 11B 11C 11D LE LF LG LH LI
3886	OS	F__03216	F	11A 11B 11C 11D LE LF LG LH LI
3887	OS	F__03217	F	11A 11B 11C 11D LE LF LG LH LI
3888	OS	F__03218	F	11A 11B 11C 11D LE LF LG LH LI
3890	OS	F__03220	F	11A 11B 11C 11D LE LF LG LH LI
3891	OS	F__03221	F	11A 11B 11C 11D LE LF LG LH LI
3894	OS	F__03224	F	11A 11B 11C 11D LE LF LG LH LI
3896	OS	F__03226	F	11A 11B 11C 11D LE LF LG LH LI
3900	OS	F__03230	F	11A 11B 11C 11D LE LF LG LH LI
3901	OS	F__03231	F	11A 11B 11C 11D LE LF LG LH LI
3903	OS	F__03233	F	11A 11B 11C 11D LE LF LG LH LI
3906	OS	F__03236	F	11A 11B 11C 11D LE LF LG LH LI
3917	OS	F__03247	F	11A 11B 11C 11D LE LF LG LH LI
3918	OS	F__03248	F	11A 11B 11C 11D LE LF LG LH LI
3923	OS	F__03253	F	11A 11B 11C 11D LE LF LG LH LI
3935	OS	MCO00001	F	11A 11B 11C 11D LE LF LG LH LI MCO mora s Francijo uskladiti uporabo LA LB LC LD in ne sme teh blokov uporabiti pred 1998.
3942	OS	GRC00002	GRC	12A 12B 12C 12D LA LB LC LD LE LF LG LH LI Interno motenje se ne upošteva.
3947	OS	GRC00007	GRC	12A 12B 12C 12D LA LB LC LD LE LF LG LH LI Interno motenje se ne upošteva.
3948	OS	GRC00008	GRC	12A 12B 12C 12D LA LB LC LD LE LF LG LH LI Interno motenje se ne upošteva.

3949	OS	GRC00009	GRC	12A 12B 12C 12D LA LB LC LD LE LF LG LH LI Interno motenje se ne upošteva.
4119	OS	SUI00006	SUI	LA LB LC LD LE LF LG LH LI
4120	OS	SUI00007	SUI	LA LB LC LD LE LF LG LH LI
4122	OS	SUI00009	SUI	LA LB LC LD LE LF LG LH LI
4123	OS	SUI00010	SUI	LA LB LC LD LE LF LG LH LI
4124	OS	SUI00011	SUI	LA LB LC LD LE LF LG LH LI
4125	OS	SUI00012	SUI	LA LB LC LD LE LF LG LH LI
4126	OS	SUI00013	SUI	LA LB LC LD LE LF LG LH LI
4128	OS	SUI00015	SUI	LA LB LC LD LE LF LG LH LI
4129	OS	SUI00016	SUI	LA LB LC LD LE LF LG LH LI
4130	OS	SUI00017	SUI	LA LB LC LD LE LF LG LH LI
4131	OS	SUI00018	SUI	LA LB LC LD LE LF LG LH LI
4132	OS	SUI00019	SUI	LA LB LC LD LE LF LG LH LI
4133	OS	SUI00020	SUI	LA LB LC LD LE LF LG LH LI
4134	OS	SUI00021	SUI	LA LB LC LD LE LF LG LH LI
4137	OS	SUI00024	SUI	LA LB LC LD LE LF LG LH LI
4139	OS	SUI00026	SUI	LA LB LC LD LE LF LG LH LI
4140	OS	SUI00027	SUI	LA LB LC LD LE LF LG LH LI
4141	OS	SUI00028	SUI	LA LB LC LD LE LF LG LH LI
4142	OS	SUI00029	SUI	LA LB LC LD LE LF LG LH LI
4143	OS	SUI00030	SUI	LA LB LC LD LE LF LG LH LI
4144	OS	SUI00031	SUI	LA LB LC LD LE LF LG LH LI
4145	OS	SUI00032	SUI	LA LB LC LD LE LF LG LH LI
4146	OS	SUI00033	SUI	LA LB LC LD LE LF LG LH LI
4147	OS	SUI00034	SUI	LA LB LC LD LE LF LG LH LI
4148	OS	SUI00035	SUI	LA LB LC LD LE LF LG LH LI
4149	OS	SUI00036	SUI	LA LB LC LD LE LF LG LH LI
4150	OS	SUI00037	SUI	LA LB LC LD LE LF LG LH LI
4151	OS	SUI00038	SUI	LA LB LC LD LE LF LG LH LI
4426	OS	F__03251	I	LE LF LG LH LI Potrebno usklajevanje pred začetkom uporabe.
4467	OS	I__00325	F	LA LB LC LD LE LF LG LH LI
4469	OS	I__00328	F	LA LB LC LD LE LF LG LH LI
4470	OS	I__00329	F	LA LB LC LD LE LF LG LH LI
4479	OS	I__00335	GRC	LA LB LC LD LE LF LG LH LI
4490	OS	D__00094	SUI	LA LE BW13 /SUI30305 -2,9 , 30306 -2,9 , 30315 -3,5 , 30316 -3,5
4493	OS	D__00092	SUI	LI BW11/SUI500058 FIX41 -0,4 dB ,SUI50060 FIX -1,3 dB
4523	OS	D__00116	SUI	LI SUI50058 FIX 41 -7,2 dB
4574	OS	I__00319	HRV	12A 12B 12C 12D LA LB LC LD LE LF LG LI (1,5 GHz) Obvezno usklajevanje od primera do primera.
4575	OS	I__00320	HRV	12A 12B 12C 12D LA LB LC LD LE LF LG LI (1,5 GHz) Obvezno usklajevanje od primera do primera.
4576	OS	I__00321	HRV	12A 12B 12C 12D LA LB LC LD LE LF LG LH LI (1,5 GHz) Obvezno usklajevanje od primera do primera.

4577	OS	I__00322	HRV	12A 12B 12C 12D LA LB LC LD LE LF LG LH LI (1,5 GHz) Obvezno usklajevanje od primera do primera.
4578	OS	I__00323	HRV	12A 12B 12C 12D LA LB LC LD LE LF LG LH LI (1,5 GHz) Obvezno usklajevanje od primera do primera.
4579	OS	I__00324	HRV	12A 12B 12C 12D LA LB LC LD LE LF LG LH LI (1,5 GHz) Obvezno usklajevanje od primera do primera.
4580	OS	I__00325	HRV	12A 12B 12C 12D LA LB LC LD LE LF LG LH LI (1,5 GHz) Obvezno usklajevanje od primera do primera.
4581	OS	I__00326	HRV	12A 12B 12C 12D LA LB LC LD LE LF LG LH LI (1,5 GHz) Obvezno usklajevanje od primera do primera.
4582	OS	I__00327	HRV	12A 12B 12C 12D LA LB LC LD LE LF LG LH LI (1,5 GHz) Obvezno usklajevanje od primera do primera.
4583	OS	I__00328	HRV	12A 12B 12C 12D LA LB LC LD LE LF LG LH LI (1,5 GHz) Obvezno usklajevanje od primera do primera.
4584	OS	I__00329	HRV	12A 12B 12C 12D LA LB LC LD LE LF LG LH LI (1,5 GHz) Obvezno usklajevanje od primera do primera.
4585	OS	I__00330	HRV	12A 12B 12C 12D LA LB LC LD LE LF LG LH LI (1,5 GHz) Obvezno usklajevanje od primera do primera.
4586	OS	I__00331	HRV	12A 12B 12C 12D LA LB LC LD LE LF LG LH LI (1,5 GHz) Obvezno usklajevanje od primera do primera.
4587	OS	I__00332	HRV	12A 12B 12C 12D LA LB LC LD LE LF LG LH LI (1,5 GHz) Obvezno usklajevanje od primera do primera.
4588	OS	I__00333	HRV	12A 12B 12C 12D LA LB LC LD LE LF LG LH LI (1,5 GHz) Obvezno usklajevanje od primera do primera.
4589	OS	I__00334	HRV	12A 12B 12C 12D LA LB LC LD LE LF LG LH LI (1,5 GHz) Obvezno usklajevanje od primera do primera.
4590	OS	I__00335	HRV	12A 12B 12C 12D LA LB LC LD LE LF LG LH LI (1,5 GHz) Obvezno usklajevanje od primera do primera.
4674	OS	SMR00002	HRV	LA LB LC LD LE LF LG LH LI LG* samo po 2005.
4917	OS	BEL20006	G	LF LH LI
4918	OS	BEL20004	G	LC LF LH LI
4919	OS	BEL10005	G	LB Slabljenje 6 dB, ki ga v smeri prizadetih povezav v UK povzročajo belgijske T-DAB.
4920	OS	I__00327	F	LA LB LC LD LE LF LG LH LI Potrebno usklajevanje pred začetkom uporabe.
4921	OS	I__00337	F	LA LB LC LD LE LF LG LH LI Potrebno usklajevanje pred začetkom uporabe.
4927	OS	SUI00024	F	LA LC LD
4928	OS	SUI00027	F	LA LC LD
4939	OS	F__03113	SUI	LC LD Pod pogojem, da francoska T-DAB ne moti švicarskih fiksni povezav.
4942	OS	F__03211	SUI	LC LD Pod pogojem, da francoska T-DAB ne moti švicarskih fiksni povezav.
4956	OS	D__00124	G	LI D__00124 Spodnja Saška 2S moti storitev G__00371 49-26-BH z margino -11,5 dB na LI. UK se strinja pod pogojem, da se opravi nadaljnja analiza in posledična potrditev.
4957	OS	F__03202	G	LA Pod pogojem, da Francija in UK skleneta sporazumom o uskladitvi.
4989	OS	BEL20005	G	LI

Del A2: Seznam sporazumov z zasedanja o načrtovanju, Maastricht 2002

T-DAB in T-DAB

T-DAB_0001	Uprava AVSTRIJE se strinja, da lahko zahtevi T-DAB AUT01010 in AUT01042 souporabljata en blok DAB.
T-DAB_0002	Uprava AVSTRIJE se strinja, da lahko zahtevi T-DAB AUT01020 in AUT01019 souporabljata en blok DAB.
T-DAB_0003	Uprava AVSTRIJE se strinja, da lahko zahtevi T-DAB AUT01020 in AUT01034 souporabljata en blok DAB.
T-DAB_0004	Uprava AVSTRIJE se strinja, da lahko zahtevi T-DAB AUT01020 in AUT01036 souporabljata en blok DAB.
T-DAB_0005	Upravi AVSTRIJE in SLOVENIJE se strinjata, da lahko zahtevi T-DAB AUT01021 in SVN10003 souporabljata en blok T-DAB. Uporaba (prevedba v dodelitve) obeh razdelitev bo taka, da izračunane poljske jakosti ene razdelitve na katerikoli mejni preskusni točki druge strani ne bodo dosegale navedene dopustne soblokovne moteče poljske jakosti prizadete razdelitve ob upoštevanju geografskih podatkov.
T-DAB_0006	Uprava AVSTRIJE se strinja, da lahko zahtevi T-DAB AUT01024 in AUT01046 souporabljata en blok DAB.
T-DAB_0007	Uprava AVSTRIJE se strinja, da lahko zahtevi T-DAB AUT01030 in AUT01039 souporabljata en blok DAB.
T-DAB_0008	Uprava AVSTRIJE se strinja, da lahko zahtevi T-DAB AUT01034 in AUT01036 souporabljata en blok DAB.
T-DAB_0009	Uprava AVSTRIJE se strinja, da lahko zahtevi T-DAB AUT01039 in AUT01030 souporabljata en blok DAB.
T-DAB_0010	Upravi AVSTRIJE in ČEŠKE REPUBLIKE se strinjata, da lahko zahtevi T-DAB AUT01040 in CZE00005 souporabljata en blok T-DAB. Uporaba (prevedba v dodelitve) obeh razdelitev bo taka, da izračunane poljske jakosti ene razdelitve na katerikoli mejni preskusni točki druge strani ne bodo dosegale navedene dopustne soblokovne moteče poljske jakosti prizadete razdelitve ob upoštevanju geografskih podatkov.
T-DAB_0011	Uprava ČEŠKE REPUBLIKE se strinja, da lahko zahtevi T-DAB CZE00012 in CZE00010 souporabljata en blok DAB.
T-DAB_0012	Uprava ČEŠKE REPUBLIKE se strinja, da lahko zahtevi T-DAB CZE00018 in CZE00006 souporabljata en blok DAB.
T-DAB_0013	Uprava ČEŠKE REPUBLIKE se strinja, da lahko zahtevi T-DAB CZE00028 in CZE00015 souporabljata en blok DAB.
T-DAB_0014	Uprava DANSKE se strinja, da lahko zahtevi T-DAB DNK20013 in DNK20038 souporabljata en blok DAB.
T-DAB_0015	Uprava DANSKE se strinja, da lahko zahtevi T-DAB DNK20014 in DNK20021 souporabljata en blok DAB.
T-DAB_0016	Uprava DANSKE se strinja, da lahko zahtevi T-DAB DNK20015 in DNK20029 souporabljata en blok DAB.
T-DAB_0017	Upravi DANSKE in NEMČIJE sta se sporazumeli, da lahko zahtevi DNK20016 in D__30004 souporabljata en blok T-DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0018	Uprava DANSKE se strinja, da lahko zahtevi T-DAB DNK20022 in DNK20032 souporabljata en blok DAB.
T-DAB_0019	Uprava DANSKE se strinja, da lahko zahtevi T-DAB DNK20024 in DNK20012 souporabljata en blok DAB.
T-DAB_0020	Upravi DANSKE in NEMČIJE sta se sporazumeli, da lahko zahtevi T-DAB DNK20024 in D__30007 souporabljata en blok T-DAB. Razdelitev DNK20024, ki uporablja blok LM, ne sme na zahtevanih preskusnih točkah razdelitve D__30007 proizvajati več kot 43 dB(μ V/m), računano kot PSM za 1 % časa. Če je ta vrednost presežena, je potrebno usklajevanje.
T-DAB_0021	Uprava DANSKE se strinja, da lahko zahtevi T-DAB DNK20025 in DNK20033 souporabljata en blok DAB.
T-DAB_0022	Upravi DANSKE in NEMČIJE sta se sporazumeli, da lahko zahtevi T-DAB DNK20026 in D__30097 souporabljata en blok DAB.
T-DAB_0023	Uprava DANSKE se strinja, da lahko zahtevi T-DAB DNK20029 in DNK20015 souporabljata en blok DAB.
T-DAB_0024	Uprava DANSKE se strinja, da lahko zahtevi T-DAB DNK20032 in DNK20051 souporabljata en blok DAB.
T-DAB_0025	Uprava DANSKE se strinja, da lahko zahtevi T-DAB DNK20033 in DNK20025 souporabljata en blok DAB.
T-DAB_0026	Uprava DANSKE se strinja, da lahko zahtevi T-DAB DNK20034 in DNK20052 souporabljata en blok DAB.
T-DAB_0027	Uprava DANSKE se strinja, da lahko zahtevi T-DAB DNK20035 in DNK21718 souporabljata en blok DAB.
T-DAB_0028	Uprava DANSKE se strinja, da lahko zahtevi T-DAB DNK20038 in DNK20040 souporabljata en blok DAB.
T-DAB_0029	Uprava DANSKE se strinja, da lahko zahtevi T-DAB DNK20040 in DNK20038 souporabljata en blok DAB.
T-DAB_0030	Uprava DANSKE se strinja, da lahko zahtevi T-DAB DNK20050 in DNK20035 souporabljata en blok DAB.
T-DAB_0031	Uprava DANSKE se strinja, da lahko zahtevi T-DAB DNK20051 in DNK20032 souporabljata en blok DAB.
T-DAB_0032	Upravi DANSKE in NORVEŠKE sta se sporazumeli, da lahko zahtevi T-DAB DNK20052 in NOR00015 souporabljata en blok T-DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih dodelitev.
T-DAB_0033	Upravi DANSKE in NEMČIJE sta se sporazumeli, da lahko zahtevi T-DAB DNK21718 in D__30096 souporabljata en blok T-DAB. Razdelitev DNK21718, ki uporablja blok LN, ne sme proizvajati več kot 43 dB(μ V/m) na zahtevanih preskusnih točkah razdelitve __30096, izračunane kot PSM za 1 % časa. Če je ta vrednost presežena, je potrebno usklajevanje.
T-DAB_0034	Upravi DANSKE in POLJSKE sta se sporazumeli, da lahko zahtevi T-DAB DNK21718 in POL30016 souporabljata en blok T-DAB. Razdelitev DNK21718 lahko uporablja blok LN pod pogojem, da je celotno odhodno motenje (vrednost PSM za 1 % časa) iz DNK21718 v smeri poljske razdelitve POL30016 zmanjšano za 10 dB v primerjavi z vrednostjo PSM, pridobljeno s standardnim izračunom odhodnega motenja z uporabo referenčnega omrežja 2.

T-DAB_0035	Upravi NEMČIJE in DANSKE sta se sporazumeli, da lahko zahtevi T-DAB D__30004 in DNK20016 souporabljata en blok T-DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih dodelitev.
T-DAB_0036	Uprava NEMČIJE se strinja, da lahko zahtevi T-DAB D__30027 in D__30030 souporabljata en blok DAB.
T-DAB_0037	Uprava NEMČIJE se strinja, da lahko zahtevi T-DAB D__30030 in D__30027 souporabljata en blok DAB.
T-DAB_0038	Uprava NEMČIJE se strinja, da lahko zahtevi T-DAB D__30037 in D__30104 souporabljata en blok DAB.
T-DAB_0039	Uprava NEMČIJE se strinja, da lahko zahtevi T-DAB D__30097 in D__30005 souporabljata en blok DAB.
T-DAB_0040	Upravi NEMČIJE in ŠVEDSKE sta se sporazumeli, da lahko zahtevi T-DAB D__30097 in S__00016 souporabljata en blok T-DAB. Kumulativna moteča moč oddajnikov realnega omrežja razdelitve D__30097, prevedene v dodelitve, ne sme preseči vrednosti 41 dB(μV/m) na mejnih preskusnih točkah, ki opisujejo razdelitev S__00016, izračunano za 1-odstotno časovno verjetnost moteče poljske jakosti. Če se namerava ta vrednost preseči, je treba opraviti usklajevanje.
T-DAB_0041	Upravi NEMČIJE in DANSKE sta se sporazumeli, da lahko zahtevi T-DAB D__30098 in DNK20027 souporabljata en blok T-DAB. Razdelitev D__30098, ki uporablja blok LO, ne sme povzročiti več kot 41 dB(μV/m) na zahtevanih preskusnih točkah razdelitve DNK20027, računano kot vrednost PSM za 1 % časa. Če je ta vrednost presežena, je potrebno usklajevanje.
T-DAB_0042	Upravi NEMČIJE in DANSKE sta se sporazumeli, da lahko zahtevi T-DAB D__30098 in DNK20016 souporabljata en blok T-DAB. Razdelitev DNK20016, ki uporablja blok LO, ne sme povzročiti več kot 41 dB(μV/m) na zahtevanih preskusnih točkah razdelitve D__30098, računano kot vrednost PSM za 1 % časa. Če je ta vrednost presežena, je potrebno usklajevanje. Razdelitev D__30098, ki uporablja blok LO, ne sme povzročiti več kot 43 dB(μV/m) na zahtevanih preskusnih točkah razdelitve DNK20016, računano kot vrednost PSM za 1 % časa. Če je ta vrednost presežena, je potrebno usklajevanje.
T-DAB_0043	Upravi NEMČIJE in ŠVEDSKE sta se sporazumeli, da lahko zahtevi T-DAB D__30098 in S__00010 souporabljata en blok T-DAB in lahko souporabljata frekvenčni blok LO storitve T-DAB pod pogojem, da Nemčija uskladi s Švedsko vse dodelitve in vsako posebej znotraj 35 km od nemške obalne črte.
T-DAB_0044	Uprava NEMČIJE se strinja, da lahko zahtevi T-DAB D__30104 in D__30037 souporabljata en blok DAB.
T-DAB_0045	Uprava NEMČIJE se strinja, da lahko zahtevi T-DAB D__30104 in D__30053 souporabljata en blok DAB.
T-DAB_0046	Uprava NEMČIJE se strinja, da lahko zahtevi T-DAB D__30106 in D__30108 souporabljata en blok DAB.
T-DAB_0047	Uprava NEMČIJE se strinja, da lahko zahtevi T-DAB D__30108 in D__30106 souporabljata en blok DAB.
T-DAB_0048	Uprava ŠPANIJE se strinja, da lahko zahtevi T-DAB E__70148 in E__70239 souporabljata en blok DAB.
T-DAB_0049	Uprava ŠPANIJE se strinja, da lahko zahtevi T-DAB E__70239 in E__70148 souporabljata en blok DAB.
T-DAB_0050	Upravi ŠPANIJE in FRANCIJE sta se sporazumeli, da lahko zahtevi T-DAB E__70339 in F__03366 souporabljata en blok T-DAB. Uporaba (prevedba v dodelitve) obeh razdelitev bo taka, da izračunana poljska jakost na katerikoli mejni preskusni točki ene ali druge razdelitve ne bo presegala vrednosti 41 dB(μV/m).
T-DAB_0051	Upravi ŠPANIJE in FRANCIJE sta se sporazumeli, da lahko zahtevi T-DAB E__70348 in F__03367 souporabljata en blok T-DAB. Uporaba (prevedba v dodelitve) obeh razdelitev bo taka, da izračunana poljska jakost na katerikoli mejni preskusni točki ene ali druge razdelitve ne bo presegala vrednosti 41 dB(μV/m).
T-DAB_0052	Upravi ŠPANIJE in FRANCIJE sta se sporazumeli, da lahko zahtevi T-DAB E__70420 in F__03366 souporabljata en blok T-DAB. Uporaba (prevedba v dodelitve) obeh razdelitev bo taka, da izračunana poljska jakost na katerikoli mejni preskusni točki ene ali druge razdelitve ne bo presegala vrednosti 41 dB(μV/m).
T-DAB_0053	Uprava ŠPANIJE se strinja, da lahko zahtevi T-DAB E__70443 in E__70808 souporabljata en blok DAB.
T-DAB_0054	Upravi ŠPANIJE in FRANCIJE sta se sporazumeli, da lahko zahtevi T-DAB E__70631 in F__03368 souporabljata en blok T-DAB. Uporaba (prevedba v dodelitve) obeh razdelitev bo taka, da izračunana poljska jakost na katerikoli mejni preskusni točki ene ali druge razdelitve ne bo presegala vrednosti 41 dB(μV/m).
T-DAB_0055	Upravi ŠPANIJE in FRANCIJE sta se sporazumeli, da lahko zahtevi T-DAB E__70648 in F__03161 souporabljata en blok T-DAB. Uporaba (prevedba v dodelitve) obeh razdelitev bo taka, da izračunane poljske jakosti na katerikoli mejni preskusni točki ene ali druge razdelitve ne bodo dosegale navedene dopustne soblokovne moteče poljske jakosti prizadete razdelitve.
T-DAB_0056	Upravi ŠPANIJE in FRANCIJE sta se sporazumeli, da lahko zahtevi T-DAB E__70707 in F__03365 souporabljata en blok T-DAB. Uporaba (prevedba v dodelitve) obeh razdelitev bo taka, da izračunana poljska jakost na katerikoli mejni preskusni točki ene ali druge razdelitve ne bo presegala vrednosti 41 dB(μV/m).
T-DAB_0057	Uprava ŠPANIJE se strinja, da lahko zahtevi T-DAB E__70807 in E__70843 souporabljata en blok DAB.
T-DAB_0058	Uprava ŠPANIJE se strinja, da lahko zahtevi T-DAB E__71407 in E__70212 souporabljata en blok DAB.
T-DAB_0059	Uprava ŠPANIJE se strinja, da lahko zahtevi T-DAB E__71607 in E__70117 souporabljata en blok DAB.
T-DAB_0060	Upravi FINSKE in LATVIJE sta se sporazumeli, da lahko zahtevi T-DAB FIN40002 in LVA30006 souporabljata en blok T-DAB. Uporaba (prevedba v dodelitve) obeh razdelitev bo taka, da izračunana poljska jakost na katerikoli mejni preskusni točki ene ali druge razdelitve ne bo presegala vrednosti 41 dB(μV/m).
T-DAB_0061	Uprava FRANCIJE se strinja, da lahko zahtevi T-DAB F__03334 in F__03332 souporabljata en blok DAB.
T-DAB_0062	Upravi FRANCIJE in ITALIJE sta se sporazumeli, da lahko zahtevi T-DAB F__03334 in I__09042 souporabljata en blok T-DAB. Uporaba (prevedba v dodelitve) obeh razdelitev bo taka, da izračunana poljska jakost na katerikoli mejni preskusni točki ene ali druge razdelitve ne bo presegala vrednosti 41 dB(μV/m).

T-DAB_0063	Upravi FRANCIJE in ITALIJE sta se sporazumeli, da lahko zahtevi T-DAB F__03335 in I__09042 souporabljata en blok T-DAB. Uporaba (prevedba v dodelitve) obeh razdelitev bo taka, da izračunana poljska jakost na katerikoli mejni preskusni točki ene ali druge razdelitve ne bo presegala vrednosti 41 dB(μ V/m).
T-DAB_0064	Uprava FRANCIJE se strinja, da lahko zahtevi T-DAB F__03335 in F__03365 souporabljata en blok DAB.
T-DAB_0065	Uprava FRANCIJE se strinja, da lahko zahtevi T-DAB F__03335 in F__03334 souporabljata en blok DAB.
T-DAB_0066	Upravi FRANCIJE in NIZOZEMSKE sta se sporazumeli, da lahko zahtevi T-DAB F__03350 in HOL30713 souporabljata en blok T-DAB. Uporaba (prevedba v dodelitve) obeh razdelitev bo taka, da izračunana poljska jakost na katerikoli mejni preskusni točki ene ali druge razdelitve ne bo presegala vrednosti 41 dB(μ V/m).
T-DAB_0067	Upravi FRANCIJE in NIZOZEMSKE sta se sporazumeli, da lahko zahtevi T-DAB F__03350 in HOL30807 souporabljata en blok T-DAB. Uporaba (prevedba v dodelitve) obeh razdelitev bo taka, da izračunana poljska jakost na katerikoli mejni preskusni točki ene ali druge razdelitve ne bo presegala vrednosti 41 dB(μ V/m).
T-DAB_0068	Upravi FRANCIJE in NIZOZEMSKE sta se sporazumeli, da lahko zahtevi T-DAB F__03350 in HOL30904 souporabljata en blok T-DAB. Uporaba (prevedba v dodelitve) obeh razdelitev bo taka, da izračunana poljska jakost na katerikoli mejni preskusni točki ene ali druge razdelitve ne bo presegala vrednosti 41 dB(μ V/m).
T-DAB_0069	Upravi FRANCIJE in ŠPANIJE sta se sporazumeli, da lahko zahtevi T-DAB F__03336 in E__71307 souporabljata en blok T-DAB. Uporaba (prevedba v dodelitve) obeh razdelitev bo taka, da izračunana poljska jakost na katerikoli mejni preskusni točki ene ali druge razdelitve ne bo presegala vrednosti 41 dB(μ V/m).
T-DAB_0070	Upravi FRANCIJE in ŠPANIJE sta se sporazumeli, da lahko zahtevi T-DAB F__03340 in E__70333 souporabljata en blok T-DAB. Uporaba (prevedba v dodelitve) obeh razdelitev bo taka, da izračunana poljska jakost na katerikoli mejni preskusni točki ene ali druge razdelitve ne bo presegala vrednosti 41 dB(μ V/m).
T-DAB_0071	Upravi FRANCIJE in ZDRUŽENEGA KRALJESTVA sta se sporazumeli, da lahko zahtevi T-DAB F__03344 in G__00001 souporabljata en blok T-DAB. Uporaba (prevedba v dodelitve) obeh razdelitev bo taka, da izračunana poljska jakost na katerikoli mejni preskusni točki ene ali druge razdelitve ne bo presegala vrednosti 41 dB(μ V/m).
T-DAB_0072	Uprava FRANCIJE se strinja, da lahko zahtevi T-DAB F__03347 in F__03302 souporabljata en blok DAB.
T-DAB_0073	Uprava FRANCIJE se strinja, da lahko zahtevi T-DAB F__03349 in F__03306 souporabljata en blok DAB.
T-DAB_0074	Uprava FRANCIJE se strinja, da lahko zahtevi T-DAB F__03349 in F__03346 souporabljata en blok DAB.
T-DAB_0075	Uprava GRČIJE se strinja, da lahko zahtevi T-DAB GRC30009 in GRC30007 souporabljata en blok DAB.
T-DAB_0076	Uprava GRČIJE se strinja, da lahko zahtevi T-DAB GRC30009 in GRC30036 souporabljata en blok DAB.
T-DAB_0077	Uprava GRČIJE se strinja, da lahko zahtevi T-DAB GRC30011 in GRC30003 souporabljata en blok DAB.
T-DAB_0078	Uprava GRČIJE se strinja, da lahko zahtevi T-DAB GRC30011 in GRC30033 souporabljata en blok DAB.
T-DAB_0079	Uprava GRČIJE se strinja, da lahko zahtevi T-DAB GRC30011 in GRC30037 souporabljata en blok DAB.
T-DAB_0080	Uprava GRČIJE se strinja, da lahko zahtevi T-DAB GRC30011 in GRC30059 souporabljata en blok DAB.
T-DAB_0081	Uprava GRČIJE se strinja, da lahko zahtevi T-DAB GRC30014 in GRC30025 souporabljata en blok DAB.
T-DAB_0082	Uprava GRČIJE se strinja, da lahko zahtevi T-DAB GRC30014 in GRC30045 souporabljata en blok DAB.
T-DAB_0083	Uprava GRČIJE se strinja, da lahko zahtevi T-DAB GRC30014 in GRC30056 souporabljata en blok DAB.
T-DAB_0084	Uprava GRČIJE se strinja, da lahko zahtevi T-DAB GRC30029 in GRC30006 souporabljata en blok DAB.
T-DAB_0085	Uprava GRČIJE se strinja, da lahko zahtevi T-DAB GRC30029 in GRC30015 souporabljata en blok DAB.
T-DAB_0086	Uprava GRČIJE se strinja, da lahko zahtevi T-DAB GRC30038 in GRC30008 souporabljata en blok DAB.
T-DAB_0087	Uprava GRČIJE se strinja, da lahko zahtevi T-DAB GRC30051 in GRC30050 souporabljata en blok DAB.
T-DAB_0088	Upravi ZDRUŽENEGA KRALJESTVA in FRANCIJE sta se sporazumeli, da lahko zahtevi T-DAB G__00001 in F__03344 souporabljata en blok T-DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0089	Uprava ZDRUŽENEGA KRALJESTVA se strinja, da lahko zahtevi T-DAB G__00005 in G__00094 souporabljata en blok DAB.
T-DAB_0090	Uprava ZDRUŽENEGA KRALJESTVA se strinja, da lahko zahtevi T-DAB G__00006 in G__00081 souporabljata en blok DAB.
T-DAB_0091	Uprava ZDRUŽENEGA KRALJESTVA se strinja, da lahko zahtevi T-DAB G__00007 in G__00041 souporabljata en blok DAB.
T-DAB_0092	Uprava ZDRUŽENEGA KRALJESTVA se strinja, da lahko zahtevi T-DAB G__00019 in G__00123 souporabljata en blok DAB.
T-DAB_0093	Uprava ZDRUŽENEGA KRALJESTVA se strinja, da lahko zahtevi T-DAB G__00021 in G__00080 souporabljata en blok DAB.
T-DAB_0094	Uprava ZDRUŽENEGA KRALJESTVA se strinja, da lahko zahtevi T-DAB G__00021 in G__00083 souporabljata en blok DAB.
T-DAB_0095	Uprava ZDRUŽENEGA KRALJESTVA se strinja, da lahko zahtevi T-DAB G__00029 in G__00199 souporabljata en blok DAB.
T-DAB_0096	Uprava ZDRUŽENEGA KRALJESTVA se strinja, da lahko zahtevi T-DAB G__00030 in G__00052 souporabljata en blok DAB.
T-DAB_0097	Uprava ZDRUŽENEGA KRALJESTVA se strinja, da lahko zahtevi T-DAB G__00030 in G__00066 souporabljata en blok DAB.
T-DAB_0098	Uprava ZDRUŽENEGA KRALJESTVA se strinja, da lahko zahtevi T-DAB G__00030 in G__00111 souporabljata en blok DAB.
T-DAB_0099	Uprava ZDRUŽENEGA KRALJESTVA se strinja, da lahko zahtevi T-DAB G__00030 in G__00045 souporabljata en blok DAB.
T-DAB_0100	Uprava ZDRUŽENEGA KRALJESTVA se strinja, da lahko zahtevi T-DAB G__00031 in G__00081 souporabljata en blok DAB.

[illegible]

T-DAB_0144	Uprava ZDRUŽENEGA KRALJESTVA se strinja, da lahko zahtevi T-DAB G__00105 in G__00240 souporabljata en blok DAB.
T-DAB_0145	Uprava ZDRUŽENEGA KRALJESTVA se strinja, da lahko zahtevi T-DAB G__00111 in G__00017 souporabljata en blok DAB.
T-DAB_0146	Uprava ZDRUŽENEGA KRALJESTVA se strinja, da lahko zahtevi T-DAB G__00114 in G__00064 souporabljata en blok DAB.
T-DAB_0147	Uprava ZDRUŽENEGA KRALJESTVA se strinja, da lahko zahtevi T-DAB G__00119 in G__00122 souporabljata en blok DAB.
T-DAB_0148	Uprava ZDRUŽENEGA KRALJESTVA se strinja, da lahko zahtevi T-DAB G__00121 in G__00265 souporabljata en blok DAB.
T-DAB_0149	Uprava ZDRUŽENEGA KRALJESTVA se strinja, da lahko zahtevi T-DAB G__00122 in G__00119 souporabljata en blok DAB.
T-DAB_0150	Uprava ZDRUŽENEGA KRALJESTVA se strinja, da lahko zahtevi T-DAB G__00123 in G__00019 souporabljata en blok DAB.
T-DAB_0151	Uprava ZDRUŽENEGA KRALJESTVA se strinja, da lahko zahtevi T-DAB G__00124 in G__00127 souporabljata en blok DAB.
T-DAB_0152	Uprava ZDRUŽENEGA KRALJESTVA se strinja, da lahko zahtevi T-DAB G__00126 in G__00062 souporabljata en blok DAB.
T-DAB_0153	Uprava ZDRUŽENEGA KRALJESTVA se strinja, da lahko zahtevi T-DAB G__00127 in G__00124 souporabljata en blok DAB.
T-DAB_0154	Uprava ZDRUŽENEGA KRALJESTVA se strinja, da lahko zahtevi T-DAB G__00143 in G__00139 souporabljata en blok DAB.
T-DAB_0155	Uprava ZDRUŽENEGA KRALJESTVA se strinja, da lahko zahtevi T-DAB G__00147 in G__00160 souporabljata en blok DAB.
T-DAB_0156	Uprava ZDRUŽENEGA KRALJESTVA se strinja, da lahko zahtevi T-DAB G__00163 in G__00219 souporabljata en blok DAB.
T-DAB_0157	Upravi ZDRUŽENEGA KRALJESTVA in IRSKE sta se sporazumeli, da lahko zahtevi T-DAB G__00163 in IRL80023 souporabljata en blok T-DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0158	Uprava ZDRUŽENEGA KRALJESTVA se strinja, da lahko zahtevi T-DAB G__00165 in G__00267 souporabljata en blok DAB.
T-DAB_0159	Uprava ZDRUŽENEGA KRALJESTVA se strinja, da lahko zahtevi T-DAB G__00178 in G__00263 souporabljata en blok DAB.
T-DAB_0160	Uprava ZDRUŽENEGA KRALJESTVA se strinja, da lahko zahtevi T-DAB G__00195 in G__00059 souporabljata en blok DAB.
T-DAB_0161	Uprava ZDRUŽENEGA KRALJESTVA se strinja, da lahko zahtevi T-DAB G__00195 in G__00062 souporabljata en blok DAB.
T-DAB_0162	Uprava ZDRUŽENEGA KRALJESTVA se strinja, da lahko zahtevi T-DAB G__00199 in G__00029 souporabljata en blok DAB.
T-DAB_0163	Uprava ZDRUŽENEGA KRALJESTVA se strinja, da lahko zahtevi T-DAB G__00217 in G__00223 souporabljata en blok DAB.
T-DAB_0164	Upravi ZDRUŽENEGA KRALJESTVA in IRSKE sta se sporazumeli, da lahko zahtevi T-DAB G__00219 in IRL80023 souporabljata en blok T-DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0165	Uprava ZDRUŽENEGA KRALJESTVA se strinja, da lahko zahtevi T-DAB G__00220 in G__00061 souporabljata en blok DAB.
T-DAB_0166	Uprava ZDRUŽENEGA KRALJESTVA se strinja, da lahko zahtevi T-DAB G__00223 in G__00217 souporabljata en blok DAB.
T-DAB_0167	Uprava ZDRUŽENEGA KRALJESTVA se strinja, da lahko zahtevi T-DAB G__00228 in G__00270 souporabljata en blok DAB.
T-DAB_0168	Upravi ZDRUŽENEGA KRALJESTVA in NIZOZEMSKE sta se sporazumeli, da lahko zahtevi T-DAB G__00232 in HOL30202 souporabljata en blok T-DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0169	Uprava ZDRUŽENEGA KRALJESTVA se strinja, da lahko zahtevi T-DAB G__00236 in G__00251 souporabljata en blok DAB.
T-DAB_0170	Uprava ZDRUŽENEGA KRALJESTVA se strinja, da lahko zahtevi T-DAB G__00240 in G__00105 souporabljata en blok DAB.
T-DAB_0171	Uprava ZDRUŽENEGA KRALJESTVA se strinja, da lahko zahtevi T-DAB G__00258 in G__00261 souporabljata en blok DAB.
T-DAB_0172	Uprava ZDRUŽENEGA KRALJESTVA se strinja, da lahko zahtevi T-DAB G__00260 in G__00104 souporabljata en blok DAB.
T-DAB_0173	Uprava ZDRUŽENEGA KRALJESTVA se strinja, da lahko zahtevi T-DAB G__00261 in G__00258 souporabljata en blok DAB.
T-DAB_0174	Uprava ZDRUŽENEGA KRALJESTVA se strinja, da lahko zahtevi T-DAB G__00263 in G__00178 souporabljata en blok DAB.
T-DAB_0175	Uprava ZDRUŽENEGA KRALJESTVA se strinja, da lahko zahtevi T-DAB G__00264 in G__00100 souporabljata en blok DAB.
T-DAB_0176	Uprava ZDRUŽENEGA KRALJESTVA se strinja, da lahko zahtevi T-DAB G__00265 in G__00121 souporabljata en blok DAB.
T-DAB_0177	Uprava ZDRUŽENEGA KRALJESTVA se strinja, da lahko zahtevi T-DAB G__00265 in G__00269 souporabljata en blok DAB.
T-DAB_0178	Uprava ZDRUŽENEGA KRALJESTVA se strinja, da lahko zahtevi T-DAB G__00269 in G__00265 souporabljata en blok DAB.
T-DAB_0179	Uprava ZDRUŽENEGA KRALJESTVA se strinja, da lahko zahtevi T-DAB G__00270 in G__00228 souporabljata en blok DAB.
T-DAB_0180	Upravi ZDRUŽENEGA KRALJESTVA in IRSKE sta se sporazumeli, da lahko zahtevi T-DAB G__00271 in IRL80028 souporabljata en blok T-DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0181	Uprava MADŽARSKE se strinja, da lahko zahtevi T-DAB HNG30026 in HNG30032 souporabljata en blok DAB.
T-DAB_0182	Uprava MADŽARSKE se strinja, da lahko zahtevi T-DAB HNG30032 in HNG30026 souporabljata en blok DAB.
T-DAB_0183	Upravi NIZOZEMSKE in ZDRUŽENEGA KRALJESTVA sta se sporazumeli, da lahko zahtevi T-DAB HOL30202 in G__00232 souporabljata en blok T-DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0184	Uprava NIZOZEMSKE se strinja, da lahko zahtevi T-DAB HOL30401 in HOL30703 souporabljata en blok DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0185	Uprava NIZOZEMSKE se strinja, da lahko zahtevi T-DAB HOL30408 in HOL30507 souporabljata en blok DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0186	Uprava NIZOZEMSKE se strinja, da lahko zahtevi T-DAB HOL30410 in HOL30403 souporabljata en blok DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.

T-DAB_0187	Uprava NIZOZEMSKE se strinja, da lahko zahtevi T-DAB HOL30507 in HOL30408 souporabljata en blok DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0188	Upravi NIZOZEMSKE in ZDRUŽENEGA KRALJESTVA sta se sporazumeli, da lahko zahtevi T-DAB HOL30702 in G__00035 souporabljata en blok T-DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0189	Uprava NIZOZEMSKE se strinja, da lahko zahtevi T-DAB HOL30703 in HOL30401 souporabljata en blok DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0190	Uprava NIZOZEMSKE se strinja, da lahko zahtevi T-DAB HOL30704 in HOL30807 souporabljata en blok DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0191	Upravi NIZOZEMSKE in ZDRUŽENEGA KRALJESTVA sta se sporazumeli, da lahko zahtevi T-DAB HOL30704 in G__00034 souporabljata en blok T-DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0192	Uprava NIZOZEMSKE se strinja, da lahko zahtevi T-DAB HOL30708 in HOL30807 souporabljata en blok DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0193	Upravi NIZOZEMSKE in ZDRUŽENEGA KRALJESTVA sta se sporazumeli, da lahko zahtevi T-DAB HOL30708 in G__00034 souporabljata en blok T-DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0194	Upravi NIZOZEMSKE in FRANCIE sta se sporazumeli, da lahko zahtevi T-DAB HOL30714 in F__03301 souporabljata en blok T-DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0195	Uprava NIZOZEMSKE se strinja, da lahko zahtevi T-DAB HOL30801 in HOL30802 souporabljata en blok DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0196	Uprava NIZOZEMSKE se strinja, da lahko zahtevi T-DAB HOL30807 in HOL30704 souporabljata en blok DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0197	Uprava NIZOZEMSKE se strinja, da lahko zahtevi T-DAB HOL30807 in HOL30708 souporabljata en blok DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0198	Upravi NIZOZEMSKE in ZDRUŽENEGA KRALJESTVA sta se sporazumeli, da lahko zahtevi T-DAB HOL30807 in G__00034 souporabljata en blok T-DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0199	Upravi NIZOZEMSKE in ZDRUŽENEGA KRALJESTVA sta se sporazumeli, da lahko zahtevi T-DAB HOL30808 in G__00081 souporabljata en blok T-DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0200	Upravi NIZOZEMSKE in ZDRUŽENEGA KRALJESTVA sta se sporazumeli, da lahko zahtevi T-DAB HOL30809 in G__00034 souporabljata en blok T-DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0201	Uprava NIZOZEMSKE se strinja, da lahko zahtevi T-DAB HOL30810 in HOL30811 souporabljata en blok DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0202	Upravi NIZOZEMSKE in ZDRUŽENEGA KRALJESTVA sta se sporazumeli, da lahko zahtevi T-DAB HOL30811 in G__00039 souporabljata en blok T-DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0203	Upravi NIZOZEMSKE in BELGIJE sta se sporazumeli, da lahko zahtevi T-DAB HOL30818 in BEL00002 souporabljata en blok T-DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0204	Upravi NIZOZEMSKE in FRANCIE sta se sporazumeli, da lahko zahtevi T-DAB HOL30821 in F__03301 souporabljata en blok T-DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0205	Upravi NIZOZEMSKE in ZDRUŽENEGA KRALJESTVA sta se sporazumeli, da lahko zahtevi T-DAB HOL31011 in G__00085 souporabljata en blok T-DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0206	Upravi NIZOZEMSKE in ZDRUŽENEGA KRALJESTVA sta se sporazumeli, da lahko zahtevi T-DAB HOL31011 in G__00081 souporabljata en blok T-DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0207	Uprava NIZOZEMSKE se strinja, da lahko zahtevi T-DAB HOL31011 in HOL31003 souporabljata en blok DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0208	Uprava HRVAŠKE se strinja, da lahko zahtevi T-DAB HRV30001 in HRV30003 souporabljata en blok DAB.
T-DAB_0209	Uprava HRVAŠKE se strinja, da lahko zahtevi T-DAB HRV30003 in HRV30001 souporabljata en blok DAB.
T-DAB_0210	Upravi HRVAŠKE in ITALIJE sta se sporazumeli, da lahko zahtevi T-DAB HRV31108 in I__14011 souporabljata en blok T-DAB.
T-DAB_0211	Upravi HRVAŠKE in SLOVENIJE sta se sporazumeli, da lahko zahtevi T-DAB HRV31108 in SVN10005 souporabljata en blok T-DAB. Uporaba (prevedba v dodelitve) obeh razdelitev bo taka, da izračunane poljske jakosti na katerikoli mejni preskusni točki ene ali druge razdelitve ne bodo dosegale navedene dopustne soblokovne moteče poljske jakosti prizadete razdelitve.
T-DAB_0212	Uprava HRVAŠKE se strinja, da lahko zahtevi T-DAB HRV31310 in HRV31109 souporabljata en blok DAB.
T-DAB_0213	Uprava HRVAŠKE se strinja, da lahko zahtevi T-DAB HRV31310 in HRV31110 souporabljata en blok DAB.
T-DAB_0214	Uprava HRVAŠKE se strinja, da lahko zahtevi T-DAB HRV31408 in HRV31208 souporabljata en blok DAB.
T-DAB_0215	Uprava HRVAŠKE se strinja, da lahko zahtevi T-DAB HRV31408 in HRV31409 souporabljata en blok DAB.
T-DAB_0216	Upravi IRSKE in ZDRUŽENEGA KRALJESTVA sta se sporazumeli, da lahko zahtevi T-DAB IRL80009 in G__00238 souporabljata en blok T-DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0217	Upravi IRSKE in ZDRUŽENEGA KRALJESTVA sta se sporazumeli, da lahko zahtevi T-DAB IRL80011 in G__00222 souporabljata en blok T-DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.

T-DAB_0218	Upravi IRSKE in ZDRUŽENEGA KRALJESTVA sta se sporazumeli, da lahko zahtevi T-DAB IRL80023 in G__00219 souporabljata en blok T-DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0219	Upravi IRSKE in ZDRUŽENEGA KRALJESTVA sta se sporazumeli, da lahko zahtevi T-DAB IRL80023 in G__00163 souporabljata en blok T-DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0220	Upravi IRSKE in ZDRUŽENEGA KRALJESTVA sta se sporazumeli, da lahko zahtevi T-DAB IRL80028 in G__00271 souporabljata en blok T-DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0221	Upravi IRSKE in ZDRUŽENEGA KRALJESTVA sta se sporazumeli, da lahko zahtevi T-DAB IRL80029 in G__00069 souporabljata en blok T-DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0222	Uprava ITALIJE se strinja, da lahko zahtevi T-DAB I__03022 in I__03041 souporabljata en blok DAB. Uporaba (prevedba v dodelitve) obeh razdelitev bo taka, da izračunana poljska jakost na katerikoli mejni preskusni točki ene ali druge razdelitve ne bo presegala vrednosti 45 dB(μV/m).
T-DAB_0223	Uprava ITALIJE se strinja, da lahko zahtevi T-DAB I__03022 in I__03103 souporabljata en blok DAB. Uporaba (prevedba v dodelitve) obeh razdelitev bo taka, da izračunana poljska jakost na katerikoli mejni preskusni točki ene ali druge razdelitve ne bo presegala vrednosti 45 dB(μV/m).
T-DAB_0224	Uprava ITALIJE se strinja, da lahko zahtevi T-DAB I__03041 in I__03022 souporabljata en blok DAB. Uporaba (prevedba v dodelitve) obeh razdelitev bo taka, da izračunana poljska jakost na katerikoli mejni preskusni točki ene ali druge razdelitve ne bo presegala vrednosti 45 dB(μV/m).
T-DAB_0225	Uprava ITALIJE se strinja, da lahko zahtevi T-DAB I__03103 in I__03022 souporabljata en blok DAB. Uporaba (prevedba v dodelitve) obeh razdelitev bo taka, da izračunana poljska jakost na katerikoli mejni preskusni točki ene ali druge razdelitve ne bo presegala vrednosti 45 dB(μV/m).
T-DAB_0226	Uprava ITALIJE se strinja, da lahko zahtevi T-DAB I__04023 in I__05051 souporabljata en blok DAB. Uporaba (prevedba v dodelitve) obeh razdelitev bo taka, da izračunana poljska jakost na katerikoli mejni preskusni točki ene ali druge razdelitve ne bo presegala vrednosti 45 dB(μV/m).
T-DAB_0227	Upravi ITALIJE in HRVAŠKE sta se sporazumeli, da lahko zahtevi T-DAB I__05012 in HRV31108 souporabljata en blok T-DAB.
T-DAB_0228	Upravi ITALIJE in SLOVENIJE sta se sporazumeli, da lahko zahtevi T-DAB I__05041 in SVN10010 souporabljata en blok T-DAB. Uporaba (prevedba v dodelitve) obeh razdelitev bo taka, da izračunana poljska jakost na katerikoli mejni preskusni točki ene ali druge razdelitve ne bo presegala vrednosti 45 dB(μV/m).
T-DAB_0229	Uprava ITALIJE se strinja, da lahko zahtevi I__05051 in I__04023 souporabljata en blok DAB. Uporaba (prevedba v dodelitve) obeh razdelitev bo taka, da izračunana poljska jakost na katerikoli mejni preskusni točki ene ali druge razdelitve ne bo presegala vrednosti 45 dB(μV/m).
T-DAB_0230	Uprava ITALIJE se strinja, da lahko zahtevi I__07011 in I__09052 souporabljata en blok DAB. Uporaba (prevedba v dodelitve) obeh razdelitev bo taka, da izračunana poljska jakost na katerikoli mejni preskusni točki ene ali druge razdelitve ne bo presegala vrednosti 45 dB(μV/m).
T-DAB_0231	Uprava ITALIJE se strinja, da lahko zahtevi I__07012 in I__09061 souporabljata en blok DAB. Uporaba (prevedba v dodelitve) obeh razdelitev bo taka, da izračunana poljska jakost na katerikoli mejni preskusni točki ene ali druge razdelitve ne bo presegala vrednosti 45 dB(μV/m).
T-DAB_0232	Uprava ITALIJE se strinja, da lahko zahtevi I__07031 in I__08062 souporabljata en blok DAB. Uporaba (prevedba v dodelitve) obeh razdelitev bo taka, da izračunana poljska jakost na katerikoli mejni preskusni točki ene ali druge razdelitve ne bo presegala vrednosti 45 dB(μV/m).
T-DAB_0233	Uprava ITALIJE se strinja, da lahko zahtevi I__07031 in I__07042 souporabljata en blok DAB. Uporaba (prevedba v dodelitve) obeh razdelitev bo taka, da izračunana poljska jakost na katerikoli mejni preskusni točki ene ali druge razdelitve ne bo presegala vrednosti 45 dB(μV/m).
T-DAB_0234	Upravi ITALIJE in HRVAŠKE sta se sporazumeli, da lahko zahtevi T-DAB I__08022 in HRV31108 souporabljata en blok T-DAB.
T-DAB_0235	Uprava ITALIJE se strinja, da lahko zahtevi T-DAB I__08062 in I__07031 souporabljata en blok DAB. Uporaba (prevedba v dodelitve) obeh razdelitev bo taka, da izračunana poljska jakost na katerikoli mejni preskusni točki ene ali druge razdelitve ne bo presegala vrednosti 45 dB(μV/m).
T-DAB_0236	Uprava ITALIJE se strinja, da lahko zahtevi T-DAB I__08091 in I__05012 souporabljata en blok DAB. Uporaba (prevedba v dodelitve) obeh razdelitev bo taka, da izračunana poljska jakost na katerikoli mejni preskusni točki ene ali druge razdelitve ne bo presegala vrednosti 45 dB(μV/m).
T-DAB_0237	Uprava ITALIJE se strinja, da lahko zahtevi T-DAB I__08091 in I__08022 souporabljata en blok DAB. Uporaba (prevedba v dodelitve) obeh razdelitev bo taka, da izračunana poljska jakost na katerikoli mejni preskusni točki ene ali druge razdelitve ne bo presegala vrednosti 45 dB(μV/m).
T-DAB_0238	Uprava ITALIJE se strinja, da lahko zahtevi T-DAB I__09031 in I__20041 souporabljata en blok DAB. Uporaba (prevedba v dodelitve) obeh razdelitev bo taka, da izračunana poljska jakost na katerikoli mejni preskusni točki ene ali druge razdelitve ne bo presegala vrednosti 45 dB(μV/m).
T-DAB_0239	Uprava ITALIJE se strinja, da lahko zahtevi T-DAB I__09041 in I__07042 souporabljata en blok DAB. Uporaba (prevedba v dodelitve) obeh razdelitev bo taka, da izračunana poljska jakost na katerikoli mejni preskusni točki ene ali druge razdelitve ne bo presegala vrednosti 45 dB(μV/m).

- [illegible]

- [illegible]

T-DAB_0281	Uprava ITALIJE se strinja, da lahko zahtevi T-DAB I__19063 in I__12032 souporabljata en blok DAB. Uporaba (prevedba v dodelitve) obeh razdelitev bo taka, da izračunana poljska jakost na katerikoli mejni preskusni točki ene ali druge razdelitve ne bo presegala vrednosti 45 dB(μV/m).
T-DAB_0282	Uprava ITALIJE se strinja, da lahko zahtevi T-DAB I__19091 in I__18021 souporabljata en blok DAB. Uporaba (prevedba v dodelitve) obeh razdelitev bo taka, da izračunana poljska jakost na katerikoli mejni preskusni točki ene ali druge razdelitve ne bo presegala vrednosti 45 dB(μV/m).
T-DAB_0283	Uprava ITALIJE se strinja, da lahko zahtevi T-DAB I__19091 in I__20022 souporabljata en blok DAB. Uporaba (prevedba v dodelitve) obeh razdelitev bo taka, da izračunana poljska jakost na katerikoli mejni preskusni točki ene ali druge razdelitve ne bo presegala vrednosti 45 dB(μV/m).
T-DAB_0284	Uprava ITALIJE se strinja, da lahko zahtevi T-DAB I__19091 in I__12033 souporabljata en blok DAB. Uporaba (prevedba v dodelitve) obeh razdelitev bo taka, da izračunana poljska jakost na katerikoli mejni preskusni točki ene ali druge razdelitve ne bo presegala vrednosti 45 dB(μV/m).
T-DAB_0285	Uprava ITALIJE se strinja, da lahko zahtevi T-DAB I__20022 in I__19091 souporabljata en blok DAB. Uporaba (prevedba v dodelitve) obeh razdelitev bo taka, da izračunana poljska jakost na katerikoli mejni preskusni točki ene ali druge razdelitve ne bo presegala vrednosti 45 dB(μV/m).
T-DAB_0286	Uprava ITALIJE se strinja, da lahko zahtevi T-DAB I__20022 in I__12033 souporabljata en blok DAB. Uporaba (prevedba v dodelitve) obeh razdelitev bo taka, da izračunana poljska jakost na katerikoli mejni preskusni točki ene ali druge razdelitve ne bo presegala vrednosti 45 dB(μV/m).
T-DAB_0287	Uprava ITALIJE se strinja, da lahko zahtevi T-DAB I__20041 in I__09031 souporabljata en blok DAB. Uporaba (prevedba v dodelitve) obeh razdelitev bo taka, da izračunana poljska jakost na katerikoli mejni preskusni točki ene ali druge razdelitve ne bo presegala vrednosti 45 dB(μV/m).
T-DAB_0288	Uprava ITALIJE se strinja, da lahko zahtevi T-DAB I__20042 in I__09061 souporabljata en blok DAB. Uporaba (prevedba v dodelitve) obeh razdelitev bo taka, da izračunana poljska jakost na katerikoli mejni preskusni točki ene ali druge razdelitve ne bo presegala vrednosti 45 dB(μV/m).
T-DAB_0289	Upravi LATVIJE in FINSKE se strinjata, da lahko zahtevi T-DAB LVA30006 in FIN40002 souporabljata en blok T-DAB. Uporaba (prevedba v dodelitve) obeh razdelitev bo taka, da izračunana poljska jakost na katerikoli mejni preskusni točki ene ali druge razdelitve ne bo presegala vrednosti 41 dB(μV/m).
T-DAB_0290	Uprava MOLDOVE se strinja, da lahko zahtevi T-DAB MDA15008 in MDA15011 souporabljata en blok DAB.
T-DAB_0291	Upravi MOLDOVE in UKRAJINE se strinjata, da lahko zahtevi T-DAB MDA15010 in UKR00067 souporabljata en blok T-DAB. Uporaba (prevedba v dodelitve) obeh razdelitev bo taka, da izračunane poljske jakosti ene razdelitve na katerikoli mejni preskusni točki druge ne bodo dosegale navedene dopustne soblokovne moteče poljske jakosti prizadete razdelitve.
T-DAB_0292	Uprava MOLDOVE se strinja, da lahko zahtevi T-DAB MDA15011 in MDA15008 souporabljata en blok DAB.
T-DAB_0293	Upravi NORVEŠKE in ŠVEDSKE se strinjata, da lahko zahtevi T-DAB NOR00011 in S__00002 souporabljata en blok T-DAB. Ta sporazum zahteva, da Švedska za svoje razdelitve uporablja referenčno omrežje 2. Pri dodelitvah švedskim oddajnikom je treba izpolnjevati te tehnične karakteristike t. Uddevalla, pozicija: 11E5552, 58N2126 višina antene: 100 m e.r.p.: 1000 W Munkedal, pozicija: 11E4042, 58N2801 višina antene: 50 m e.r.p.: 300 W Kungshamn, pozicija: 11E1535, 58N2141 višina antene: 50 m e.r.p.: 300 W Pri oddajnikih Munkedal in Kungshamn naj e.r.p. v sektorju od 330 stopinj do 360 stopinj preseže 50 W.
T-DAB_0294	Upravi NORVEŠKE in DANSKE se strinjata, da lahko zahtevi T-DAB NOR00013 in DNK20039 souporabljata en blok T-DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0295	Uprava NORVEŠKE se strinja, da lahko zahtevi T-DAB NOR00013 in NOR00026 souporabljata en blok DAB.
T-DAB_0296	Upravi NORVEŠKE in DANSKE se strinjata, da lahko zahtevi T-DAB NOR00014 in DNK20051 souporabljata en blok T-DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0297	Uprava NORVEŠKE se strinja, da lahko zahtevi T-DAB NOR00014 in NOR00034 souporabljata en blok DAB.
T-DAB_0298	Upravi NORVEŠKE in DANSKE se strinjata, da lahko zahtevi T-DAB NOR00015 in DNK20052 souporabljata en blok T-DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0299	Upravi NORVEŠKE in DANSKE se strinjata, da lahko zahtevi T-DAB NOR00016 in DNK20038 souporabljata en blok T-DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0300	Uprava NORVEŠKE se strinja, da lahko zahtevi T-DAB NOR00016 in NOR00021 souporabljata en blok DAB.
T-DAB_0301	Uprava NORVEŠKE se strinja, da lahko zahtevi T-DAB NOR00017 in NOR00040 souporabljata en blok DAB.
T-DAB_0302	Uprava NORVEŠKE se strinja, da lahko zahtevi T-DAB NOR00020 in NOR00038 souporabljata en blok DAB.
T-DAB_0303	Uprava NORVEŠKE se strinja, da lahko zahtevi T-DAB NOR00021 in NOR00016 souporabljata en blok DAB.
T-DAB_0304	Uprava NORVEŠKE se strinja, da lahko zahtevi T-DAB NOR00026 in NOR00013 souporabljata en blok DAB.
T-DAB_0305	Uprava NORVEŠKE se strinja, da lahko zahtevi T-DAB NOR00027 in NOR00029 souporabljata en blok DAB.
T-DAB_0306	Uprava NORVEŠKE se strinja, da lahko zahtevi T-DAB NOR00029 in NOR00027 souporabljata en blok DAB.
T-DAB_0307	Uprava NORVEŠKE se strinja, da lahko zahtevi T-DAB NOR00034 in NOR00014 souporabljata en blok DAB.

T-DAB_0308	Upravi NORVEŠKE in ŠVEDSKE se strinjata, da lahko zahtevi T-DAB NOR00035 in S__00001 souporabljata en blok T-DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0309	Uprava NORVEŠKE se strinja, da lahko zahtevi T-DAB NOR00038 in NOR00020 souporabljata en blok DAB.
T-DAB_0310	Upravi NORVEŠKE in DANSKE se strinjata, da lahko zahtevi T-DAB NOR00039 in DNK20037 souporabljata en blok T-DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev. Ta sporazum zahteva, da Norveška za svoje razdelitve uporablja referenčno omrežje 2.
T-DAB_0311	Uprava NORVEŠKE se strinja, da lahko zahtevi T-DAB NOR00039 in NOR00019 souporabljata en blok DAB.
T-DAB_0312	Uprava NORVEŠKE se strinja, da lahko zahtevi T-DAB NOR00039 in NOR00045 souporabljata en blok DAB.
T-DAB_0313	Uprava NORVEŠKE se strinja, da lahko zahtevi T-DAB NOR00039 in NOR00049 souporabljata en blok DAB.
T-DAB_0314	Uprava NORVEŠKE se strinja, da lahko zahtevi T-DAB NOR00040 in NOR00017 souporabljata en blok DAB.
T-DAB_0315	Upravi NORVEŠKE in ŠVEDSKE se strinjata, da lahko zahtevi T-DAB NOR00041 in S__00006 souporabljata en blok T-DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0316	Upravi NORVEŠKE in ŠVEDSKE se strinjata, da lahko zahtevi T-DAB NOR00044 in S__00002 souporabljata en blok T-DAB. Ta sporazum zahteva, da Švedska za svoje razdelitve uporablja referenčno omrežje 2.
T-DAB_0317	Upravi NORVEŠKE in DANSKE se strinjata, da lahko zahtevi T-DAB NOR00054 in DNK20043 souporabljata en blok T-DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0318	Uprava NORVEŠKE se strinja, da lahko zahtevi T-DAB NOR00064 in NOR00072 souporabljata en blok DAB.
T-DAB_0319	Uprava NORVEŠKE se strinja, da lahko zahtevi T-DAB NOR00072 in NOR00064 souporabljata en blok DAB.
T-DAB_0320	Uprava NORVEŠKE se strinja, da lahko zahtevi T-DAB NOR00072 in NOR00079 souporabljata en blok DAB.
T-DAB_0321	Uprava NORVEŠKE se strinja, da lahko zahtevi T-DAB NOR00079 in NOR00072 souporabljata en blok DAB.
T-DAB_0322	Uprava NORVEŠKE se strinja, da lahko zahtevi T-DAB NOR00079 in NOR00087 souporabljata en blok DAB.
T-DAB_0323	Upravi NORVEŠKE in ŠVEDSKE se strinjata, da lahko zahtevi T-DAB NOR00080 in S__00046 souporabljata en blok T-DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0324	Uprava NORVEŠKE se strinja, da lahko zahtevi T-DAB NOR00087 in NOR00079 souporabljata en blok DAB.
T-DAB_0325	Upravi POLJSKE in ŠVEDSKE se strinjata, da lahko zahtevi T-DAB POL30013 in S__00020 souporabljata en blok T-DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0326	Upravi POLJSKE in ŠVEDSKE se strinjata, da lahko zahtevi T-DAB POL30016 in S__00020 souporabljata en blok T-DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0327	Uprava ŠVICE se strinja, da lahko zahtevi T-DAB SUI00106 in SUI00113 souporabljata en blok DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0328	Uprava ŠVICE se strinja, da lahko zahtevi T-DAB SUI00108 in SUI00114 souporabljata en blok DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0329	Uprava ŠVICE se strinja, da lahko zahtevi T-DAB SUI00110 in SUI00111 souporabljata en blok DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0330	Uprava ŠVICE se strinja, da lahko zahtevi T-DAB SUI00110 in SUI00102 souporabljata en blok DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0331	Upravi ŠVICE in FRANCIJE se strinjata, da lahko zahtevi T-DAB SUI00110 in F__03316 souporabljata en blok T-DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0332	Uprava ŠVICE se strinja, da lahko zahtevi T-DAB SUI00113 in SUI00106 souporabljata en blok DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0333	Uprava ŠVICE se strinja, da lahko zahtevi T-DAB SUI00114 in SUI00108 souporabljata en blok DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0334	Upravi SLOVENIJE in AVSTRIJE se strinjata, da lahko zahtevi T-DAB SVN10003 in AUT01021 souporabljata en blok T-DAB. Uporaba (prevedba v dodelitve) obeh razdelitev bo taka, da izračunane poljske jakosti ene razdelitve na katerikoli mejni preskusni točki druge strani ne bodo dosegale navedene dopustne soblokovne moteče poljske jakosti prizadete razdelitve ob upoštevanju geografskih podatkov.
T-DAB_0335	Upravi SLOVENIJE in HRVAŠKE se strinjata, da lahko zahtevi T-DAB SVN10005 in HRV31108 souporabljata en blok T-DAB. Uporaba (prevedba v dodelitve) obeh razdelitev bo taka, da izračunane poljske jakosti ene razdelitve na katerikoli mejni preskusni točki druge razdelitve ne bodo dosegale navedene dopustne soblokovne moteče poljske jakosti prizadete razdelitve.
T-DAB_0336	Upravi SLOVENIJE in ITALIJE se strinjata, da lahko zahtevi T-DAB SVN10010 in I__05041 souporabljata en blok T-DAB. Uporaba (prevedba v dodelitve) obeh razdelitev bo taka, da izračunana poljska jakost na vsaki mejni preskusni točki katerekoli razdelitve ne bo preseгла vrednosti 45 dB(μV/m).
T-DAB_0337	Upravi ŠVEDSKE in DANSKE se strinjata, da lahko zahtevi T-DAB S__00001 in DNK20047 souporabljata en blok T-DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0338	Upravi ŠVEDSKE in DANSKE se strinjata, da lahko zahtevi T-DAB S__00001 in NOR00035 souporabljata en blok T-DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.

T-DAB_0339	Uprava ŠVEDSKE se strinja, da lahko zahtevi T-DAB S__00001 in S__00056 souporabljata en blok DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0340	Upravi ŠVEDSKE in DANSKE se strinjata, da lahko zahtevi T-DAB S__00002 in DNK20011 souporabljata en blok T-DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0341	Upravi ŠVEDSKE in DANSKE se strinjata, da lahko zahtevi T-DAB S__00003 in DNK20045 souporabljata en blok T-DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0342	Uprava ŠVEDSKE se strinja, da lahko zahtevi T-DAB S__00004 in S__00069 souporabljata en blok DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0343	Upravi ŠVEDSKE in DANSKE se strinjata, da lahko zahtevi T-DAB S__00005 in DNK20033 souporabljata en blok T-DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0344	Upravi ŠVEDSKE in NORVEŠKE se strinjata, da lahko zahtevi T-DAB S__00006 in NOR00041 souporabljata en blok T-DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0345	Upravi ŠVEDSKE in DANSKE se strinjata, da lahko zahtevi T-DAB S__00008 in DNK20025 souporabljata en blok T-DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0347	Uprava ŠVEDSKE se strinja, da lahko zahtevi T-DAB S__00012 in S__00025 souporabljata en blok DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0348	Uprava ŠVEDSKE se strinja, da lahko zahtevi T-DAB S__00013 in S__00026 souporabljata en blok DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0349	Upravi ŠVEDSKE in LITVE se strinjata, da lahko zahtevi T-DAB S__00013 in LTU30032 souporabljata en blok T-DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0350	Uprava ŠVEDSKE se strinja, da lahko zahtevi T-DAB S__00014 in S__00062 souporabljata en blok DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0351	Upravi ŠVEDSKE in NEMČIJE se strinjata, da lahko zahtevi T-DAB S__00016 in D__30005 souporabljata en blok T-DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0352	Upravi ŠVEDSKE in DANSKE se strinjata, da lahko zahtevi T-DAB S__00017 in DNK20037 souporabljata en blok T-DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0353	Upravi ŠVEDSKE in POLJSKE se strinjata, da lahko zahtevi T-DAB S__00020 in POL30013 souporabljata en blok T-DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0354	Upravi ŠVEDSKE in POLJSKE se strinjata, da lahko zahtevi T-DAB S__00020 in POL30016 souporabljata en blok T-DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0355	Uprava ŠVEDSKE se strinja, da lahko zahtevi T-DAB S__00025 in S__00012 souporabljata en blok DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0356	Uprava ŠVEDSKE se strinja, da lahko zahtevi T-DAB S__00026 in S__00013 souporabljata en blok DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0357	Upravi ŠVEDSKE in NORVEŠKE se strinjata, da lahko zahtevi T-DAB S__00046 in NOR00080 souporabljata en blok T-DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0358	Upravi ŠVEDSKE in DANSKE se strinjata, da lahko zahtevi T-DAB S__00056 in DNK20047 souporabljata en blok T-DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0359	Uprava ŠVEDSKE se strinja, da lahko zahtevi T-DAB S__00056 in S__00001 souporabljata en blok DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0360	Uprava ŠVEDSKE se strinja, da lahko zahtevi T-DAB S__00062 in S__00014 souporabljata en blok DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0361	Uprava ŠVEDSKE se strinja, da lahko zahtevi T-DAB S__00069 in S__00004 souporabljata en blok DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0362	Upravi TURČIJE in ROMUNIJE se strinjata, da lahko zahtevi T-DAB TUR00002 in ROU00014 souporabljata en blok T-DAB.
T-DAB_0363	Uprava TURČIJE se strinja, da lahko zahtevi T-DAB TUR00003 in TUR00002 souporabljata en blok DAB.
T-DAB_0364	Uprava TURČIJE se strinja, da lahko zahtevi T-DAB TUR00003 in TUR70008 souporabljata en blok DAB.
T-DAB_0365	Upravi FRANCIJE in ŠPANIJE se strinjata, da lahko zahtevi T-DAB F__03366 in E__70420 souporabljata en blok T-DAB. Uporaba (prevedba v dodelitve) obeh razdelitev bo taka, da izračunana poljska jakost na katerikoli mejni preskusni točki ene ali druge razdelitve ne bo presegala vrednosti 41 dB(μV/m).
T-DAB_0366	Upravi FRANCIJE in ŠPANIJE se strinjata, da lahko zahtevi T-DAB F__03366 in E__70339 souporabljata en blok T-DAB. Uporaba (prevedba v dodelitve) obeh razdelitev bo taka, da izračunana poljska jakost na katerikoli mejni preskusni točki ene ali druge razdelitve ne bo presegala vrednosti 41 dB(μV/m).
T-DAB_0367	Upravi FRANCIJE in NIZOZEMSKSE se strinjata, da lahko zahtevi T-DAB F__03301 in HOL30714 souporabljata en blok T-DAB. Uporaba (prevedba v dodelitve) obeh razdelitev bo taka, da izračunana poljska jakost na katerikoli mejni preskusni točki ene ali druge razdelitve ne bo presegala vrednosti 41 dB(μV/m).
T-DAB_0368	Upravi FRANCIJE in ZDRUŽENEGA KRALJESTVA se strinjata, da lahko zahtevi T-DAB F__03245 in G__00053 souporabljata en blok T-DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.

T-DAB_0369	Upravi ZDRUŽENEGA KRALJESTVA in IRSKE se strinjata, da lahko zahtevi T-DAB G__00238 in IRL80009 souporabljata en blok T-DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0370	Upravi ZDRUŽENEGA KRALJESTVA in IRSKE se strinjata, da lahko zahtevi T-DAB G__00222 in IRL80011 souporabljata en blok T-DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0371	Upravi ZDRUŽENEGA KRALJESTVA in FRANCIJE se strinjata, da lahko zahtevi T-DAB G__00053 in F__03245 souporabljata en blok T-DAB. Vsaka razdelitev bo sprejela motenje iz navedenega referenčnega omrežja drugih razdelitev.
T-DAB_0372	Upravi BELGIJE in FRANCIJE se strinjata, da lahko zahtevi T-DAB BEL00008 in F__03350 souporabljata en blok T-DAB. Razdelitev F__03350 bo sprejela motenje, ki ustreza referenčnemu omrežju razdelitve BEL00008 na območju, ki ga določajo te preskusne točke: 002E06/51N00;002E30/50N38;001E55/50N15. Razdelitev F__03350 bo pri uporabi omejena tako, da izračunana poljska jakost na nobeni mejni preskusni točki razdelitve BEL00008 ne bo presegla vrednosti 41 dB(μV/m).
T-DAB_0373	Upravi BELGIJE in NIZOZEMSKSE se strinjata, da lahko zahtevi T-DAB BEL10005 in HOL30709 souporabljata en blok T-DAB. Razdelitev BEL10005 bo sprejela motenje, ki ustreza referenčnemu omrežju razdelitve HOL30709, in bo pri uporabi omejena tako, da izračunana poljska jakost na nobeni mejni preskusni točki razdelitve BEL00008 ne bo presegla vrednosti 45 dB(μV/m).
T-DAB_0401	Upravi ZDRUŽENEGA KRALJESTVA in IRSKE se strinjata, da lahko zahtevi T-DAB G__00148 in souporabljata en blok T-DAB LI.
T-DAB_0402	Upravi ZDRUŽENEGA KRALJESTVA in IRSKE se strinjata, da lahko zahtevi T-DAB G__00143 in souporabljata en blok T-DAB LP.
T-DAB_0403	Upravi IRSKE in ZDRUŽENEGA KRALJESTVA se strinjata, da lahko zahtevi T-DAB IRL80023 in souporabljata en blok T-DAB LH.
T-DAB_0404	Uprava ZDRUŽENEGA KRALJESTVA se strinja, da lahko zahtevi T-DAB G__00006 in G__00085 souporabljata DAB blok LN.
T-DAB_0405	Uprava ŠPANIJE se strinja, da lahko zahteva T-DAB E__70246 uporablja DAB blok LO.
T-DAB_0406	Uprava ŠPANIJE se strinja, da lahko zahteva T-DAB E__70120 uporablja DAB blok LJ.
T-DAB_0407	Uprava ŠPANIJE se strinja, da lahko zahteva T-DAB E__70420 uporablja DAB blok LN.
T-DAB_0408	Uprava ŠPANIJE se strinja, da lahko zahteva T-DAB E__70139 uporablja DAB blok LJ.
T-DAB_0409	Uprava ŠPANIJE se strinja, da lahko zahteva T-DAB E__70339 uporablja DAB blok LN.
T-DAB_0410	Uprava ŠPANIJE se strinja, da lahko zahteva T-DAB E__70148 uporablja DAB blok LL.
T-DAB_0411	Uprava ŠPANIJE se strinja, da lahko zahteva T-DAB E__70648 uporablja DAB blok LD.
T-DAB_0412	Uprava ROMUNIJE se strinja, da lahko zahteva T-DAB ROU30115 uporablja DAB blok LB.
T-DAB_0413	Uprava SLOVAŠKE se strinja, da lahko zahteva T-DAB SVK0307 uporablja DAB blok LH.
T-DAB_0414	Upravi AVSTRIJE in NEMČIJE se strinjata, da lahko zahteva T-DAB AUT01038 uporablja enojni T-DAB LK. Upravi Avstrije in Nemčije se strinjata, da se lahko za avstrijsko razdelitev AUT01038 Salzburg uporabi frekvenčni blok LK namesto frekvenčnega bloka LO.
T-DAB_0415	Upravi NEMČIJE in DANSKE se strinjata, da lahko zahtevi T-DAB D__30097 in souporabljata en blok T-DAB. Razdelitev LK D__30097, ki uporablja blok LK, ne proizvaja negativnih margin na nobeni zahtevani preskusni točki danskih območij razdelitve.
T-DAB_0416	Upravi NIZOZEMSKSE in NEMČIJE se strinjata, da lahko zahteva T-DAB: HOL30806 uporablja T-DAB blok LA HOL30810 uporablja T-DAB blok LC HOL30811 uporablja T-DAB blok LC HOL30901 uporablja T-DAB blok LD HOL30903 uporablja T-DAB blok LD HOL30201 uporablja T-DAB blok LG HOL30202 uporablja T-DAB blok LI Predpostavlja se, da glede soblokovne zaščite kumulativna moteča poljska jakost iz oddajnikov realnega omrežja razdelitev HOL30806, HOL30810, HOL30811, HOL30901, HOL30903, HOL30201, HOL30202, prevedenih v dodelitve, ne bo presegla vrednosti 41 dBμV/m na mejnih preskusnih točkah, ki opisujejo katerikoli potencial, ki zadeva nemško soblokovno razdelitev obnovljenega načrta, izračunan za verjetnost 1 % časa moteče poljske jakosti.
T-DAB_0417	Upravi NIZOZEMSKSE in DANSKE se strinjata, da lahko zahteva T-DAB HOL30806 uporablja T-DAB blok LA HOL30810 uporablja T-DAB blok LC HOL30811 uporablja T-DAB blok LC HOL30901 uporablja T-DAB blok LD HOL30903 uporablja T-DAB blok LD HOL30201 uporablja T-DAB blok LG HOL30201 in DNK20029 souporabljata en blok T-DAB HOL30202 uporablja T-DAB blok LI HOL30202 in DNK20028 souporabljata en blok T-DAB

T-DAB_0418 Upravi NIZOZEMSKE in FRANCIJE se strinjata, da lahko zahteva T-DAB

HOL30806 uporablja T-DAB blok LA
HOL30810 uporablja T-DAB blok LC
HOL30811 uporablja T-DAB blok LC
HOL30901 uporablja T-DAB blok LD
HOL30903 uporablja T-DAB blok LD
HOL30201 uporablja T-DAB blok LG
HOL30202 uporablja T-DAB blok LI

T-DAB_0419 Upravi NIZOZEMSKE in BELGIJE se strinjata, da lahko zahteva T-DAB

HOL30806 uporablja T-DAB blok LA
HOL30810 uporablja T-DAB blok LC
HOL30811 uporablja T-DAB blok LC
HOL30901 uporablja T-DAB blok LD
HOL30903 uporablja T-DAB blok LD
HOL30201 uporablja T-DAB blok LG
HOL30202 uporablja T-DAB blok LI

Predlog je odobren. Dokončen sporazum se sklene po podrobni analizi.

T-DAB_0420 Upravi NIZOZEMSKE in ZDRUŽENEGA KRALJESTVA se strinjata, da lahko zahteva T-DAB

HOL30806 uporablja T-DAB blok LA
HOL30810 uporablja T-DAB blok LC
HOL30811 uporablja T-DAB blok LC
HOL30901 uporablja T-DAB blok LD
HOL30903 uporablja T-DAB blok LD
HOL30201 uporablja T-DAB blok LG
HOL30202 uporablja T-DAB blok LI
HOL30202 in G__00232 souporabljata en blok T-DAB

T-DAB in druge storitve

- OS_0501** Upravi DANSKE in NEMČIJE se strinjata, da lahko zahteva T-DAB DNK20016 uporablja T-DAB blok LO. Zahteva D__WF4 je prizadeta zaradi margine -1,0 dB. Usklajevanje bo zahtevano, če bo ta vrednost presežena pred 31. decembrom 2005.
- OS_0502** Upravi DANSKE in NEMČIJE se strinjata, da lahko zahteva T-DAB DNK20027 uporablja T-DAB blok LO. Nemčija sprejema margino -0,1 dB.
- OS_0503** Upravi DANSKE in NEMČIJE se strinjata, da lahko zahteva T-DAB DNK21718 uporablja T-DAB blok LN. Zahteva D__WF4 je prizadeta zaradi margine -1,8 dB. Usklajevanje bo zahtevano, če bo ta vrednost presežena pred 31. decembrom 2005.
- OS_0505** Upravi SLOVAŠKE in MADŽARSKE sta se sporazumeli glede SVK_DAB_BB3 in druge storitve HNG F3. Sporazumeli sta se, da bo pri usklajevanju uporabe (prevedbe v dodelitev) razdelitve T-DAB SVK izračunavanje poljske jakosti dodelitve temeljilo na terenskih podatkih.
- OS_0506** Upravi SLOVAŠKE in MADŽARSKE sta se sporazumeli glede SVK_DAB_BA3 druge storitve HNG F3. Sporazumeli sta se, da bo pri usklajevanju uporabe (prevedbe v dodelitev) razdelitve T-DAB SVK izračunavanje poljske jakosti dodelitve temeljilo na terenskih podatkih.
- OS_0507** Upravi SLOVAŠKE in MADŽARSKE sta se sporazumeli glede SVK_DAB_NI3 in druge storitve HNG F3. Sporazumeli sta se, da bo pri usklajevanju uporabe (prevedbe v dodelitev) razdelitve T-DAB SVK izračunavanje poljske jakosti dodelitve temeljilo na terenskih podatkih.
- OS_0511** Upravi ČEŠKE in UKRAJINE sta se sporazumeli glede CZE00015 in druge storitve UKR WXR. Sporazumeli sta se, da bo uporaba (prevedbe v dodelitev) razdelitve T-DAB CZE T-DAB taka, da se bodo pri izračunavanju poljske jakosti dodelitve na vsaki mejni prekusni točki upoštevali terenski podatki.
- OS_0512** Upravi SLOVAŠKE in UKRAJINE sta se sporazumeli glede SVK00301 in druge storitve UKR XR. Sporazumeli sta se, da bo uporaba (prevedbe v dodelitev) razdelitve T-DAB SVK taka, da se bodo pri izračunavanju poljske jakosti dodelitev na meji Ukrajine upoštevali terenski podatki.
- OS_0513** Upravi SLOVAŠKE in UKRAJINE sta se sporazumeli glede SVK00302 in druge storitve UKR XR. Sporazumeli sta se, da bo uporaba (prevedbe v dodelitev) razdelitve T-DAB SVK taka, da se bodo pri izračunavanju poljske jakosti dodelitev na meji Ukrajine upoštevali terenski podatki.
- OS_0514** Upravi SLOVAŠKE in UKRAJINE sta se sporazumeli glede SVK00305 in druge storitve UKR XR. Sporazumeli sta se, da bo uporaba (prevedbe v dodelitev) razdelitve T-DAB SVK taka, da se bodo pri izračunavanju poljske jakosti dodelitev na meji Ukrajine upoštevali terenski podatki.
- OS_0515** Upravi ITALIJE in FRANCIJE sta se sporazumeli glede I__01011 in druge storitve F__FB. Sporazumeli sta se, da mora Italija opraviti usklajevanje s Francijo (druga storitev FB, digitalni telefonski sistem točka-točka, IRT 1500), če se T-DAB uporabijo pred letom 2008, za te razdelitve:
I__01011, TORINO_1 (LB);
I__01012, TORINO_2 (LE);
I__01022, ALESSINRIA_2 (LA);
I__01031, ASTI_1 (LD);
I__01051, CUNEO_1 (LD);
I__02011, AOSTA_1 (LA);
I__02011, AOSTA_2 (LB).

Pripomba: Če gre le za digitalni telefonski sistem točka-točka, usklajevanje ni potrebno. Francija bo Italiji priglasila vsako prenehanje svoje druge storitve (FB) in ji sporočila podatke o obstoječih.