


## CILINDRIČNE UTEŽI

Mere uteži (v milimetrih)

Nazivna masa	F	F'	F''	H	E	R	r	o
1 g	6	5,5	3	v odvisnosti od uporabljenega materiala	1	0,9	0,5	1
2 g	6	5,5	3		1	0,9	0,5	1
5 g	8	7	4,5		1,4	1,25	0,5	1
10 g	10	9	6		1,6	1,5	0,5	1
20 g	13	11,5	7,5		2	1,8	0,5	1,5
50 g	18	16	10		3	2,5	1	2
20 g	13	11,5	7,5		2	1,8	0,5	1,5
50 g	18	16	10		3	2,5	1	2
100g	22	20	13		4	3,5	1	2
200g	28	25	16		4,5	4	1,5	3,2
500 g	38	34	22		6	5,5	1,5	3,2
1 kg	48	43	27		8	7	2	5
2 kg	60	54	36		10	9	2	5
5 kg	80	72	46		13	12	2	10
10 kg	100	90	58	17	15	3	10	

brez odprtine za naravnavanje

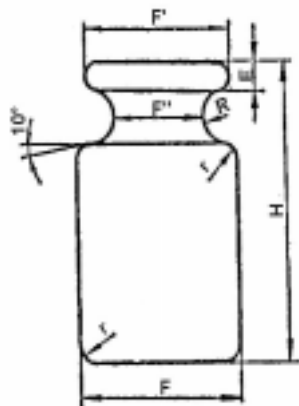

OZNAKA TOČNOSTNEGA RAZREDA



Mere odprtih za naravnavanje (v milimetrih)

Varianta 1



Varianta 2

Nazivna masa (kg)	a	b	c	d	e	f	g	h	t	l	m	n	δ	ε	a	b	c	d	e	t	g	m	n
0,02	po veljavnih predpisih	18	5,5	2,5	6,5	1,5	1	9	M 4x0,5	5	1	5	5	1	3	18	5,5	2,5	6,5	1,5	1	1	5
0,05		25	7,5	3,5	9	2	1	10	M 6x0,5	5	1,5	7	7	1,5	4,5	25	7,5	3,5	9	2	1	1,5	7
0,1		30	7,5	3,5	9	2	1	10	M 6x0,5	5	1,5	7	7	1,5	4,5	30	7,5	3,5	9	2	1	1,5	7
0,2		40	10,5	4,5	12	2,5	1,5	15	M 8x1	8	2	10	10	2	7	40	10,5	4,5	12	2,5	1,5	2	10
0,5		50	10,5	4,5	12	2,5	1,5	15	M 8x1	8	2	10	10	2	7	50	10,5	4,5	12	2,5	1,5	2	10
1		65	18,5	7	20	4	2,5	20	M 14x1,5	13	3	18	18	3	12	65	18,5	7	20	4	2,5	3	18
2		80	18,5	7	20	4	2,5	20	M 14x1,5	13	3	18	18	3	12	80	18,5	7	20	4	2,5	3	18
5		120	24,5	8	26,5	4	2,5	35	M 20x1,5	18	4	24	24	3	18	120	24,5	8	26,5	4	2,5	4	24
10		160	24,5	8	26,5	4	2,5	35	M 20x1,5	18	4	24	24	3	18	160	24,5	8	26,5	4	2,5	4	24

Opomba: Globina odprtine 'b' je orientacijska in se lahko spremeni.

# Odprtina za naravnavanje mase:

## Varianta 1



## Varianta 2

